

SECTION A

ENGINE FUEL SYSTEM—GENERAL



CONTENTS

Division	Paragraph	Subject	Page
I		SPECIFICATIONS AND ADJUSTMENTS:	
	64-1	Specifications and Adjustments	64-2
	64-2	Carburetor Idle Speed & Mixture Adjustments	64-3
	64-3	Throttle Linkage and Dash Pot Adjustments	64-3
II		DESCRIPTION AND OPERATION:	
	64-4	Description of Engine Fuel System	64-6
	64-5	Air Cleaner, Fuel Filter and Ventilator Valve Service	64-7
III		SERVICE PROCEDURES	
IV		TROUBLE DIAGNOSIS:	
	64-6	Hard Starting	64-8
	64-7	Improper Engine Performance	64-10
	64-8	Excessive Fuel Consumption	64-11

DIVISION I SPECIFICATIONS AND ADJUSTMENTS

64-1 SPECIFICATIONS AND ADJUSTMENTS



Gasoline, Grade Required (With 1 & 2-Barrel Carb. Engines)	Regular
Gasoline, Grade Required (With 4-Barrel Carb. Engines)	Premium
Gasoline Tank Capacity (Approximately)	
Series 43-44000	20 Gal.
Series 45-46-48000	25 Gal.
Series 49000	21 Gal.
Gasoline Gauge, Make & Type	A.C. Electric
Fuel Pump, Make	A.C.
Fuel Pump, Type & Location	Mechanical, Left Front Engine
Fuel Pump Pressure—At Carb. Level	
250-350 Engines	3 Lbs. Min.
400-430 Engines	4-1/2 Lbs. Min.
Fuel Pump Volume	1 Pt. in 30 Seconds or Less
Fuel Filter In Carb. Inlet, Make & Type	
1 & 2-Barrel Carb.	A.C., 1 In. Paper, GF-427
4-Barrel Carb.	A.C., 2 In. Paper, GF-441
Fuel Filter, in Gas Tank	Woven Plastic
Carburetor, Make & Type	Rochester, Remote Choke Coil
Carburetor, Barrels & Compression Ratio	
1-Barrel Carb.	8.5 to 1 Comp. Ratio
2-Barrel	9 to 1 Comp. Ratio
4-Barrel	10.25 to 1 Comp. Ratio
Air Cleaner, Make & Material	A.C., Oiled Paper Element
Air Cleaner Element, Type—Standard	
1 & 2-Barrel Carb. Engine	A169CW
4-Barrel Carb. Engine	A212CW

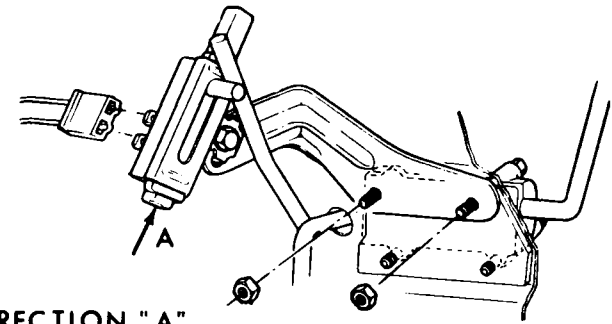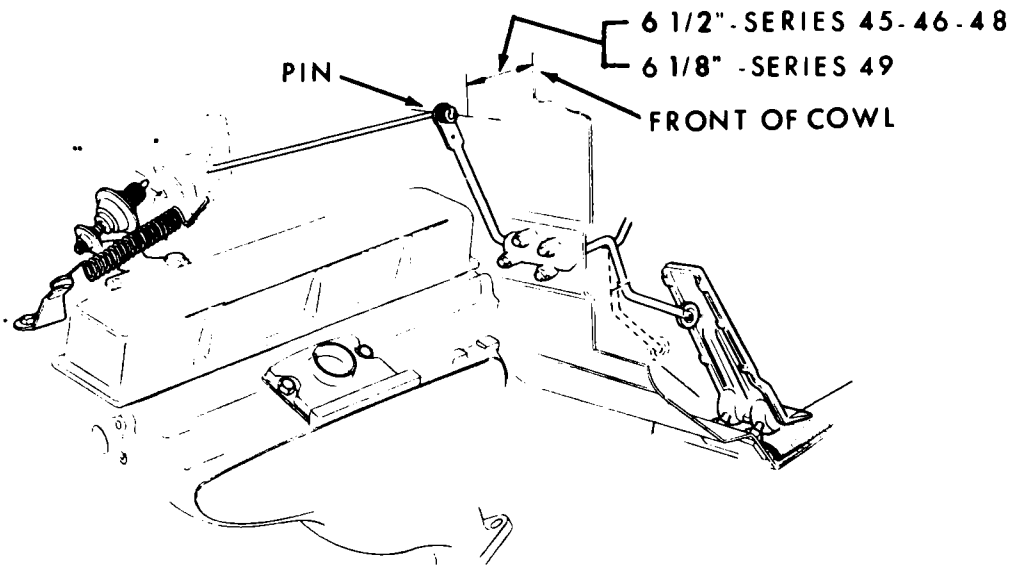

PUSH SWITCH FULLY IN DIRECTION "A"
THEN FULLY DEPRESS ACCELERATOR PEDAL.

DOWNSHIFT SWITCH ADJUSTMENT

THROTTLE LINKAGE ADJUSTMENT
(HOT CURB IDLE POSITION)

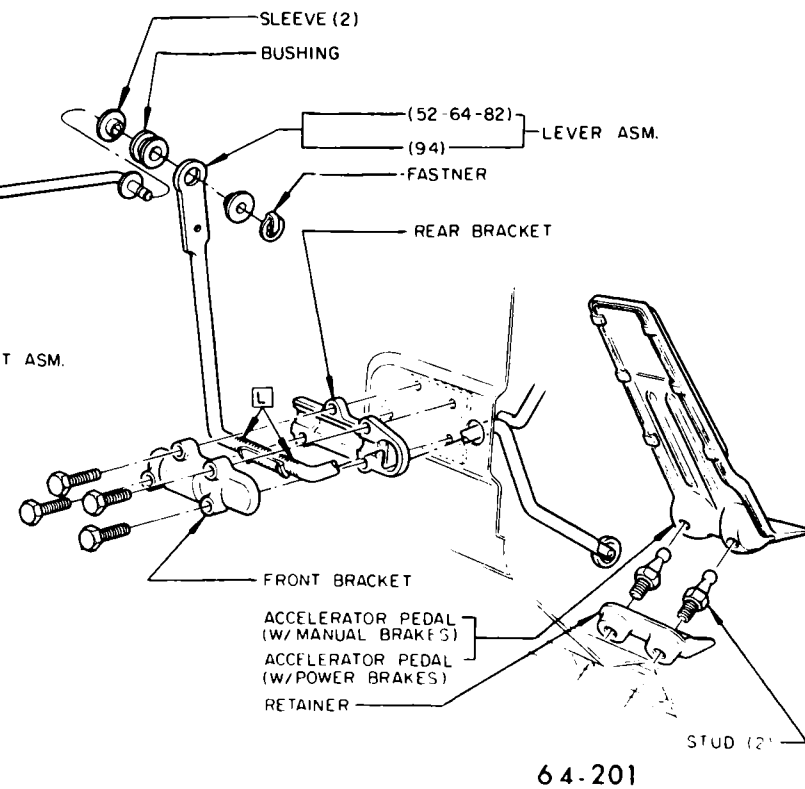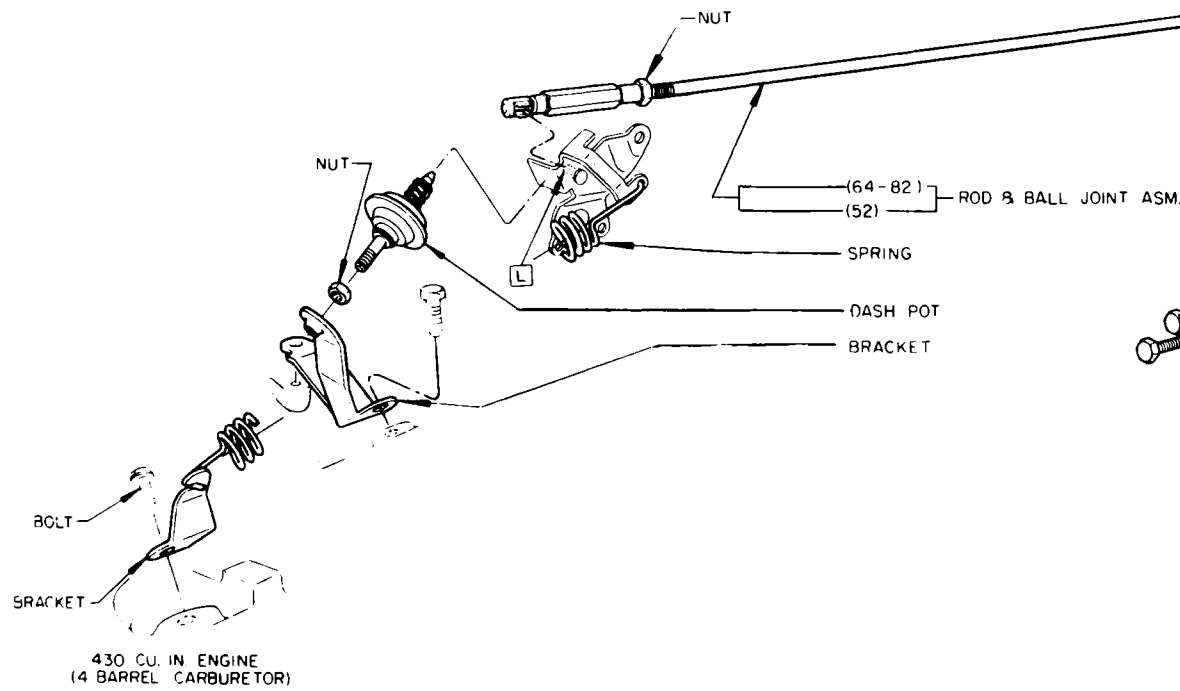

64-201

Figure 64-2—Throttle Linkage - 45-46-48-49000 Series

1. Remove air cleaner. Check throttle linkage for proper lubrication. Make sure that linkage is free in all positions and that nothing touches or interferes with the linkage. Hold choke open and make sure that return spring fully closes throttle, even though throttle is released very slowly.

2. Adjust engine idle speed and mixture. See paragraph 64-2. With throttle linkage in hot curb idle position, measurement from throttle rod pin horizontally to dash must be 6 1/2 inches \pm 1/4 inch (Series 45-46-48000) or 6 1/8 inches \pm 1/4 inch (Series 49000). If measurement is off, shorten or lengthen throttle rod as required to correct. See Figure 64-2.

3. Operate linkage to open carburetor and make sure carburetor wide open stop is contacting.

4. As a final check, have a helper depress accelerator pedal and check to make sure wide open stop contacts at carburetor.

b. Dash Pot Adjustments

Before adjusting the dash pot, the engine idle speed and mixture should be correctly adjusted. With the engine idling at normal operating temperature, adjust the dash pot as follows:

1. While observing dash pot, open carburetor and allow throttle to snap closed. Time dash pot delaying action from the point where the throttle lever hits the dash pot to the point where the lever stops moving. The dash pot should delay or cushion closing action for two seconds; measure two seconds by saying, "One thousand and one, one thousand and two."

2. As a final check, hold car with brakes and put transmission in drive, then jab accelerator pedal. If engine stalls, adjust dash pot for slightly more interference and recheck as necessary.

3. Tighten lock nut securely.

DIVISION II

DESCRIPTION AND OPERATION

64-4 DESCRIPTION OF ENGINE FUEL SYSTEM

a. Fuel Filter

All engines have a pleated paper fuel filter located in the carburetor inlet.

All cars have a woven plastic fuel filter in the fuel tank on the lower end of the pick-up pipe.

b. Fuel Pump

The fuel pump is mounted at the lower left side of the timing chain cover. It is actuated by an eccentric mounted on the front end of the camshaft. The pump is inverted, thereby placing it in a lower, cooler location. It has a built-in air pocket to dampen out pulsations in fuel pressure. The construction and operation of the fuel pump are described in Section 64-B.

All air conditioner equipped cars have a special fuel pump which has a metering outlet for a vapor return system. Any vapor which forms is returned to the fuel tank along with hot fuel through a separate line alongside the fuel supply line. This greatly reduces any possibility of vapor lock by keeping cool fuel from the tank constantly circulating through the fuel pump. All 400 and 430 engines have the vapor return system regardless of whether or not the car is equipped with an air conditioner.

c. Air Cleaner and Intake Silencer

All engines are equipped with oiled paper element cleaners as standard equipment; the op-

tional heavy duty air cleaner is identical except that it contains a two layer element of oiled polyurethane and oiled paper. The air cleaner removes abrasive dust and dirt from the air before it enters the engine through the carburetor. The intake silencer reduces to a very low level the roaring noise made by the air as it is drawn through the intake system. The cleaner and silencer also functions as a flame arrester in event of "backfire" through the intake system.

There are four standard air cleaner and silencer assemblies: one for all L-6 engines, one for 350 two barrel carburetor engines, one for all standard four barrel carburetor engines and one for Gran Sport engines.

Before installing an air cleaner, always make sure the air cleaner gasket is in good condition and is properly located on the carburetor flange. It is important to securely tighten the wing nut by hand to make sure the air cleaner remains stationary and to make sure the gasket seals properly.

For normal operating conditions, the element should be replaced every 24,000 miles (more often under dusty operating conditions).

d. Carburetor Throttle Control Linkage (Upper Series)

The carburetor throttle control linkage is designed to provide positive control of the throttle valves through their entire range without being affected by movement of the engine on its rubber mountings. See Figure 64-1.

The accelerator pedal is mounted on two ball studs which are screwed into weld nuts in the floor pan. Depressing the accelerator pedal causes the pedal to make a rolling contact with a roller on the throttle operating lever, forcing the lower part of

the lever to pivot forward and down. The lever pivots in a bearing mounted on the body cowl. See Figure 64-2.

As the lower part of the throttle operating lever is pushed forward by the accelerator pedal, the upper part of the lever is pulled rearward. This pulls the throttle rod rearward, causing the carburetor throttle lever to open the throttle valves.

The return spring returns the throttle linkage to idle position whenever pressure is released from the accelerator pedal. See Figure 64-2.

On all automatic transmission cars, a dash pot is mounted in position to be contacted by an arm of the carburetor throttle lever as the throttle is closed. The dash pot cushions the closing of the throttle to prevent engine stalling when the accelerator pedal is suddenly released.

On all automatic transmission cars, a transmission downshift switch is mounted inside the car just above the accelerator pedal. When the accelerator pedal is moved to wide open throttle position (fully depressed), the switch contacts are closed, causing the transmission to "downshift". See Figure 64-1 or 2.

64-5 AIR CLEANER, FUEL FILTER AND VENTILATOR VALVE SERVICE

a. Air Cleaner Service

An air cleaner with a dirty element will not properly remove dirt from the air and the dirt entering the engine will cause abnormal formation of carbon, sticking valves, and wear of piston rings and cylinder bores.

Regular replacement of the element at 24,000 mile intervals (or

more frequently in dusty territory) is necessary to prevent excessive engine wear.

b. Fuel Filter—All Engines

All engine fuel filters are located in the carburetor fuel inlet. See Figure 64-4. These fuel filter elements are of pleated paper. Elements are placed in the inlet hole with the cupped end outward. A spring holds the element outward, sealing it by compressing a gasket surface against the inlet fitting. If the element should ever become plugged, pump pressure is sufficient to depress the spring slightly so that some fuel by-passes the element. Thus, a plugged element, instead of causing a car stoppage on the road, allows the engine to continue running on unfiltered fuel. However, the spring pressure is designed to allow only enough fuel to by-pass to let the car run 50 to 60 MPH at a constant speed, or to cut-out at a much lower speed with heavy acceleration. If surging is encountered in the 50 to 60 MPH range, try several hard accelerations; if the engine also runs out of fuel during acceleration, the problem is insufficient fuel, and the most likely reason is a plugged filter. If the owner has "put-up" with this trouble for some time, there is probably dirt in the carburetor due to usage of unfiltered fuel and also due to

"dumping" of dirt from the plugged filter element.

The carburetor inlet fuel filter should be replaced every 12,000 miles.

After assembling any filter element in the carburetor, always start the engine and check for leaks in the fuel line and fittings before installing the air cleaner.

c. Other Filters or Strainers

A woven plastic filter is located on the lower end of the fuel pickup pipe in the gas tank. This filter prevents dirt from entering the fuel line and also stops water unless the filter becomes completely submerged in water. This filter is self cleaning and normally requires no maintenance. Fuel stoppage at this point indicates that the gas tank contains an abnormal amount of sediment or water, the tank should therefore be removed and thoroughly cleaned.

d. Closed Positive Crankcase Ventilator System Service

All cars have a closed positive crankcase ventilating system to help reduce air pollution and to provide more complete scavenging of crankcase impurities. Ventilation air is drawn through a filter assembly located in the air cleaner, through a hose, into the right rocker arm cover, down into the crankcase, across and up into the rear of the intake manifold lifter cover, up through the ventilator valve, through a hose, and into the intake manifold. Intake manifold vacuum draws any fumes from the crankcase to be burned in the engine. See Figure 64-5.

When air flow through the carburetor is high, added air from the positive crankcase ventilating system has no noticeable effect on engine operation; however, at idle



Figure 64-3—Fuel Filter Parts

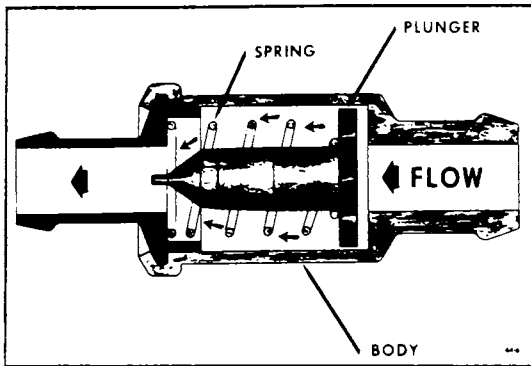


Figure 64-4—Positive Crankcase Ventilator Valve

speed, air flow through the carburetor is so low that any large amount added by the ventilating system would upset the air-fuel mixture, causing rough idle. For this reason, a flow control valve is used which restricts the ventilating system flow whenever intake manifold vacuum is high.

After a period of operation, the ventilator valve tends to become clogged, which reduces and finally stops all crankcase ventilation. An engine which is operated without any crankcase ventilation can be damaged seriously. Therefore, it is important to replace the ventilator valve periodically (each 12,000 miles).

CAUTION: If an engine is idling too slow or rough, this may be caused by a clogged ventilator valve or hose; therefore, never adjust the carburetor idle without first checking the crankcase ventilator check valve and hose.

With the crankcase ventilator system operating normally, about 1/4 of the air used in the idle mixture is supplied through the ventilator valve. Therefore, if the ventilator air is shut off, the idle speed will be noticeably slower. Check operation of the ventilator system as follows:

1. Connect a reliable tachometer and adjust idle as specified.
2. Squeeze-off crankcase ventilator hose to stop all air flow.

3. If idle speed drops 60 RPM or more, crankcase ventilator system is okay.

4. If idle speed drops less than 60 RPM, ventilator system is probably partially clogged; install a new ventilator valve and recheck operation of system as described above.

5. After installing a new ventilator valve, always readjust engine idle.

All cars have a closed P.C.V. system. With this system, any blow-by in excess of the system capacity (from a badly worn engine, sustained heavy load, etc.) is exhausted into the air cleaner and is drawn into the engine.

e. P.C.V. Filter

Service by cleaning every time air cleaner element is replaced. Remove filter from inside air cleaner by removing breather hose clamp, breather hose and filter retainer clip. Wash filter in a suitable solvent and dry by blowing lightly with an air hose. Oil with engine oil, then shake out excess oil. Reinstall in reverse order.

DIVISION IV

TROUBLE DIAGNOSIS

64-6 HARD STARTING

a. Improper Starting Technique

Hard starting may be due to improper starting technique. If possible, observe the owner's method of starting; if not correct, suggest that he use the following procedure.

1. Automatic Transmission. Place control lever in "P" or "N" position. Starter cannot be operated in any other position.

Manual transmission. Place control lever in neutral and depress clutch pedal to floor.

2. Engine Cold. Depress accelerator pedal to floor once, release and remove foot completely from accelerator pedal. This presets the automatic choke and throttle.

Engine Warm. Hold accelerator pedal about 1/3 down.

3. Turn ignition switch to "START" and release when engine starts. As soon as the engine is running smoothly, "jab" the accelerator pedal to slow the engine down to warm up speed.

If the engine is warm, but fails to restart promptly, there may be an excess of fuel or "flooding". (This is more likely to occur at low temperatures.)

Flooding. Hold the accelerator pedal to the floor (fully depressed) while cranking the engine; this opens the choke to "unload" any excess fuel. When the engine fires, do not immediately release the accelerator pedal, but hold it down until the engine speed increases.

If the engine has not been started for several days, most of the fuel will have evaporated from the carburetor. Pumping the accelerator pedal, while cranking, will pump fuel directly into the engine which will hasten the start.

b. Improper Ignition

Before attempting any correction in fuel system make certain that the battery and ignition system are in proper condition. See paragraph 120-4 and 68-28.

c. Improper Adjustment of Fast Idle Cam or Choke Unloader

An incorrectly adjusted fast idle cam may not provide sufficient throttle opening and stalling will result.

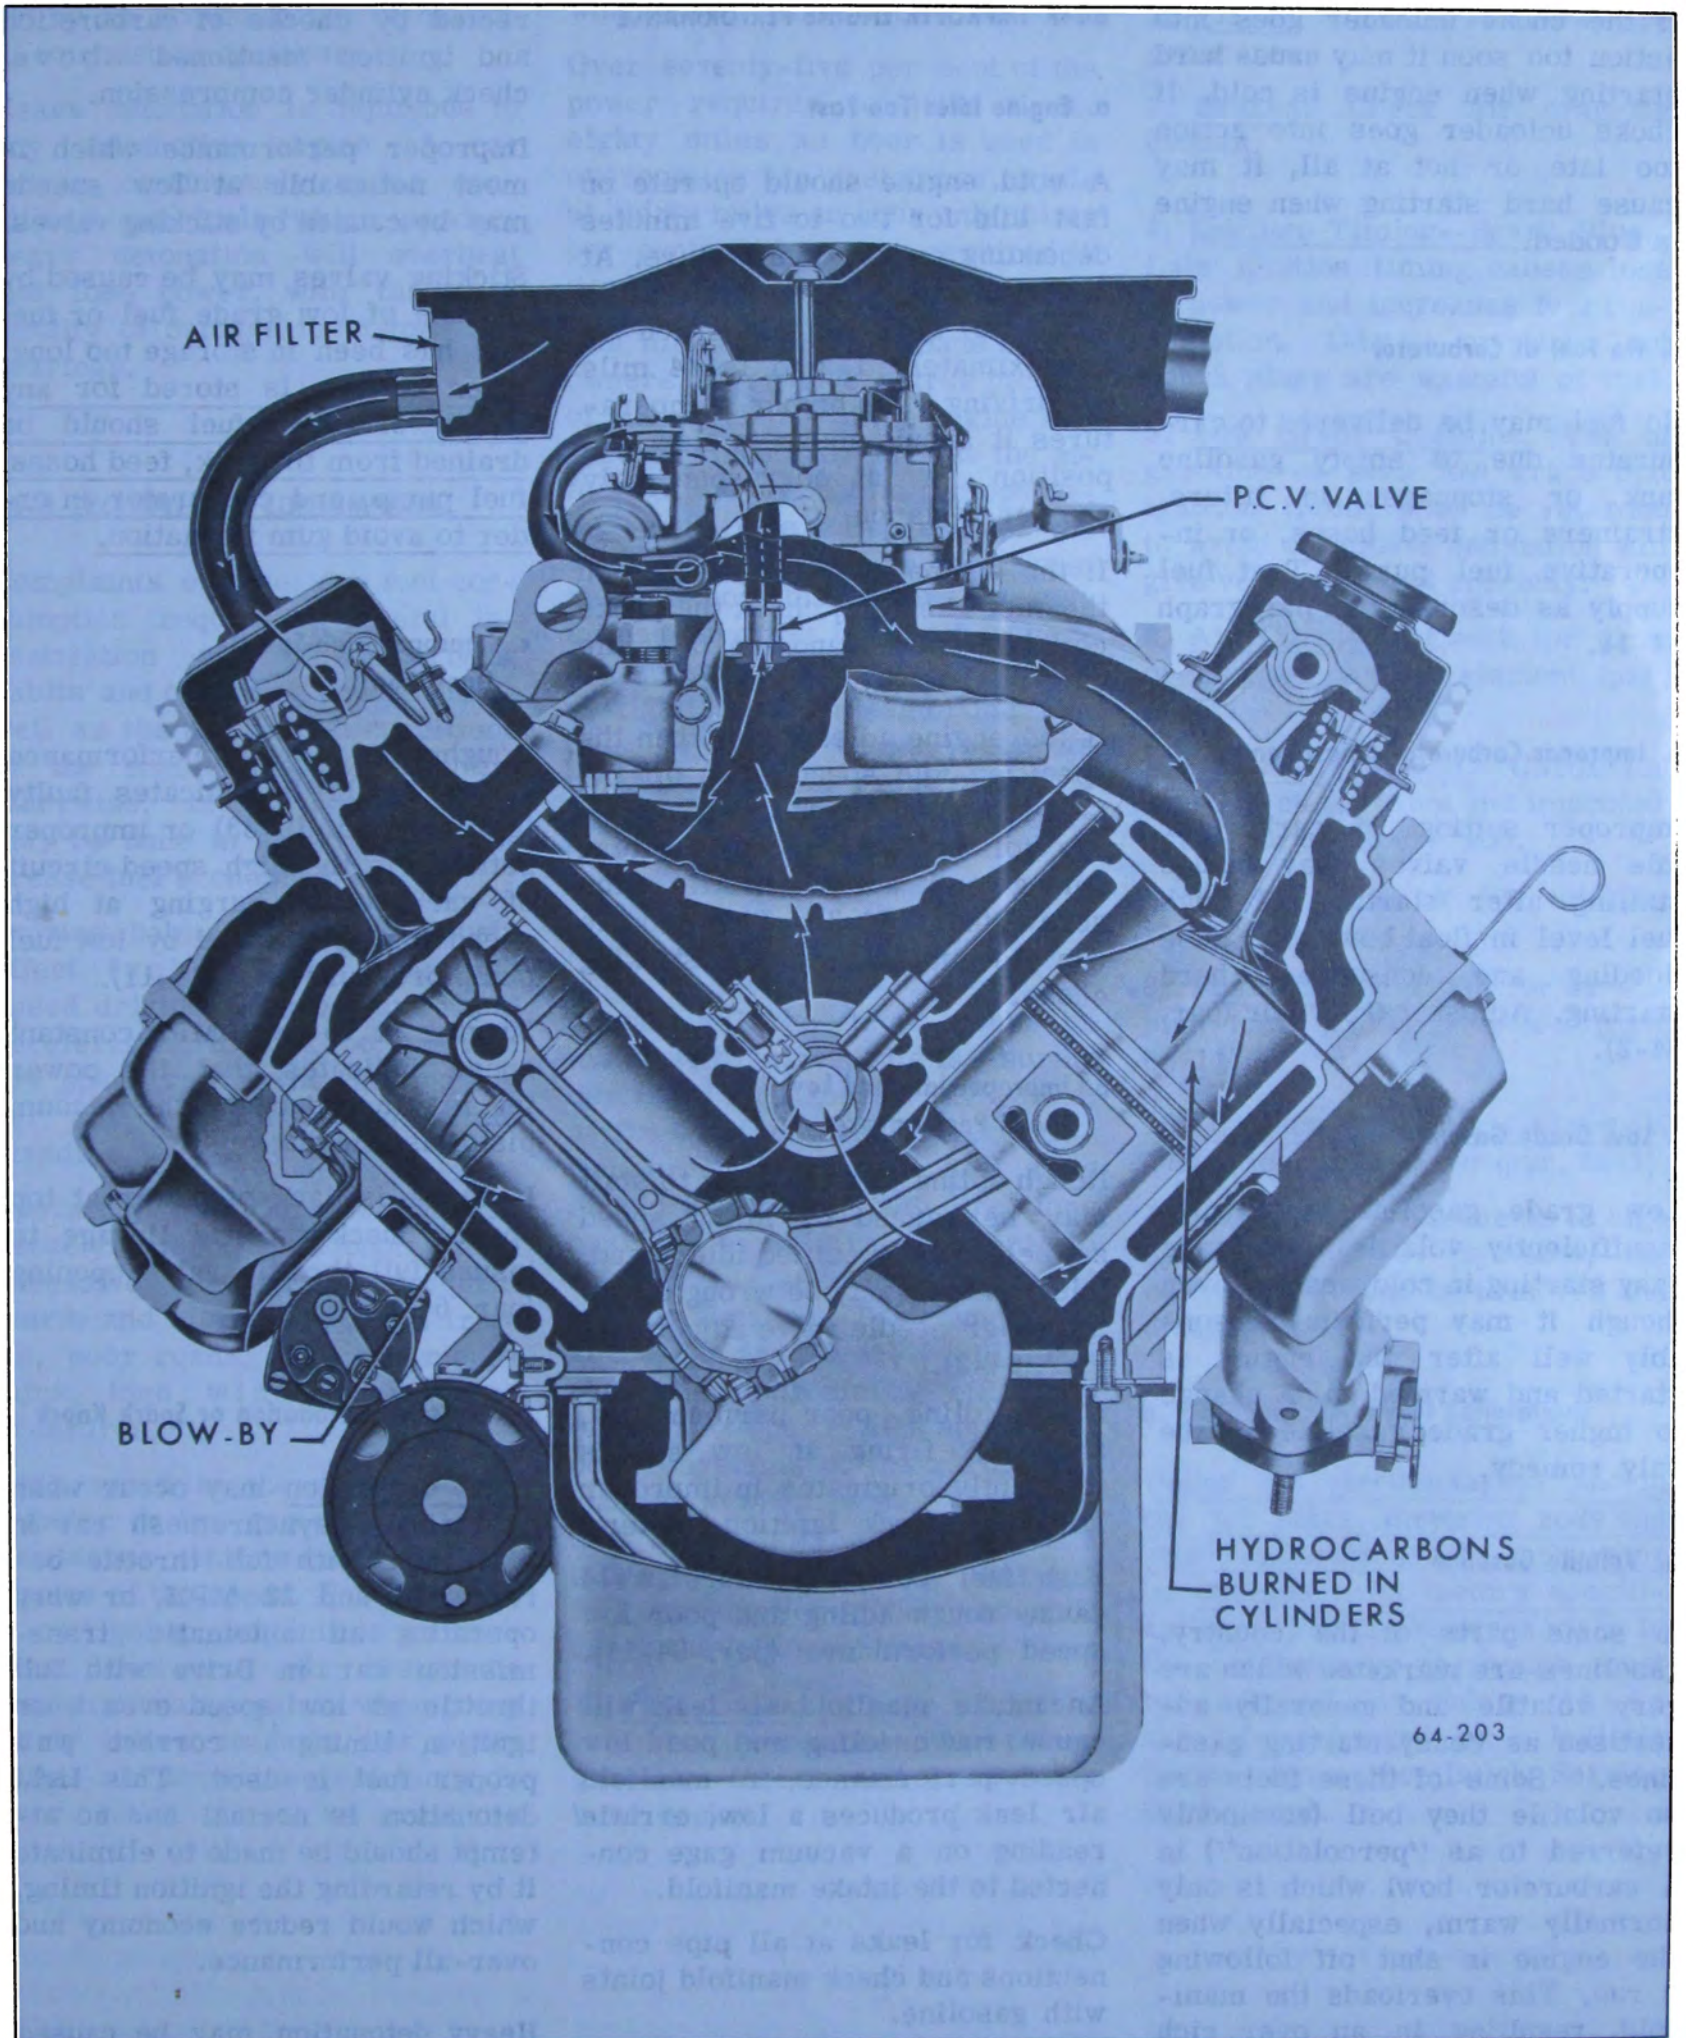


Figure 64-5—Positive Crankcase Ventilator System

If the choke unloader goes into action too soon it may cause hard starting when engine is cold. If choke unloader goes into action too late or not at all, it may cause hard starting when engine is flooded.

d. No Fuel at Carburetor

No fuel may be delivered to carburetor due to empty gasoline tank or stoppages in filters, strainers or feed hoses, or inoperative fuel pump. Test fuel supply as described in paragraph 64-11.

e. Improper Carburetor Adjustment

Improper setting of carburetor idle needle valves may cause stalling after starting. A high fuel level in float bowl will cause flooding and consequent hard starting. Adjust carburetor (par. 64-2).

f. Low Grade Gasoline

Low grade gasoline is usually insufficiently volatile to provide easy starting in cold weather even though it may perform reasonably well after the engine is started and warmed up. A change to higher grade gasoline is the only remedy.

g. Volatile Gasoline

In some parts of the country, gasolines are marketed which are very volatile and generally advertised as "easy starting gasolines." Some of these fuels are so volatile they boil (commonly referred to as "percolation") in a carburetor bowl which is only normally warm, especially when the engine is shut off following a run. This overloads the manifold, resulting in an over rich mixture which may cause "delayed" starting.

64-7 IMPROPER ENGINE PERFORMANCE

a. Engine Idles Too Fast

A cold engine should operate on fast idle for two to five minutes depending on air temperature. At 32°F. the fast idle cam should move to slow idle position in approximately 1/2 to 1 1/4 mile of driving. At higher temperatures it should move to slow idle position in a correspondingly shorter distance.

If the engine operates too long on the fast idle cam, check the choke coil rod setting and the fast idle cam adjustment.

If the engine idles faster than the specified idle speed when off the fast idle cam, check throttle linkage for binding or weak return spring and adjust throttle stop screw (par. 64-3). This trouble can also be caused by a sticking choke.

b. Improper Idle and Low Speed Performance

Rough idling and tendency to stall may be caused by idling speed set below the specified idle speed. Idle mixture may be wrong due to improper needle valve adjustment (par. 64-2).

Rough idling, poor performance, and back firing at low speeds frequently originates in improper ignition. Check ignition system.

High fuel pump pressure will cause rough idling and poor low speed performance (par. 64-11).

An intake manifold air leak will cause rough idling and poor low speed performance. A manifold air leak produces a low, erratic reading on a vacuum gage connected to the intake manifold.

Check for leaks at all pipe connections and check manifold joints with gasoline.

When rough idling and poor low speed performance cannot be cor-

rected by checks of carburetion and ignition mentioned above, check cylinder compression.

Improper performance which is most noticeable at low speeds may be caused by sticking valves.

Sticking valves may be caused by the use of low grade fuel or fuel that has been in storage too long. When a car is stored for any length of time, fuel should be drained from the tank, feed hoses, fuel pump, and carburetor in order to avoid gum formation.

c. Improper High Speed Operation

Roughness or poor performance above 22 MPH indicates faulty ignition (par. 10-33) or improper settings in the high speed circuit of carburetor. Surging at high speed may be caused by low fuel pump pressure (par. 64-11).

Surging at 75 to 80 MPH constant speed indicates that the power jet is stopped up or the vacuum piston is sticking.

If there is lack of power at top speed, check throttle linkage to insure full throttle valve opening (par. 64-3).

d. Excessive Detonation or Spark Knock

Light detonation may occur when operating a synchromesh car in high gear with full throttle between 14 and 22 MPH, or when operating an automatic transmission car in Drive with full throttle at low speed even when ignition timing is correct and proper fuel is used. This light detonation is normal and no attempt should be made to eliminate it by retarding the ignition timing, which would reduce economy and over-all performance.

Heavy detonation may be caused by improper ignition timing (par. 68-24), improper grade of fuel,

or by an accumulation of carbon in combustion chambers.

Heavy detonation is injurious to any automotive engine. A car driven continuously under conditions and fuels which produce heavy detonation will overheat and lose power, with the possibility of damage to pistons and bearings.

64-8 EXCESSIVE FUEL CONSUMPTION

Complaints of excessive fuel consumption require a careful investigation of owner driving habits and operating conditions as well as the mechanical conditions of the engine and fuel system; otherwise, much useless work may be done in an attempt to increase fuel economy.

Driving habits which seriously affect fuel economy are: high speed driving, frequent and rapid acceleration, driving too long in a low speed range when getting under way, excessive idling while standing.

Operating conditions which adversely affect fuel economy are: excessive acceleration, frequent starts and stops, congested traffic, poor roads, hills and mountains, high winds, low tire pressures.

High speed is the greatest contributor to low gas mileage. Air resistance increases as the square of the speed. For instance, a car going sixty miles an hour must overcome air resistance four times as great as when going thirty miles an hour. At eighty miles an hour the resistance is over seven times as great as

when going thirty miles an hour.

Over seventy-five per cent of the power required to drive a car eighty miles an hour is used in overcoming air resistance, while at thirty miles an hour only thirty per cent of the power required is used to overcome air resistance.

Gas mileage records made by car owners never give a true picture of the efficiency of the engine fuel system since they include the effects of driving habits and operating conditions. Because of the wide variation in these conditions, it is impossible to give average mileage figures for cars in general use; therefore, any investigation of a mileage complaint must be based on an accurate measurement of gasoline consumption per mile under proper test conditions.

a. Gasoline Mileage Test

A gas mileage test should be made with an accurate measuring device on a reasonably level road, at fixed speeds, without acceleration or deceleration. Test runs should be made in both directions over the same stretch of road to average the effect of grades and wind resistance. Test runs made at 30, 50 and 70 MPH will indicate the approximate efficiency of the low speed, high speed, and power systems of the carburetor and show whether fuel consumption is actually abnormal. If a mileage test indicates that the fuel consumption is above normal, check the following items.

1. Fuel Leaks. Check all gasoline hose connections, fuel pump, gasoline filter, and carburetor bowl gasket.

2. Tires. Check for low tire pressures.

3. Brakes. Check for dragging brakes.

4. Ignition Timing--Spark Plugs. Late ignition timing causes loss of power and increases fuel consumption. Dirty or worn out spark plugs are wasteful of fuel.

5. Low Grade Gasoline. Use of gasoline of such low grade that ignition timing must be retarded to avoid excessive detonation will give very poor fuel economy.

6. Air Cleaner. Check for dirty or clogged cleaner element (par. 64-5).

7. Automatic Choke. Check for sticking choke valve and improper setting of choke coil rod.

8. Valves. Check for sticking valves.

9. Fuel Pump. Check for excessive fuel pump pressure (par. 64-11).

10. Carburetor Adjustment. Check idle adjustment (par. 64-1).

For all other adjustments to high speed and power systems, the carburetors must be removed and disassembled.

b. Changing Carburetor Calibrations

Under no circumstances should the jet sizes, metering rods and other calibrations of a carburetor be changed from factory specifications. The calibrations given in the calibrations paragraph must be adhered to unless these are later changed by a bulletin issued from the Buick Service Department.