

SECTION B

EXHAUST SYSTEM

CONTENTS

Division	Subject	Paragraph
I	SPECIFICATIONS AND ADJUSTMENTS:	
II	DESCRIPTION AND OPERATION: Description of Exhaust System.....	80-3
III	SERVICE PROCEDURES: Removal and Installation of Exhaust System Parts.....	80-4
IV	TROUBLE DIAGNOSIS:	

DIVISION II

DESCRIPTION and OPERATION

80-3 DESCRIPTION OF EXHAUST SYSTEM

Only single exhaust is available on 43-44000 Series Buicks, except the G.S. 350 and 400. On G.S. models, dual exhaust is standard equipment. Single exhaust is standard on all 45-46-48000 Series cars. Dual exhaust is available as an option on Wildcats and Electras.

The 43-44000 Series exhaust systems do not have resonators (except the Sport Wagon). The Sport Wagon has a resonator mounted crosswise just behind the rear axle. Regular wagons have a tail pipe which crosses-over just behind the rear axle. In all wagons, the tail pipe exits just behind the left rear tire; this reduces the possibility of having exhaust gas enter an open tail gate window.

All 45-46-48-49000 Series exhaust pipes, plus the 43-44000 G.S.

models, are of the double wall laminated type. This double layer pipe is used to muffle pipe "ring" which is set-up by the firing impulses of the individual cylinders; the life of the pipe is also greatly increased.

For long life, all mufflers and resonators are aluminized. All tail pipes are also aluminized inside and out. Since rusting is more rapid on the "cold" side of a dual exhaust system (the side having the exhaust manifold shut off valve), all cold side mufflers have stainless steel inner shells, baffles and end caps. Both dual exhaust resonators are of stainless steel construction.

All exhaust pipe connections to exhaust manifolds are of the ball joint type to allow angular movement for alignment purposes. On all single exhaust systems, the rear end of the front exhaust pipe (crossover) assembly is also of the ball joint type. Rivas have ball joints between the mufflers and resonators to allow accurate resonator alignment. All other connections are of the slip joint type. No gaskets are used in the entire system.

The muffler is of the oval-shaped dynamic flow type having very low back pressure. It is double wrapped of heavy gage aluminized steel with a layer of asbestos placed between wrappings to aid in reduction of noise transfer and to prevent any "oil-canning" effect. The exhaust system is supported by free hanging rubber-fabric mountings which permit free movement of the system but do not permit transfer of noise and vibration into the passenger compartment.

DIVISION III

SERVICE PROCEDURES

80-4 REMOVAL AND INSTALLATION OF EXHAUST SYSTEM PARTS

a. Removal and Installation of Muffler

The following instructions apply, in general, to all exhaust systems. For specific information, see the illustrations following this paragraph.

1. Remove U-bolts and clamps from muffler inlet and outlet nipples.

2. Split muffler inlet and outlet nipples on opposite sides so that they are loose on inner pipes. Be careful zotto damage inner pipes.

3. Disconnect front or intermediate exhaust pipe at forward end ball joint by removing bolts or nuts.

4. Pull exhaust pipe forward and twist to disengage from muffler. Lay exhaust pipe on floor.

5. Remove old muffler by pulling forward and twisting.

6. Subassemble exhaust pipe and new muffler on floor, tightening new U-bolt and nuts just snug so that muffler will move but will stay where moved.

7. Raise exhaust pipe-muffler subassembly into position and insatall new bolts or nuts at forward ball joint just snug.

8. Install new U-bolt and nuts at rear of muffler just snug.

9. Align muffler and exhaust pipe. See illustration that applies - Figures 80-6 through 12.

10. Tighten all bolts and nuts.

b. Removal and Installation of Resonator

1. Remove tail pipe clamp bolt and spread clamp so that resonator-tail pipe assembly will slide through clamp.

2. Split resonator inlet nipple on opposite sides so that it is loose on rear exhaust pipe. Be careful not to damage exhaust pipe.

3. Slide old resonator to rear and then forward out of tail pipe clamp.

4. Install new hanger where necessary.

5. Install new resonator-tail pipe assembly.

6. Install new U-bolt and clamp. Install new tail pipe hanger bolt. Tighten all nuts so that resonator can be moved, but will stay where moved.

7. Align resonator assembly. See illustration that applies - Figures 80-6 through 12.

8. Tighten all clamps.

c. Removal and Installation of Front or Intermediate Exhaust Pipe

1. Cut off defective exhaust pipe just forward of muffler nipple.

2. Remove U-bolt and clamp from forward muffler nipple. Disconnect exhaust pipe at forward end ball joint by removing bolts or nuts.

3. Split stub end of exhaust pipe in muffler, being careful not to damage muffler nipple. Collapse stub end and remove.

4. Raise new exhaust pipe into

position and install new bolts or nuts at forward ball joint just snug.

5. Install new U-bolt and clamp just snug.

6. Align exhaust pipe. See illustration that applies - Figures 80-6 through 12.

7. Tighten all bolts and nuts.

d. Removal and Installation of Tail Pipe

1. Raise car so that rear axle and frame are separated as far as possible.

2. Cut off defective tail pipe just rearward of muffler nipple.

3. Remove tail pipe clamp bolt and spread clamp. Remove old tail pipe.

4. Split stub end of tail pipe in muffler, being careful not to damage muffler nipple. Collapse stub end and remove.

5. Position new tail pipe over rear axle and into position.

6. Install new U-bolt and clamp. Install new tail pipe hanger clamp bolt. Tighten all nuts just snug.

7. Align tail pipe. See Figures 80-6 through 12.

8. Tighten all nuts.

Be sure to reseal access cover during installation.

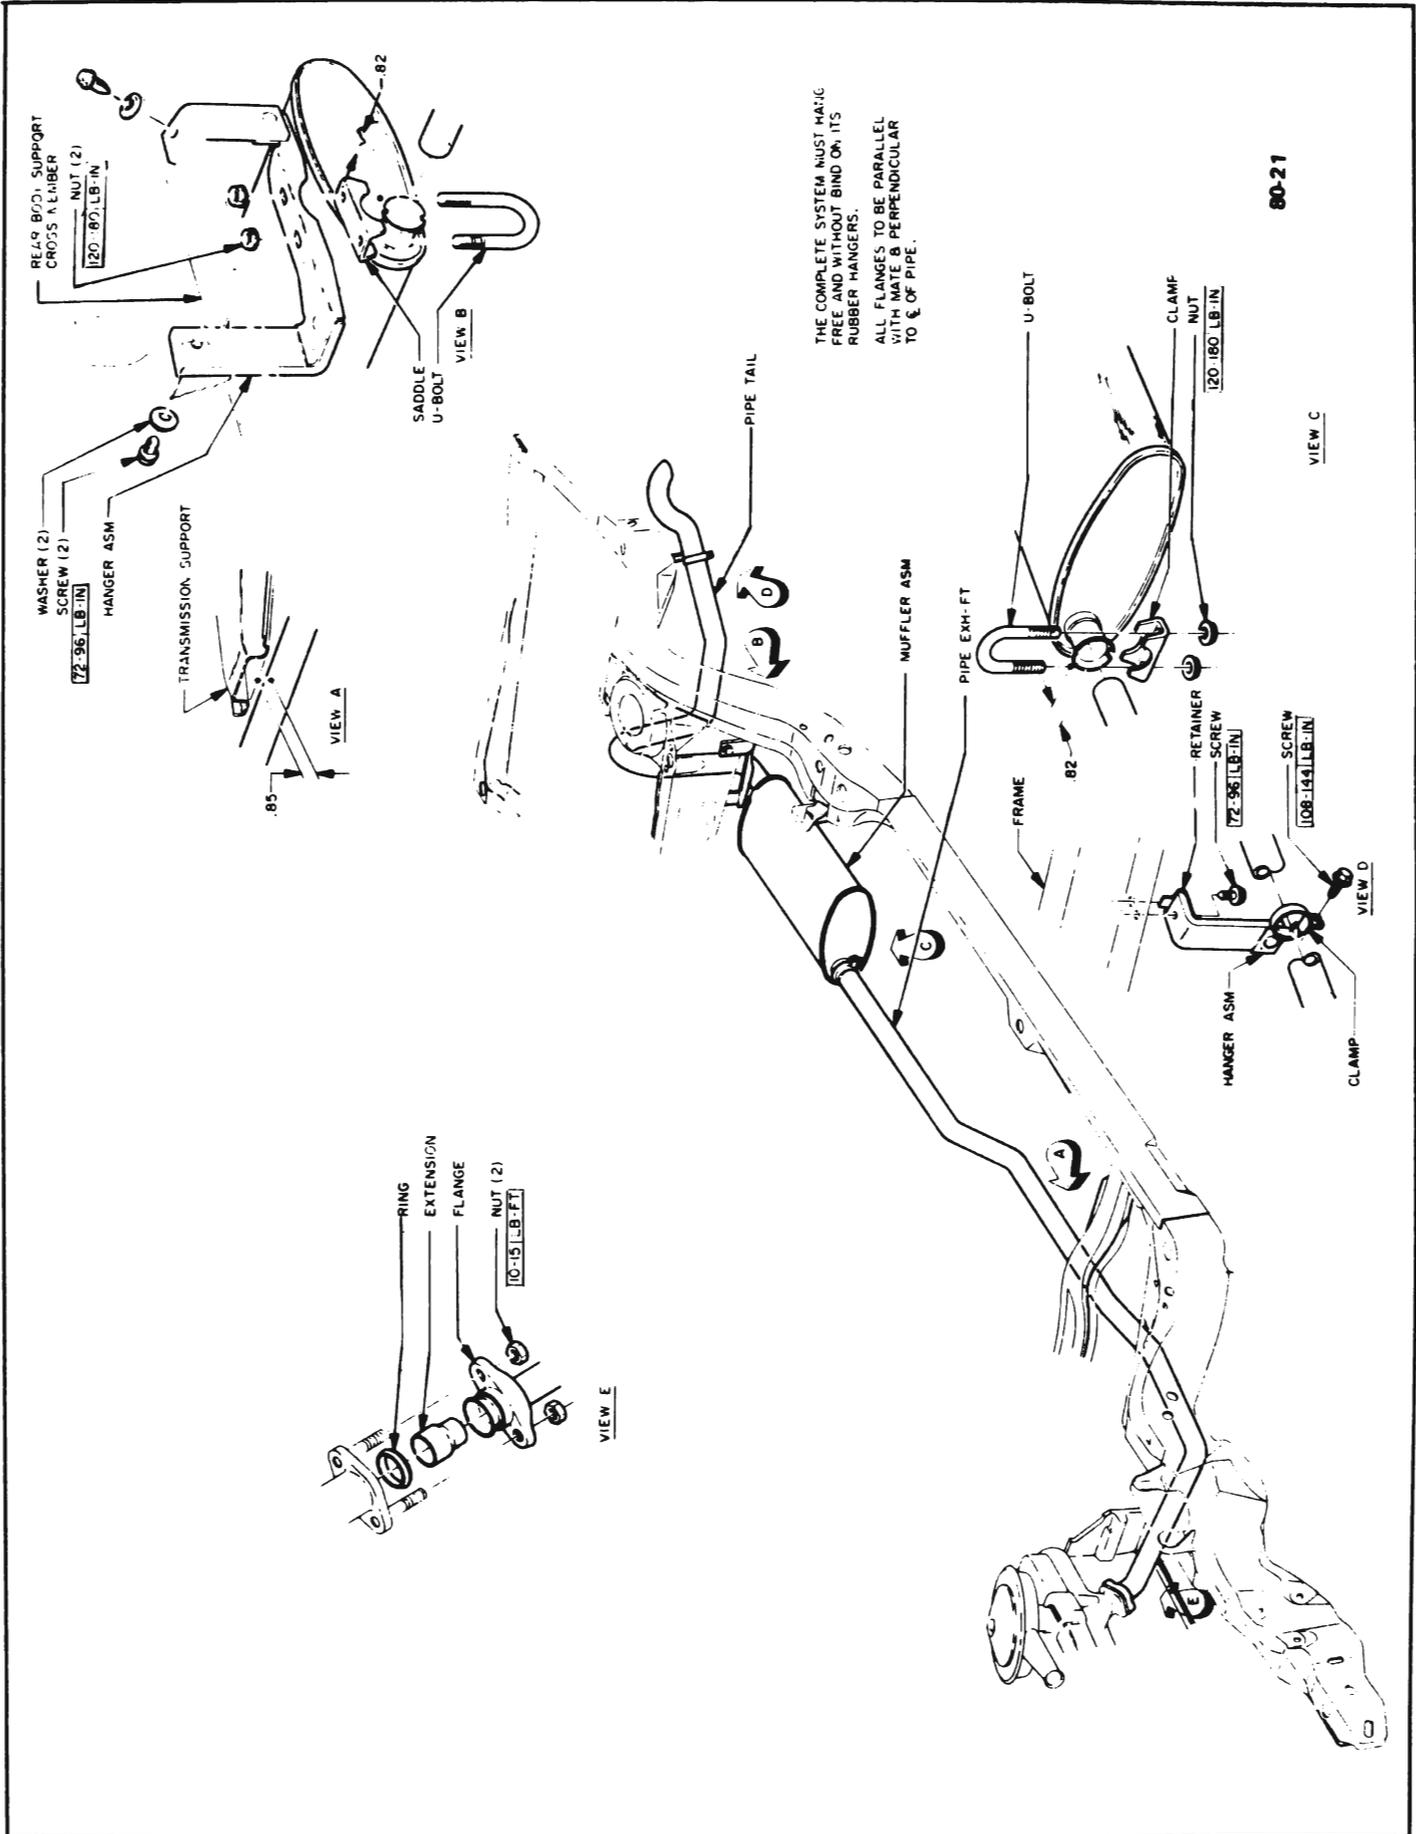


Figure 80-6 Exhaust System - L-6 Special and Skylark

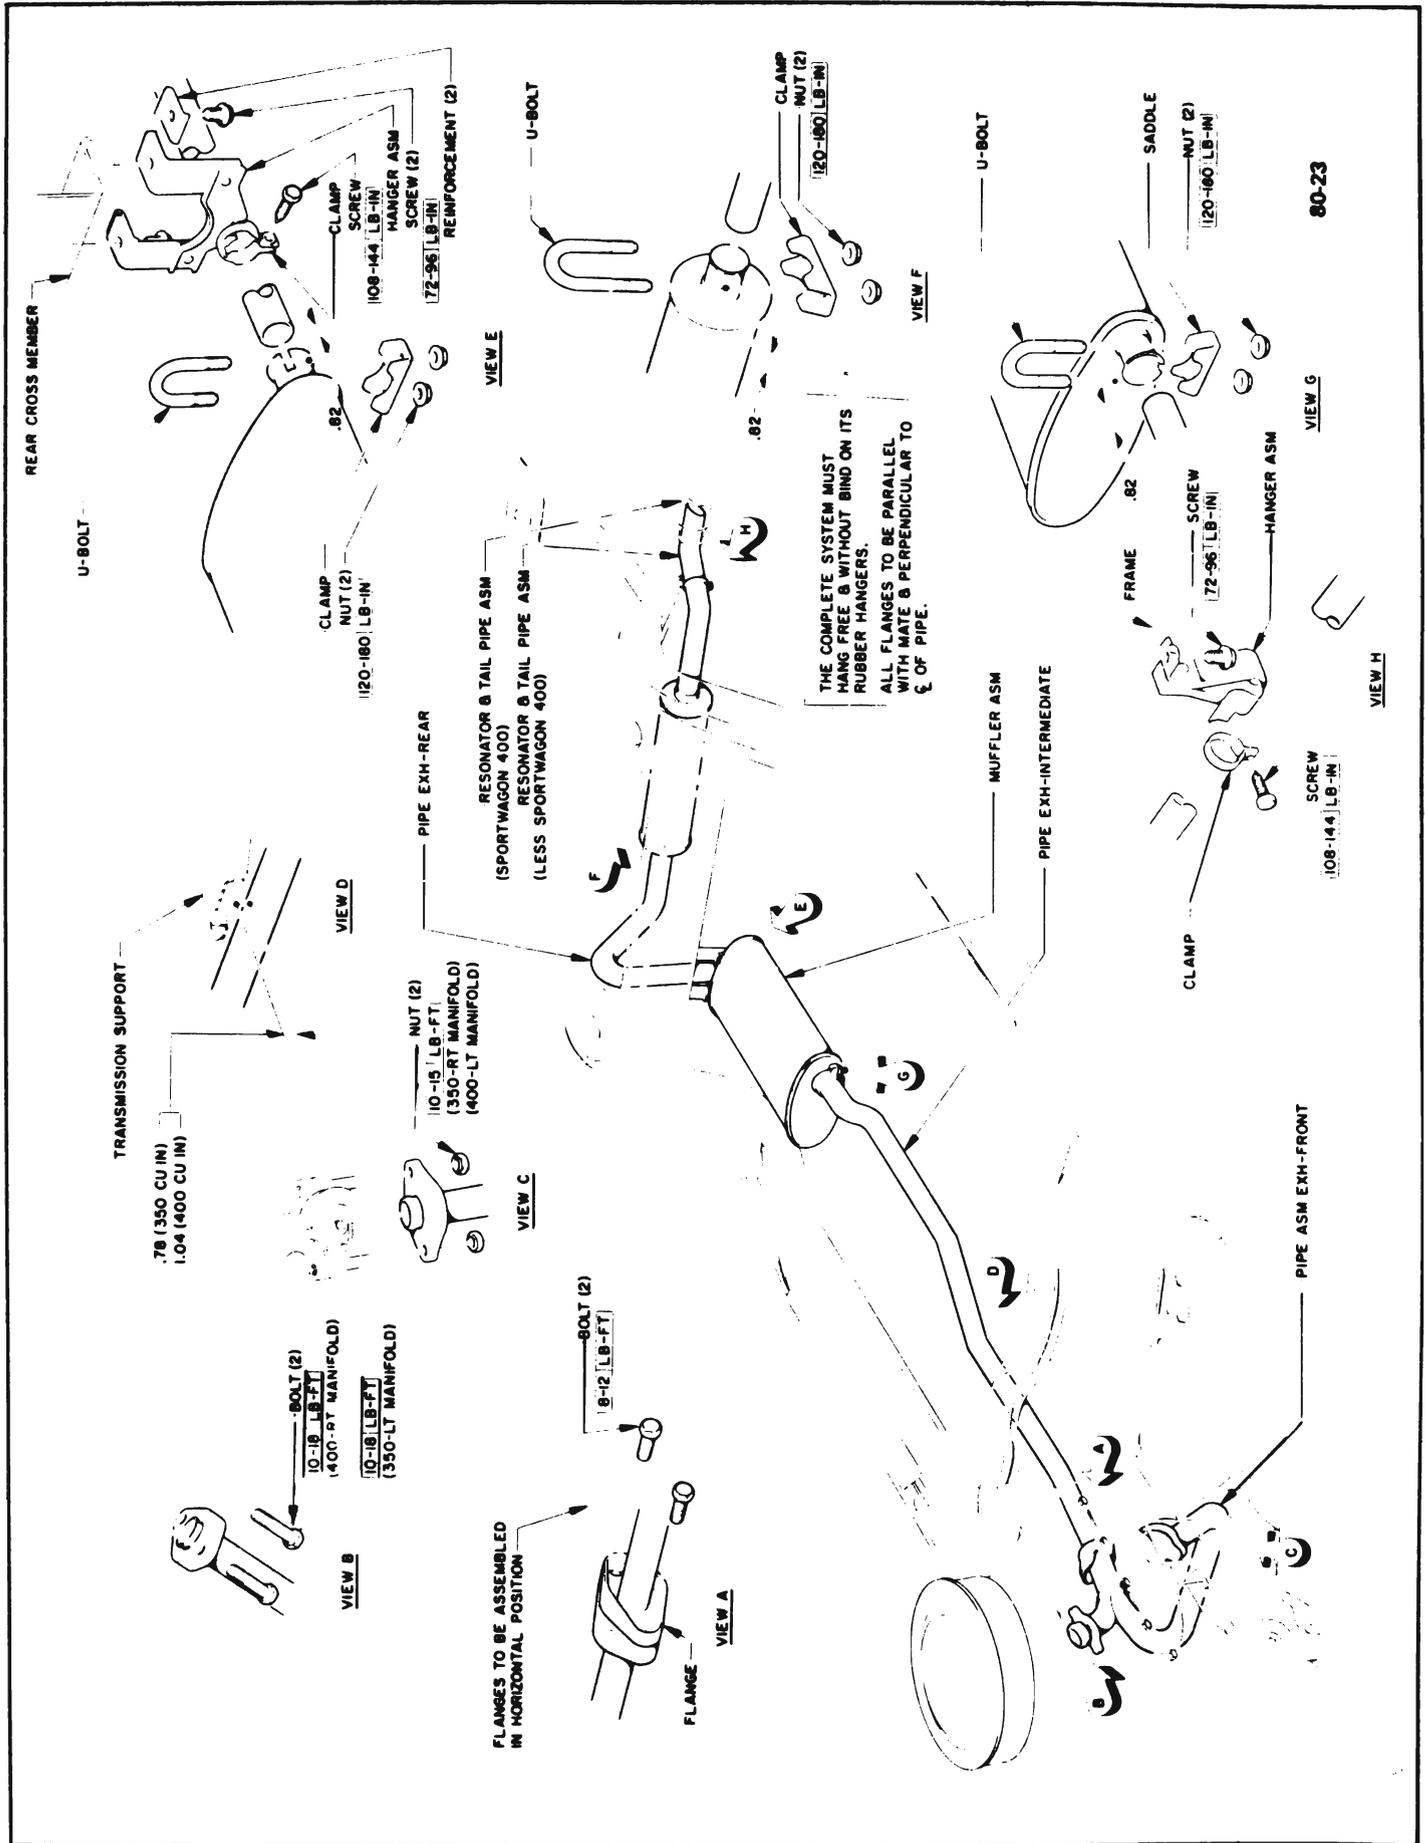


Figure 80-8 Exhaust System - Sport Wagon

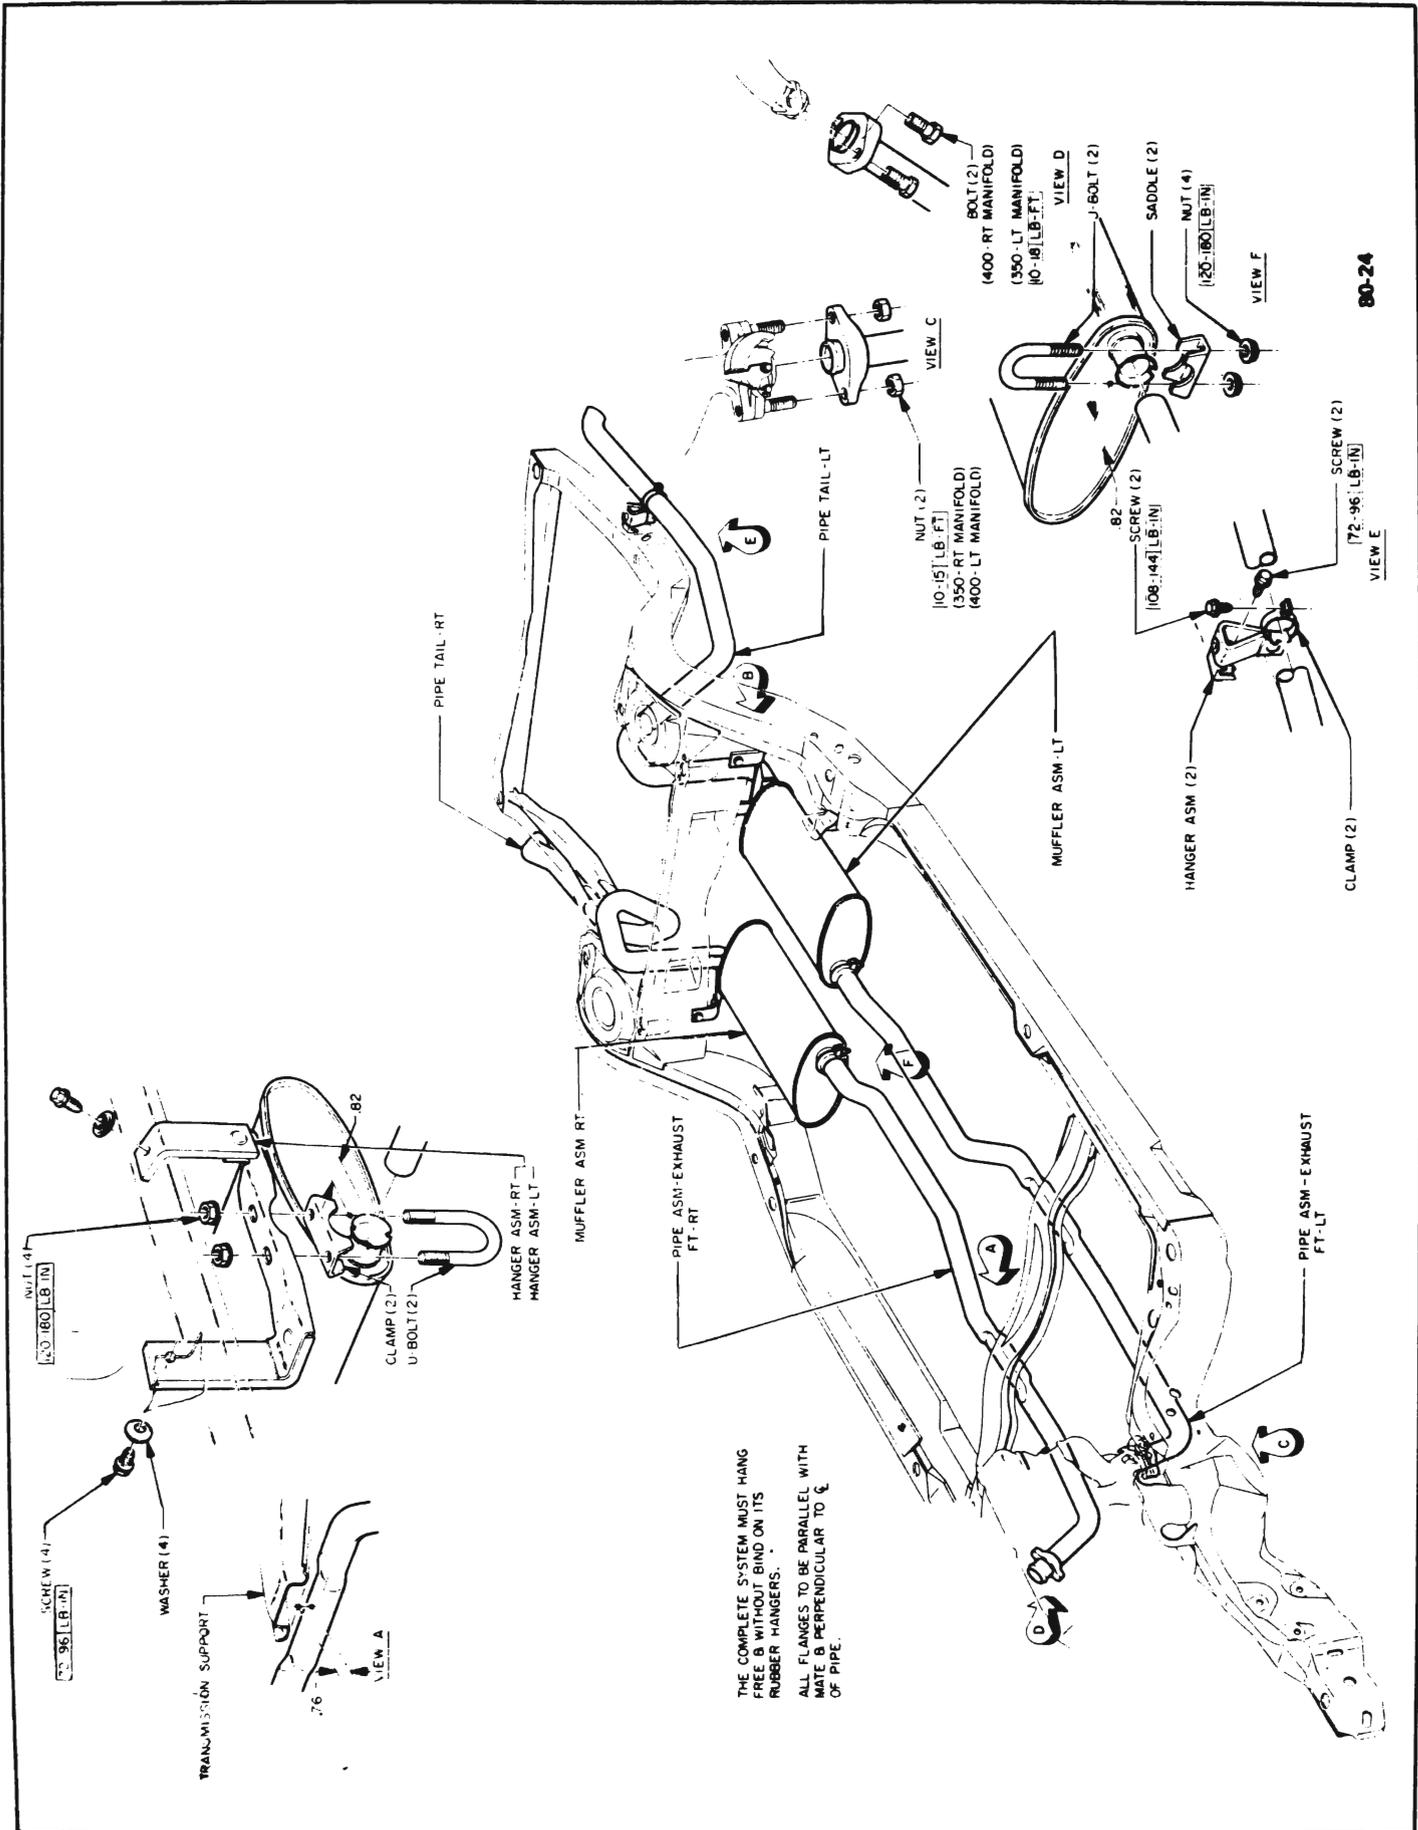


Figure 80-9 Exhaust System - G.S. 350 and 400

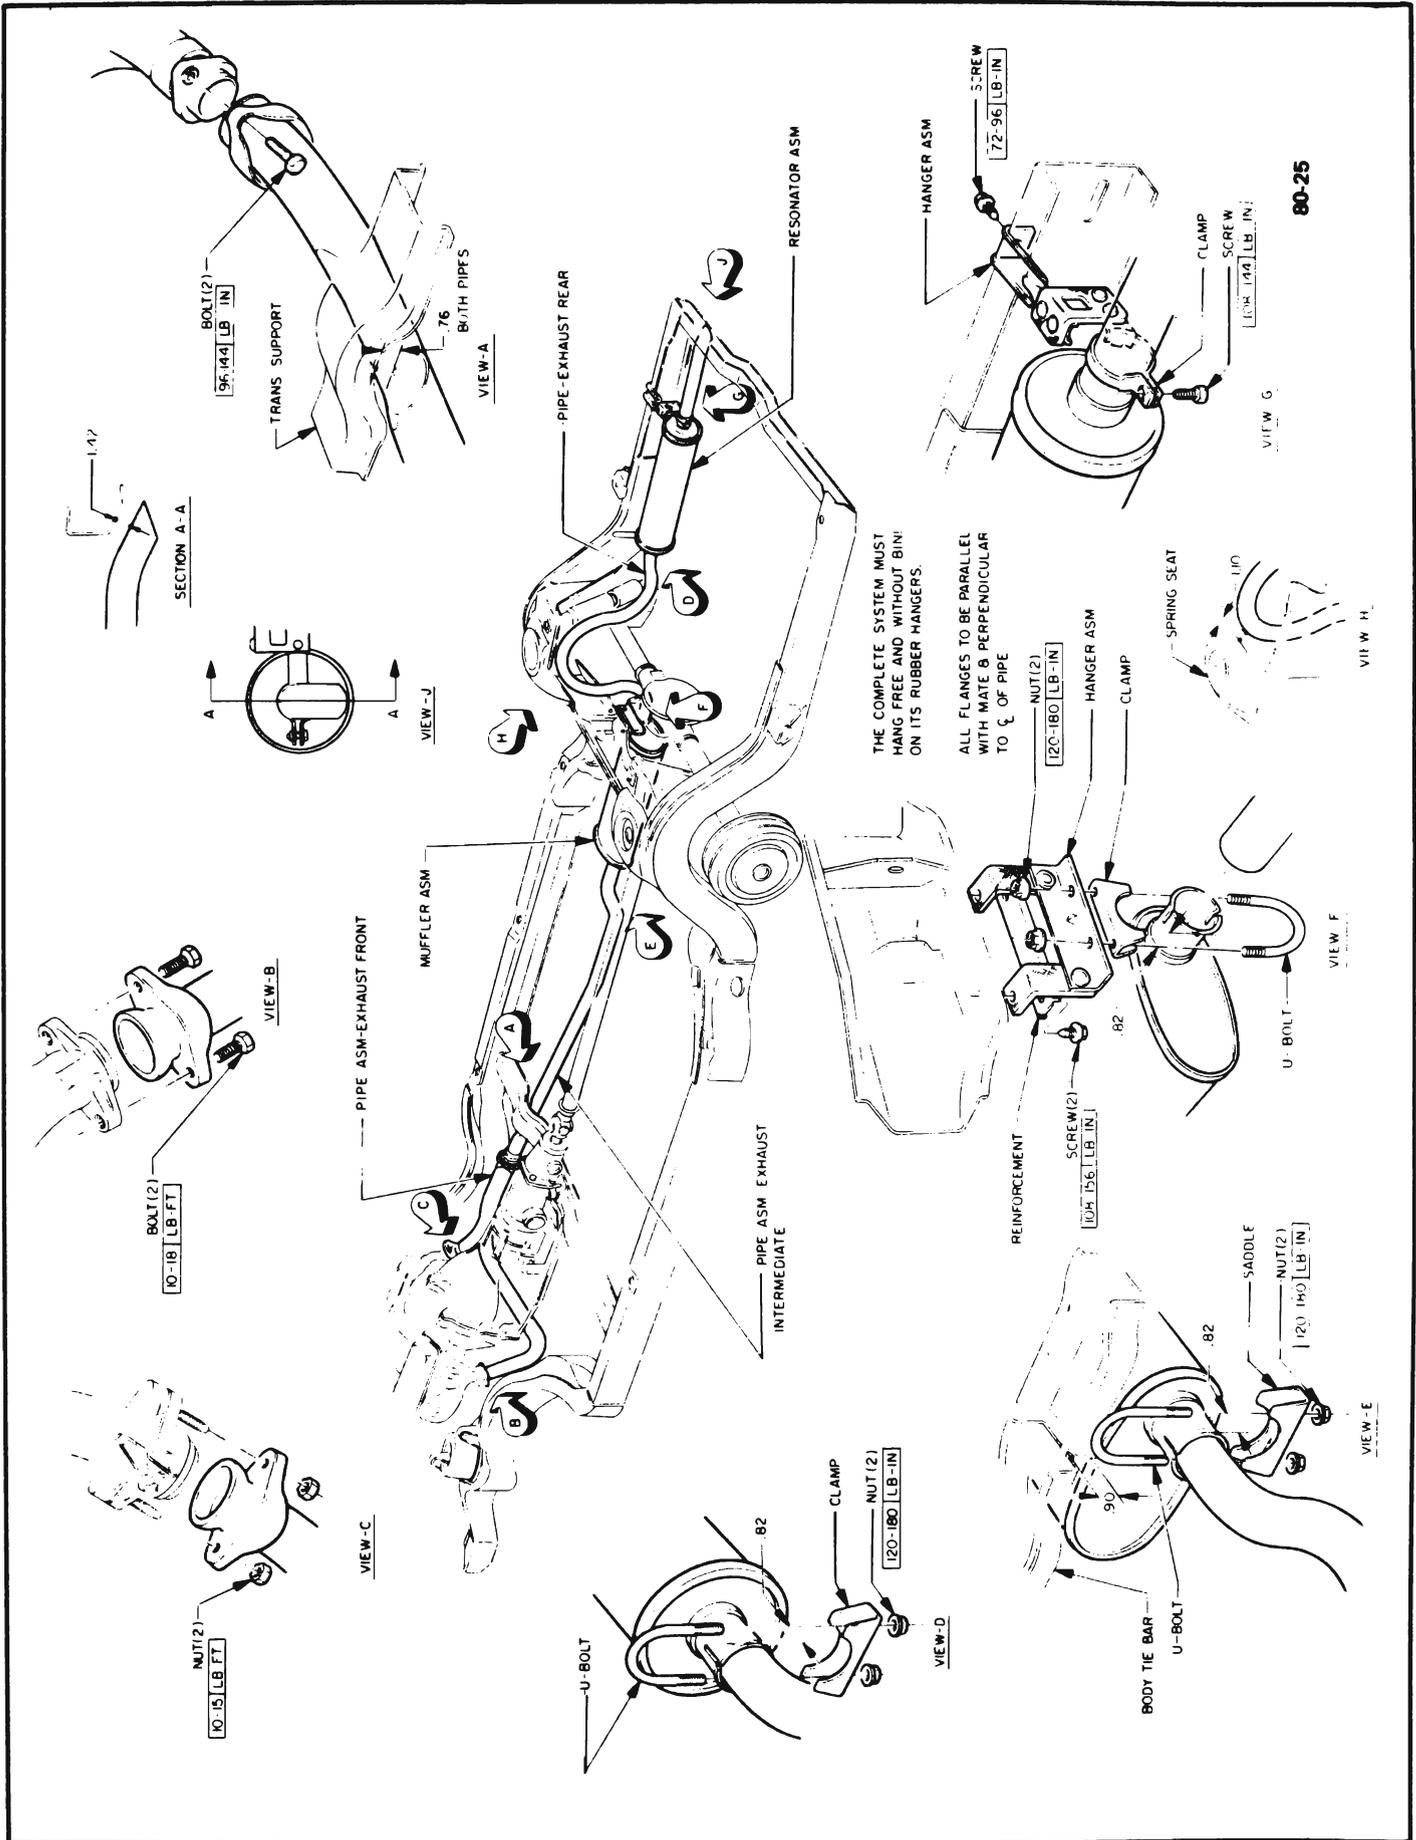


Figure 80-10 Exhaust System - LeSabre

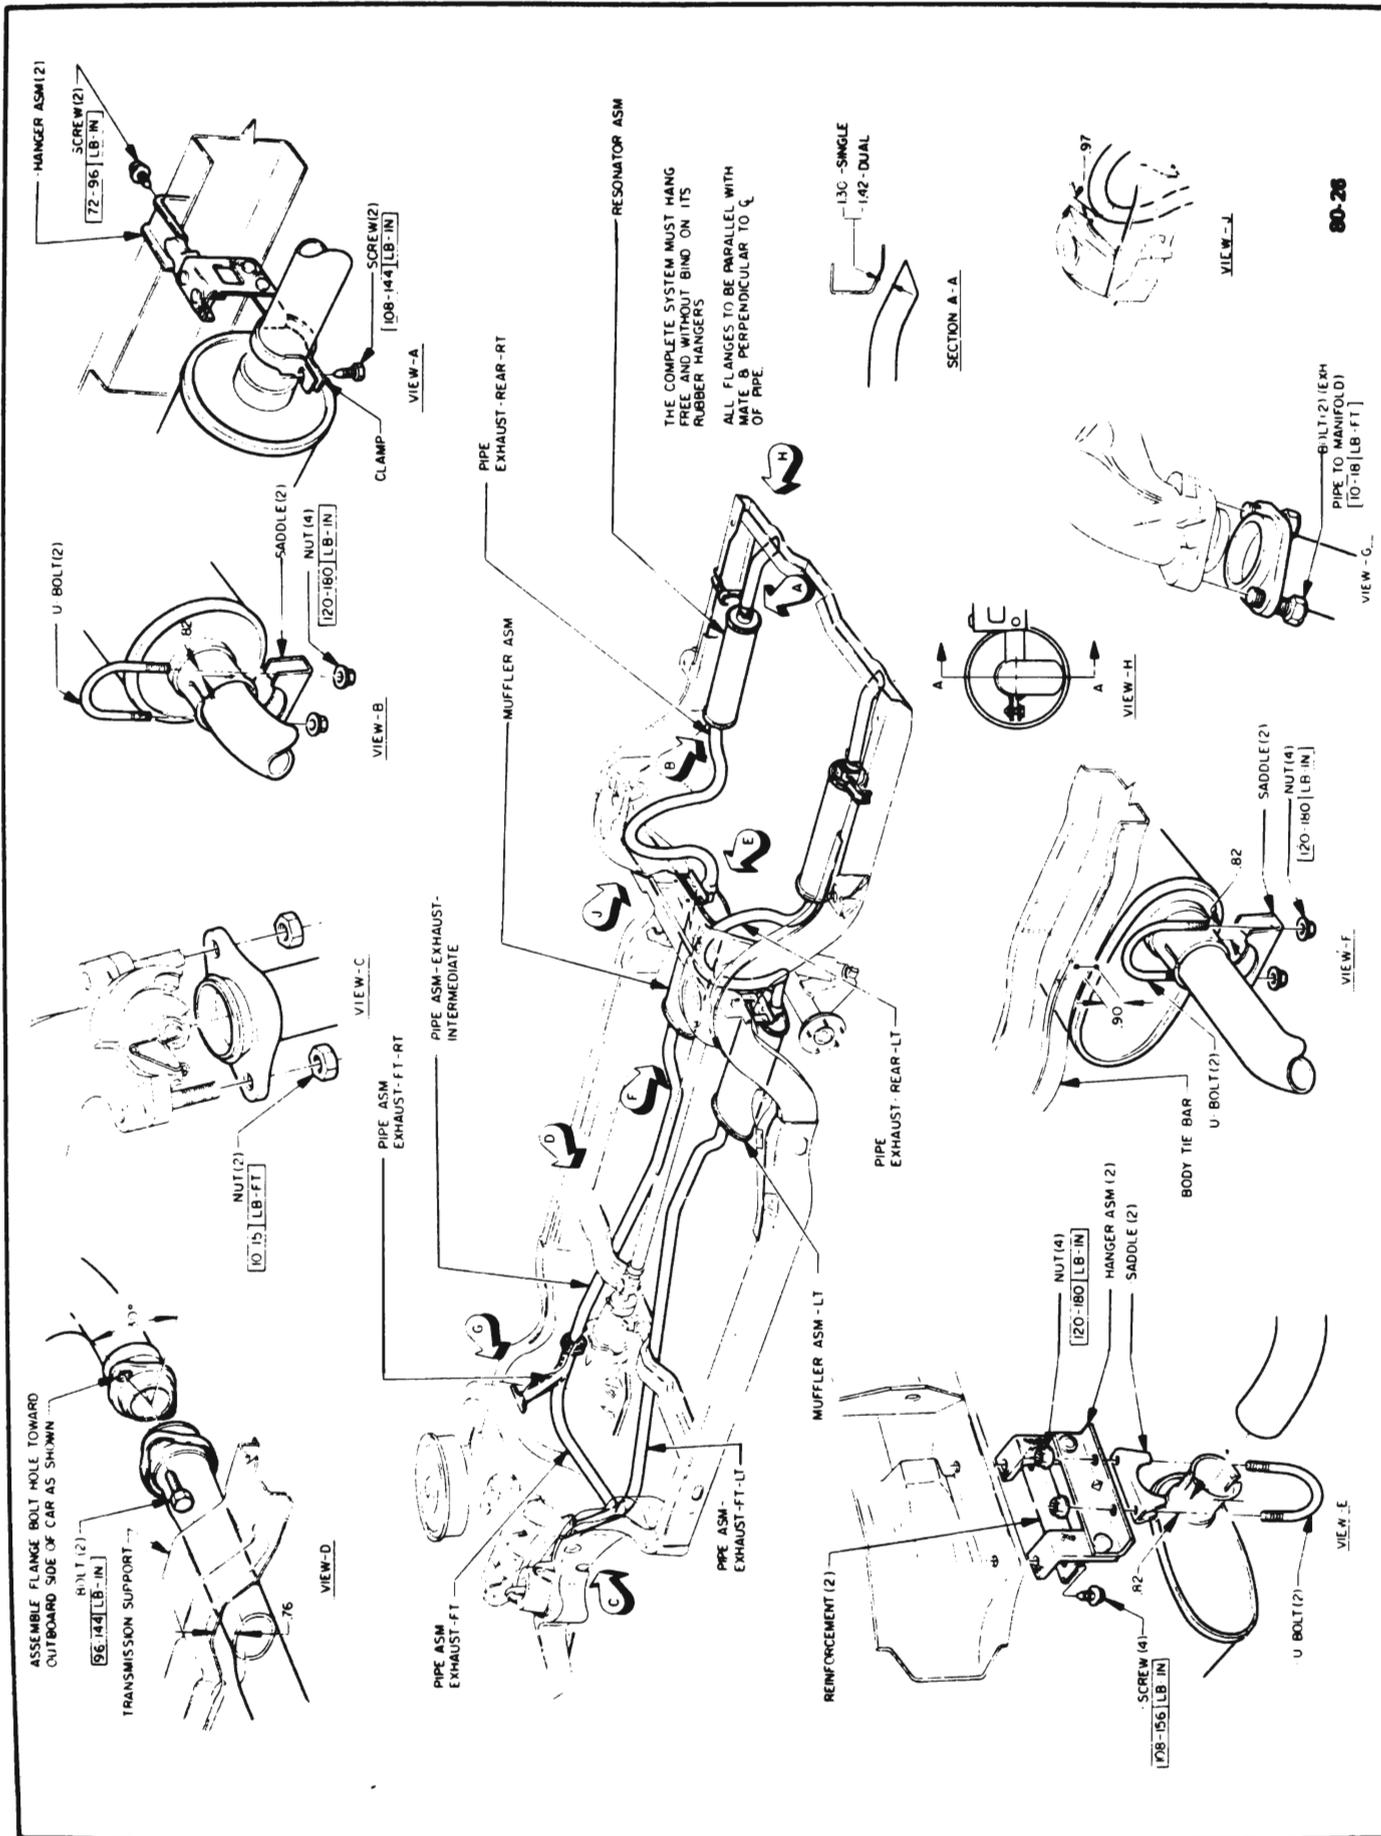


Figure 80-11 Single and Dual Exhaust Systems - Wildcat and Electra

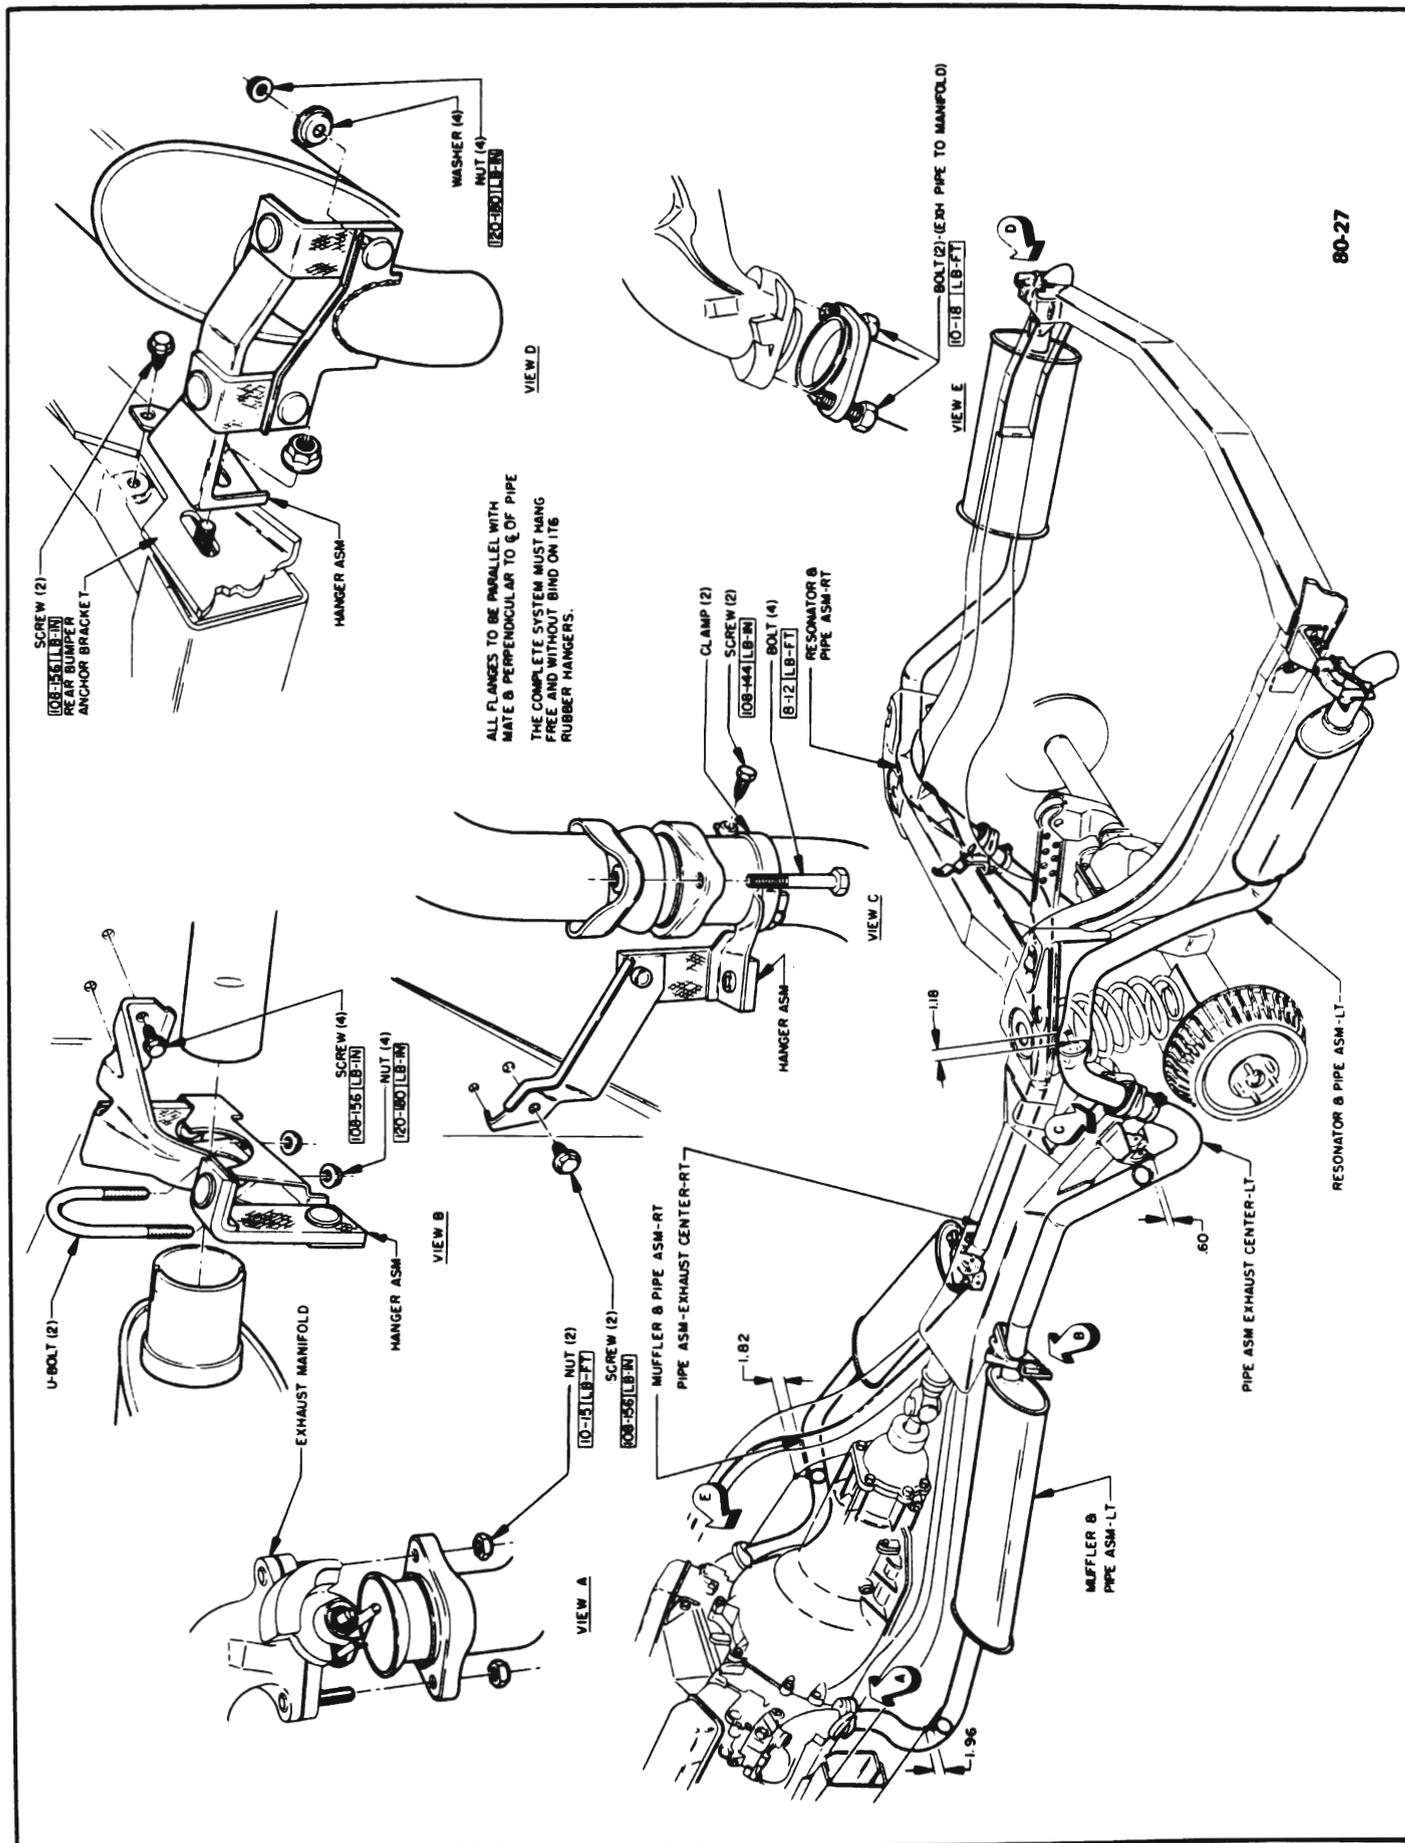


Figure 80-12 Exhaust System Riviera