

REAR BRAKES

CONTENTS

DESCRIPTION AND OPERATION:	
Description of Brake Mechanism	5D- 1
Operation of Brake Mechanism	5D- 1
DIAGNOSIS:	
Inspecting and Testing Brakes	5D- 1
Brake Trouble Diagnosis Chart	5D- 2
MAINTENANCE AND ADJUSTMENTS:	
Service Brake Adjustment.....	5D- 3
Parking Brake Adjustment	5D- 3
MAJOR REPAIR:	
Replace or Reline Brake Shoes.....	5D- 6
Repair Brake Lining	5D- 7
Wheel Cylinder Overhaul	5D- 3
Parking Brake Cable Replacement.....	5D- 4
Wheel Bolt Removal and Installation	5D- 4
Replacing Brake Pipes.....	5D- 4
Inspecting and Reconditioning Brake Drums	5D- 5
Rear Brake Hose Replacement.....	5D- 5
Filling, Bleeding and Flushing Brake System	5D-10
SPECIFICATIONS:	
Brake Specifications.....	5D-11

DESCRIPTION AND OPERATION

DESCRIPTION OF BRAKE MECHANISM

The brake mechanism includes a brake drum and a brake assembly at each wheel and two separate and independent systems for applying the brakes:

- (1) A mechanical parking brake system which operates the rear wheel brakes only.
- (2) A hydraulic service brake system which operates both front and rear wheels.

OPERATION OF A BRAKE MECHANISM

When the brake pedal is depressed, the master cylinder primary piston moves forward. Under normal conditions, the combination of hydraulic pressure and the force of the primary piston spring move the secondary piston forward at the same time. When the pistons have moved forward so that their primary cups cover the bypass holes, hydraulic pressure is transmitted to the front and rear wheels. Hydraulic pressure forces the wheel cylinder pistons outward, applying the brakes.

As pressure drops in the master cylinder, shoe springs retract all brake shoes and the connecting links push the wheel cylinder pistons inward, forcing fluid back to the master cylinder. See Figure 5D-15.

DIAGNOSIS

INSPECTION AND TESTING BRAKES

Testing Brakes

Brakes should be tested on dry, clean, reasonably smooth

and level roadway. A true test of brake performance cannot be made if roadway is wet, greasy or covered with loose dirt so that all tires do not grip the road equally. Testing will also be adversely affected if roadway is crowned so as to throw weight of car toward wheels on one side or if roadway is so rough that wheels tend to bounce.

Test brakes at different car speeds with both light and heavy pedal pressure; however, avoid locking the wheels and sliding the tires on roadway. Locked wheels and sliding tires do not indicate brake efficiency since heavily braked, but turning wheels will stop car in less distance than locked wheels. More tire-to-road friction is present with a heavily braked turning tire than with a sliding tire.

External Conditions that Affect Brake Performance

1. Tires. Tires having unequal contact and grip on road will cause unequal braking. Tires must be equally inflated and tread pattern of right and left tires must be approximately equal.
2. Car Loading. When car has unequal loading, the most heavily loaded wheels require more braking power than others. A heavily loaded car requires more braking effort.
3. Front Wheel Bearings. A loose front wheel bearing permits the drum to tilt and have spotty contact with the brake shoe linings causing erratic brake action.
4. Front End Alignment. Misalignment of the front end particularly in regard to limits on camber and theoretical king pin inclination will cause the brakes to pull to one side.

SYMPTOM	CAUSE														
	Excessive Brake Pedal Travel	Brake Pedal Gradually Increases	Excessive Brake Pedal Effort	Excessive Braking Action	Brakes Slow to Respond	Brakes Slow to Release	Brakes Drag	Uneven Braking Action (Side to Side)	Uneven Braking Action (Front to Rear)	Scraping Noise from Brakes	Brakes Squeak During Application	Brakes Squeak During Braking	Brakes Chatter During Stop	Brakes Groan at End of Stop (Roughness)	Brake Tell-Tale Glows During Stop
Leaking Brake Line or Connection			X	XX							X				XX
Leaking Wheel Cylinder or Piston Seal			X	XX		X				X					X
Leaking Master Cylinder			X	XX											X
Air In Brake System			XX								X				XX
Contaminated or Improper Brake Fluid							X	X	X						X
Leaking Vacuum System					XX		X								
Restricted Air Passage in Power Head					X		XX	X							
Damaged Power Head					X	X	X	X	X						
Improperly Assembled Power Head Valving					X	X	X	X	XX						
Worn Out Brake Lining - Replace					X	X				X	X	X	X	X	X
Uneven Brake Lining Wear - Replace and Correct	X				X					X	X	X	X	XX	X
Glazed Brake Lining - Sand Lightly					XX		X			X	X		X	X	
Incorrect Lining Material - Replace					X	X				X	X			X	X
Contaminated Brake Lining - Replace						XX				XX	XX	X	X	X	X
Linings Damaged by Abusive Use - Replace					X	XX				X	X	X	X	X	X
Excessive Brake Lining Dust - Remove with Air					X	XX				XX	XX		X	XX	X
Heat Spotted or Scored Brake Drums or Rotors						X				X	X		X	X	XX
Out-of-Round or Vibrating Brake Drums														X	XX
Out-of-Parallel Brake Rotors															XX
Excessive Rotor Run-Out															X
Faulty Automatic Adjusters	X									X	X	X			
Incorrect Wheel Cylinder Sizes					X	X				X	X				
Weak or Incorrect Brake Shoe Retention Springs						X		X	XX	X	X	XX	X	XX	
Brake Assembly Attachments - Missing or Loose	X									X	X	X	X	X	X
Insufficient Brake Shoe Guide Lubricant								X	X	X	X	XX	XX		
Restricted Brake Fluid Passage or Sticking Wheel Cylinder Piston			X	X		X	X	X	X	X	X				
Faulty Metering Valve (Disc Only)	X			X	X	X	X	X	X		X				
Brake Pedal Linkage Interference or Binding				X		X	XX	XX							
Improperly Adjusted Parking Brake									X						
Drums Tapered or Threaded												XX			
Incorrect Front End Alignment										XX					
Incorrect Tire Pressure										X	X				
Incorrect Wheel Bearing Adjustment	X											X		X	
Loose Front Suspension Attachments										X		XX		X	X
Out-of-Balance Wheel Assemblies														XX	
Operator Riding Brake Pedal	X	X	X						X		X				X
Improperly Adjusted Master Cylinder Push Rod	X							X	XX						X
Sticking Wheel Cylinder or Caliper Pistons					X		X	X	X	X	X				
Faulty Proportioning Valve					X		X	X	X						

XX - Indicates more probable cause(s)

X - Indicates causes

5B5D1

Figure 5D-1 Brake Trouble Diagnosis Chart

SERVICE BRAKE ADJUSTMENT

Preliminary Checks

1. At reasonable frequent intervals, the brakes should be inspected for pedal travel, which is the distance the pedal moves toward the floor from a fully-released position. Inspection should be made with the brake pedal firmly depressed (approximately 50 lbs. on Manual drum or 100 lbs. on power drum or power disc) while the brakes are cold.

"X" Car Manual Drum	3"
"A" Car Manual Disc	5-7/8"
"H" and "X" Car Power Drum or Disc.....	1-3/4"
"A"- "B"- "C"- "E" Car Power Disc	2-1/4"

On power brake-equipped cars, pump the pedal a minimum of 3 times with the engine off before making pedal travel checks. This exhausts all vacuum from the power booster.

Stop Light Switch Adjustment-A-B-C-E Cars

With pedal in fully released position, the stop light switch plunger should be fully depressed against the pedal shank. Adjust switch by moving in or out as necessary.

H and X Cars

The stop light switch is mounted on a flange protruding from the brake pedal support.

1. Release the brake pedal to its normal position.
2. Adjust switch by turning in or out as necessary.

Electrical contact should be made when the brake pedal is depressed 3/8" - 5/8" from its fully released position.

Adjustment at Rear Wheels-All Series Except H

1. Using a punch, knock out lanced area in brake backing plate. If this is done with the drum installed on the car, the drum must be removed and all metal cleaned out of the brake compartment. Be sure to procure a new hole cover and install it in the backing plate after adjustment to prevent dirt and water from getting into the brakes. Use J-6166 to turn brake adjusting screw; expand brake shoes at each wheel until the wheel can just be turned by hand. The drag should be equal at all wheels.

2. Back off brake adjusting screw at each wheel 30 notches. If shoes still drag lightly on drum, back off adjusting screw one or two additional notches. Brakes should be free of drag when screw has been backed off approximately 12 notches. Heavy drag at this point indicates tight parking brake cables.

3. Install adjusting hole cover in brake backing plate.
4. Check parking brake adjustment.

Parking Brake Adjustment-All Series Except H

Adjustment of parking brake cable is necessary whenever the rear brake cables have been disconnected. Need for parking brake adjustment is indicated if the hydraulic brake system operates with good reserve, but the parking brake pedal travel is less than 9 ratchet clicks or more than 16 ratchet clicks under heavy foot pressures - all series.

1. Depress parking brake pedal exactly two ratchet clicks on the X Car, three ratchet clicks on the A-B-C-E Cars and six ratchet clicks on the Estate Wagon.

2. Tighten adjusting nut until the left rear wheel can just be turned rearward using two hands but is locked when forward rotation is attempted.

3. With mechanism totally disengaged, rear wheels should turn freely in either direction with no brake drag.

It is very important that parking brake cables are not adjusted too tightly to cause brake drag.

Parking Brake Adjustment-H Series

1. Raise vehicle on hoist.
2. Apply parking brake 1 notch from fully released position.
3. Loosen equalizer check nut and tighten the adjusting nut until a light drag is felt when the rear wheels are rotated.
4. Tighten the check nut securely.
5. Fully release parking brake and rotate the rear wheels. No drag should be present.
6. Lower vehicle to floor.

Parking Brake Switch Adjustment-H Series

With the ignition switch "On", the brake warning light should not light with the parking brake lever fully released but should light with the lever applied in the first notch (click).

1. Check that the brake warning light (on the dash) does not light with the parking brake lever fully released (ignition "On").
2. Apply the parking brake lever (1) notch; the brake light should come on.
3. If the light remained on in Step 1 or did not come on in Step 2, lift up on the rear of the lever cover.
4. Adjust the switch, as necessary, by bending the tab on the driver side of the lever assembly. Recheck switch operation.

Avoid excessive bending of the tab. Check the tab for cracks; if cracking is evident, the lever assembly must be replaced.

MAJOR REPAIR

WHEEL CYLINDER OVERHAUL

Removal of Brake Wheel Cylinder

1. Remove wheel, drum and brake shoes. Be careful not to get grease or dirt on brake lining.
2. Remove wheel cylinder from backing plate.

Disassembly of Brake Wheel Cylinder

1. Inspect cylinder bore for scoring or corrosion. It is best to replace a corroded cylinder.
2. Polish any discolored or stained area with crocus cloth by revolving cylinder on cloth supported by a finger.

3. Rinse cylinder in clean brake fluid.
4. Shake excessive rinsing fluid from cylinder. Do not use a rag to dry cylinder, as lint from the rag cannot be kept from cylinder bore surfaces.

Assembly of Brake Wheel Cylinder

1. Lubricate cylinder bore and counterbore with clean brake fluid and insert spring-expander assembly.
2. Install new cups. (Be sure cups are lint and dirt free). Do not lubricate cups prior to assembly.
3. Install new Durex pistons.
4. Press new boots into cylinder counterbores by hand. Do not lubricate boots prior to assembly.

Installation of Brake Wheel Cylinder

1. Install wheel cylinder on brake backing plate and connect brake pipe or hose. Torque rear wheel brake pipe to wheel cylinder to 100 lb.in.
2. Install brake shoes, drum and wheel; then flush and bleed hydraulic system.

PARKING BRAKE CABLE REPLACEMENT

Front Parking Brake Cable Replacement

1. Raise car.
2. Remove adjusting nut from equalizer. 3. Remove retainer clip from rear portion of front cable at frame and from lever arm.
4. Disconnect front brake cable from parking brake pedal or lever assembly. Remove front brake cable. On some models it may assist installation of new cable if a heavy cord is tied to either end of cable in order to guide new cable through proper routing.
5. Install cable by reversing removal procedure.
6. Adjust parking brake.

Center Parking Brake Cable Replacement

1. Raise car.
2. Remove adjusting nut from equalizer.
3. Unhook connector at each end and disengage hooks and guides.
4. Install new cable by reversing removal procedure.
5. Adjust parking brake.
6. Apply parking brake 3 times with heavy pressure and repeat adjustment.

Rear Parking Brake Cable Replacement

1. Raise car.
2. Remove rear wheel and brake drum.
3. Loosen adjusting nut at equalizer.
4. Disengage rear cable at connector.
5. Remove two bolts attaching cable assembly to backing

plate on Estate Wagons. Bend retainer fingers on all series except Estate Wagons.

6. Disengage cable at brake shoe operating lever.
7. Install new cable by reversing removal procedure.
8. Adjust parking brake.

WHEEL BOLT REMOVAL AND INSTALLATION

Drum Brakes

1. Remove hub and drum assembly from car.
2. Secure hub and drum assembly in a vise *and mark* center of the bolt head with a center punch. Drill 1/8" pilot hole in head of bolt; redrill head using a 9/16" bit. Cut off any remaining portion of bolthead using a chisel and then drive out bolt with drift. See Figure 5D-2.

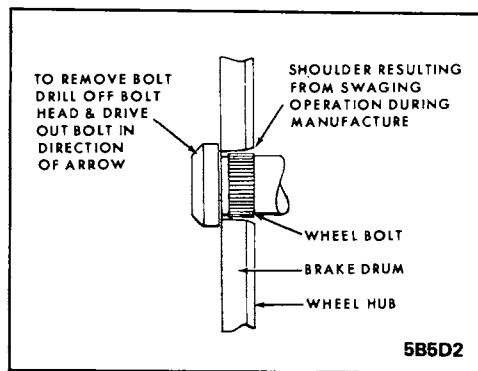


Figure 5D-2 Bolt Pressed Into Place

3. Press new wheel bolt into place in drum and reinstall assembly onto car.
4. Refer to Group 3 for correct wheel bearing adjustment.

REPLACING BRAKE PIPES

WARNING: NEVER USE COPPER TUBING BECAUSE COPPER IS SUBJECT TO FATIGUE CRACKING AND CORROSION WHICH COULD RESULT IN BRAKE FAILURE.

1. Procure the recommended tubing and steel fitting nuts of the correct size. (Outside diameter of tubing is used to specify size.)
2. Cut tubing to length. Correct length may be determined by measuring old pipe using a cord and adding 1/8" for each double flare.
3. Double flare tubing ends using a suitable flaring tool such as Kent-Moore J-23530. Follow instructions included in tool set.

Make sure fittings are installed before starting second flare.

WARNING: DOUBLE FLARING TOOL MUST BE USED AS SINGLE FLARING TOOLS CANNOT PRODUCE A FLARE STRONG ENOUGH TO HOLD THE NECESSARY PRESSURE.

4. Bend pipe assembly to match old pipe using a tubing bender. Clearance of .750 must be maintained to all moving or vibrating parts.

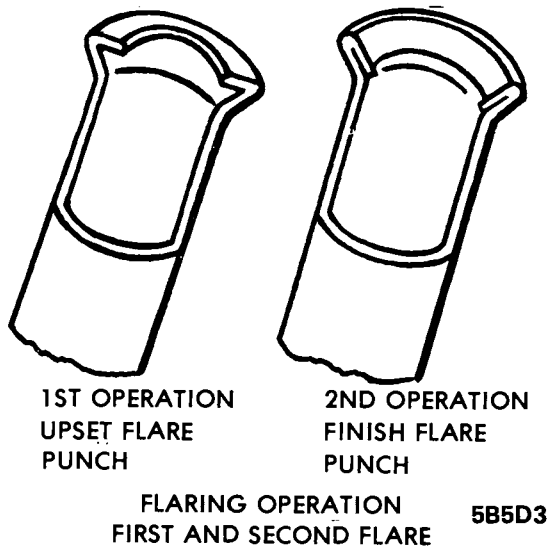


Figure 5D-3

REAR BRAKE HOSE REPLACEMENT Removal

1. Remove all three brake pipes from hose, two at junction block and one on the female fitting at bracket. Be careful not to bend bracket or pipes, use penetrating oil if necessary.
2. Remove "U" clip and take female fitting out of bracket.
3. Observe position at which junction block is mounted to the axle. When installing new hose be sure this junction block is in the same position.
4. Remove bolt attaching junction block to axle.

Installation

1. Thread both rear axle pipes into junction block.
2. Bolt junction block to axle and then torque rear pipes into block.
3. Pass female end of hose through frame bracket. Female fitting will fit bracket in only 1 position, without twisting hose position female end in bracket.
4. Install "U" clip.
5. Attach pipe to female fitting, torque to specification, again be careful not to bend bracket or pipe. Check to see that hose installation did not loosen frame bracket. Retorque bracket if necessary.
6. Bleed system as outlined.

INSPECTING AND RECONDITIONING BRAKE DRUMS

Whenever brake drums are removed, they should be thoroughly cleaned and inspected for cracks, scores, deep grooves and out-of-round.

Cracked, Scored, or Grooved Drum

A cracked drum is unsafe for further service and must be replaced. Do not attempt to weld a cracked drum.

Smooth up any slight scores by polishing with fine emery cloth. Heavy or extensive scoring will cause excessive brake lining wear, and it will probably be necessary to rebore in order to true up the braking surface.

If the brake linings are slightly worn and the drum is grooved, the drum should be polished with fine emery cloth but should not be turned. At this stage, eliminating all grooves in drum and smoothing the ridges on lining would necessitate removal of too much metal and lining, while if left alone, the grooves and ridges match and satisfactory service can be obtained.

If brake linings are to be replaced, a grooved drum should be turned for use with oversize linings. A grooved drum, if used with new lining, will not only wear the lining, but will make it difficult, if not impossible to obtain efficient brake performance.

Out-Of-Round or Tapered Drum

An out-of-round drum makes accurate brake shoe adjustment impossible and is likely to cause excessive wear of other parts of brake mechanism due to its eccentric action. An out-of-round drum can also cause severe and irregular tire tread wear as well as a pulsating brake pedal. When the braking surface of a brake drum exceeds the factory specification limits in taper (and/or) being out-of-round, the drum should be turned to true up the braking surface. Out-of-round as well as taper and wear can be accurately measured with an inside micrometer fitted with proper extension rods.

When measuring a drum for out-of-round, taper and wear, take measurements at the open and closed edges of machined surface and at right angles to each other.

Turning Brake Drums

If a drum is to be turned, only enough metal should be removed to obtain a true, smooth braking surface. If a drum does not clean-up when turned to a maximum diameter as shown in the general specification, it must be replaced. Removal of more metal will affect dissipation of heat and may cause distortion of the drum.

All brake drums have a maximum diameter cast into them. This diameter is the maximum wear diameter and not a refinish diameter. Do not refinish a brake drum that will not meet the specifications, as shown below, after refinishing.

ORIGINAL DIAMETER

H Car	9.000
X and A- Car	9.500
B-C-E-Car	11.000
Estate Wagon	12.000

MAXIMUM REBORE DIAMETER

H Car	9.060
X and A-Car	9.560
B-C-E-Car	11.060
Estate Wagon	12.060

DISCARD DIAMETER

H Car	9.090
X and A-Car	9.590
B-C-E-Car	11.090
Estate Wagon	12.090

Brake Drum Balance

During manufacture, brake drums are balanced within three ounce inches. These weights must not be removed.

After drums are turned, or if difficulty is experienced in maintaining proper wheel balance, it is recommended that brake drums be checked for balance. Brake drums may be checked for balance on most off-the-car balancers.

**REPLACE OR RELINE BRAKE SHOES—
X, A, B, C AND E****Removal and Inspecting**

1. Jack up car and remove wheel and brake drum (rear). It may be necessary to back off the brake shoe adjustment before the brake drums can be removed. To back off shoe adjustment, rotate shoe adjusting screw upward.
2. Unhook the primary and secondary shoe return springs using large pliers.
3. Remove shoe hold down springs.
4. Lift up on actuator, unhook actuating link from anchor pin, then remove.
5. Spread shoes to clear wheel cylinder connecting links, remove parking brake strut and spring, disconnect cable from parking brake lever, remove shoes from the backing plate.
6. Separate the brake shoes by removing adjusting- screw and lock spring. Remove parking brake lever and secondary brake shoe.
7. Clean all dirt out of brake drum, using care to avoid getting dirt into front wheel bearings. Inspect drums and replace or recondition if required.
8. Clean all dirt from brake assemblies and inspect for any unusual condition.
9. Wheel cylinders having torn, cut, or heat-cracked boots should be completely overhauled.

Inspection for leakage may be accomplished at the boot center hole after removal of link pin. Fluid coatings on piston within cylinder and on end of link pin removed from boot are normal, as cylinder contains a porous DUREX PISTON WHICH IS IMPREGNATED WITH A CORROSION INHIBITING FLUID. Fluid spilling from boot center hole, after link pin is removed, indicates

cup leakage and necessity for completely over-hauling cylinder.

10. If working at rear wheels, inspect backing plate for oil leak past wheel bearing oil seals. Correct any leak by installation of new seals (Group 4).

11. Check all backing plate attaching bolts to make sure they are tight. Using fine emery cloth, clean all rust and dirt from shoe contact surfaces on plate.

Relining Brake Shoes

If old brake shoes are to be relined, inspect shoes for distortion and for looseness between the rim and web; these are causes for discarding any shoe. If shoes are serviceable, be governed by the following points in installing new linings:

1. Remove old linings by drilling out rivets. Punching rivets out will distort shoe rim. Thoroughly clean surface of shoe rim and file off any burrs or high spots.
 2. Use Buick brake lining or equivalent and the rivets included in lining package which are of the correct size. The rivets must fit the holes with the solid body of rivet extending through the shoe rim, but no farther.
- Keep hands clean while handling brake lining.
3. Start riveting at center of shoe and lining and work toward the ends. Use a roll set for riveting; a star set might split the tubular end and then the rivet would not fill the hole. The primary lining is shorter than secondary lining; therefore, the rivet holes at each end of the shoe rim are not used.
 4. After riveting is completed, lining must seat snugly against shoe with no more than .005" separation midway between rivets. Check with a .004" (go) and a .006" (No Go) feeler gage.

Installation and Adjustment

1. On rear brakes only, lubricate fulcrum end of parking brake lever with Delco Brake Lubricant or equivalent, then attach lever to secondary shoe. Make sure that lever is free moving.
2. Connect brake shoes together with adjusting screw spring, then place adjusting screw in position. When installing the adjusting screw spring and adjusting screw, make sure the spring does not touch the starwheel portion of the adjusting screw; and, also, when installing adjusting screw, make sure right hand thread adjusting screw is on left side of car and left hand thread adjusting screw is on right side of car. Make certain starwheel lines up with adjusting hole in backing plate.
3. Lubricate shoe contact surfaces on backing plate with a thin coating of Delco Brake Lubricant or equivalent. On rear brakes, sparingly apply same lubricant where brake cable contacts backing plate.
4. Place brake shoes on backing plate, at the same time engaging shoes with wheel cylinder links. The primary shoe (short lining) goes toward front of car. On rear brakes, connect cable to parking brake lever and install strut and spring between lever and primary shoe.
5. Install acuator, actuator return spring and actuating link. If old brake shoe return springs are nicked, distorted

or of doubtful strength (discolored from heat), it is advisable to install new parts.

6. Install shoe hold down springs.
7. Install the primary and secondary shoe return springs using large pliers. Be careful not to distort springs.
8. Measure brake drum I.D. using inside caliper portion of Tool J-21177. Adjust brake shoes to dimension obtained on outside caliper portion of Tool J-21177.
9. Lubricate and adjust front wheel bearings. Install brake drums and wheels.
10. If any hydraulic connections were disturbed, bleed hydraulic system.
11. Adjust parking brake.
12. Inspect all brake pipes, hoses and connections for evidence of fluid leakage. Tighten any leaking connection. Then apply heavy pedal pressure to brake pedal and re-check connections.
13. Check fluid level in master cylinder and add fluid if necessary.
14. Check brake pedal for proper feel and for proper return.
15. Remove jacks and road test car for proper brake action. Brakes must not be severely applied immediately after installation of new brake shoes or linings. Severe application may permanently damage new linings and may score brake drums. When linings are new, they must be given moderate use for several hundred miles of burnishing.

Repair Brake Lining

This procedure is to be used when brake action is unequal, severe, hard, noisy or otherwise unsatisfactory and when brake linings have had little wear.

1. Check fluid in master cylinder and add fluid if necessary.
2. Check brake pedal for proper feel and for proper return.
3. Jack up car in a safe manner and remove all wheels.
4. Remove all brake drums. Brake pedal must not be operated while drums are removed.
5. Clean all dirt out of brake drums, using care to avoid getting dirt into front wheel bearings. Inspect drums and replace or recondition if required.
6. Clean all dirt from brake assemblies, then inspect brake linings for uneven wear, oil soaking, loose rivets or imbedded foreign particles. If linings are oil soaked, replacement is required.
7. If linings are otherwise serviceable, tighten or replace loose rivets and thoroughly clean all steel or other imbedded particles from surfaces and rivet counterbores of linings.
8. If brake linings at any wheel show a spotty wear pattern indicating uneven contact with brake drum, it is advisable to true up the linings with a light grinding cut, if suitable grinding equipment is available. If brake action is unequal, severe or hard, indicating that brake shoes are not centralized in drums, the grinder may also be used to correct this condition.

9. Check all backing plate bolts to make sure they are tight.

10. Measure brake drum I.D. using inside caliper portion of Tool J-21177. Adjust brake shoes to dimension obtained, on outside caliper portion of Tool J-21177. See Figures 5D-4 and 5D-5.


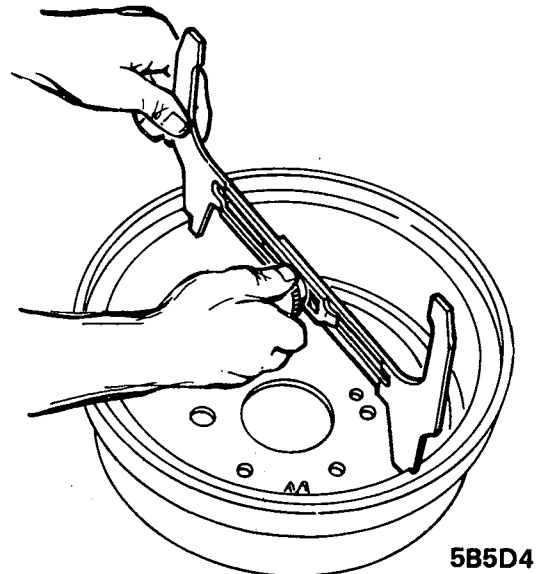


Figure 5D-4 Measuring Brake Drum I.D.

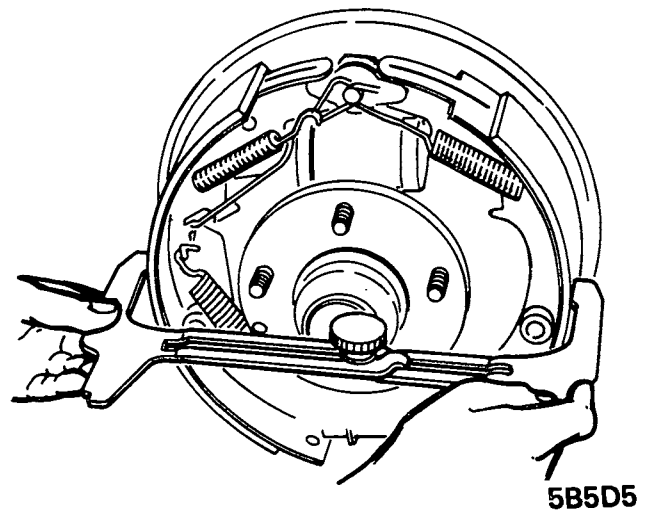

Figures 5D-5 Adjusting Brake Shoes

11. Install drum and wheel and tire assemblies.
12. Remove jacks and road test car for proper brake action. Brakes must not be severely applied immediately after installation of reground brake shoes or linings. Severe application may permanently damage new linings and may score brake drums. When linings are new, they must be given moderate use for several hundred miles of burnishing.

SERVICING REAR BRAKES - H SERIES

Removal

1. Raise the car and remove the wheel and tire assembly.
2. Remove the brake drum.

If the brake drum cannot be removed due to wear, it will be necessary to release the brake adjuster assembly. To gain access to the adjuster, knock out the lanced area in the web of the brake drum using a chisel or similar tool. See Figure 5D-6.



5B5D6

Figure 5D-6 - Releasing Self Adjuster

Release the rod assembly from the rear shoe by pushing in on the rod until it is clear of the shoe. The pull back spring will then pull the shoes toward each other and the drum may be removed.


CAUTION: After knocking out the lanced area of the drum, be sure to remove the piece of metal from inside the drum area as well as any small pieces of metal that might have fallen from the web. A new rubber hole cover must be installed when the drum is reinstalled.

If the drum already incorporated a rubber hole cover, remove and discard the old cover; install a new hole cover at reassembly. Be sure to remove any foreign material that may have fallen inside the drum as a result of cover or knockout removal.

3. Completely release all tension from the parking brake equalizer.
4. Remove the parking brake cable from the parking brake lever.

Do not allow the lever to swing forward as the movement would "adjust" the brakes.

5. Using pliers, remove the pull back spring. See Figure 5D-7.
6. Pull the front and rear shoes from under the hold

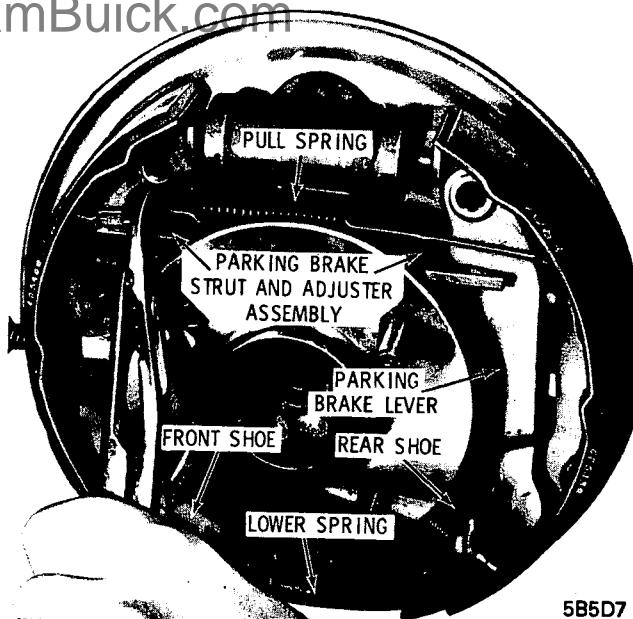

5B5D7

Figure 5D-7 - Removing Shoe Pullback Spring

down clips and remove the brakes with the strut and adjuster assembly attached.

7. Separate the shoes and remove the strut and adjuster assembly from the rear shoe.


CAUTION: Mark shoe position if shoes are to be reused.

8. Remove the parking brake lever.

Do not remove the hold down clips unless they are broken or show signs of wear.

Adjuster Disassembly

1. With adjuster assembly removed from the brake assembly, position Tool J-23730 so that the tang of the tool rests on the flat portion of the locks (between the lock tangs). Press down on the adjuster locks. See Figure 5D-8.

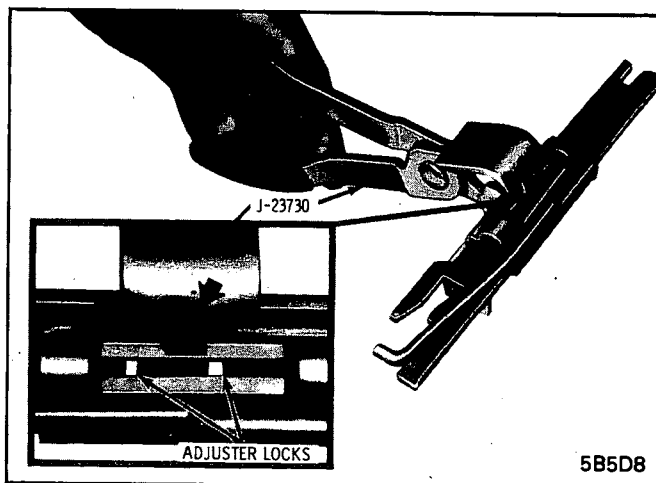

5B5D8

Figure 5D-8 - Releasing Adjuster Locks (Tool J-23730)

2. Work the rod assembly free of the adjuster locks.
3. When both adjuster tangs are clear of the rod assembly: slide the rod off the lever.

1. Sub-assemble the rod assembly to the strut. Be sure that the index hole is lined up and seated. See Figure 5D-9.

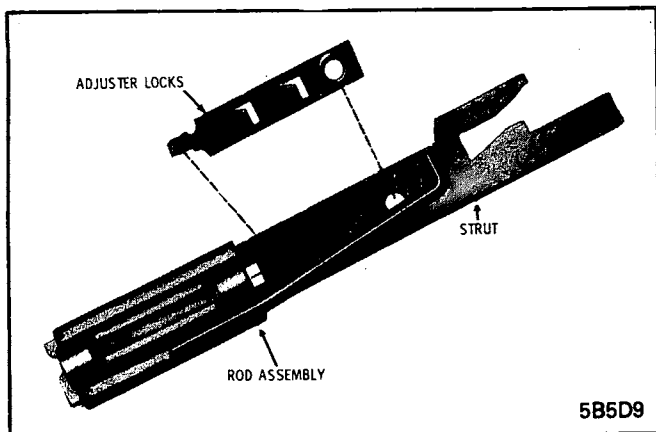


Figure 5D-9 - Adjuster Lock Positioning

2. Slide the rod assembly over the adjuster locks until both locks are positioned. Note that the adjuster lock index hole is about 1/2 covered by the rod assembly. See Figures 5D-10 & 5D-11.

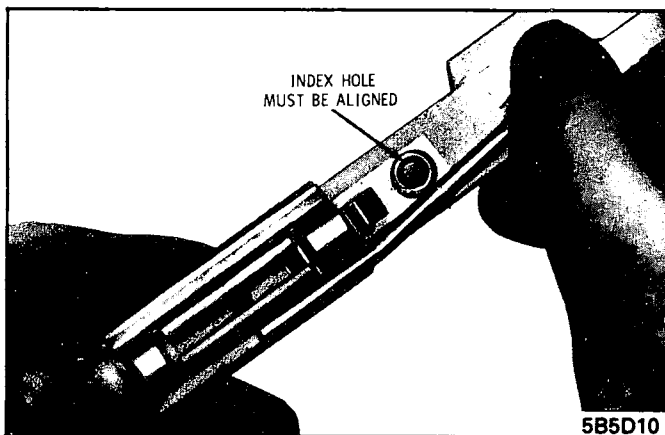


Figure 5D-10 - Installing Rod Assembly

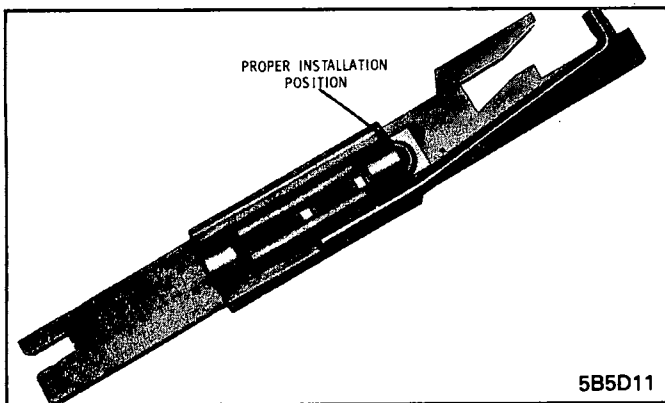


Figure 5D-11 - Properly Positioned Rod Assembly

Installation

CAUTION: Lubricate the brake backing plate

contact surfaces as shown in Figure 5D-12 using lubricant 1050110 or equivalent. Keep hands clean while handling brake shoes. Do not allow oil or grease to come in contact with linings.

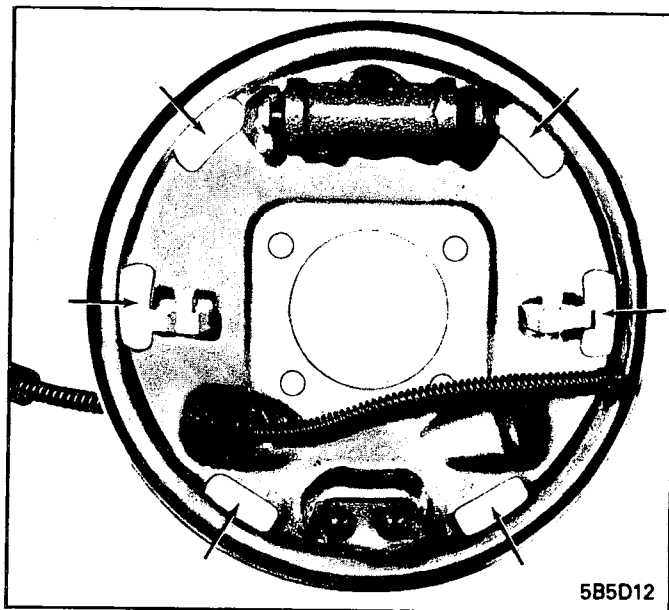


Figure 5D-12 - Backing Plate Contacts

1. Install the parking brake lever to the rear shoe and install the parking brake strut and adjuster assembly to the rear shoe.

The rear shoe differs from the front shoe in the web area. The rear shoe will have a hole to accept the parking brake lever and an oblong hole to accept the adjuster.

CAUTION: *If original shoes are being reused, they must be installed in original positions (as marked at removal).*

2. Connect the front and rear shoe together with the lower spring.

3. Install both shoes on the flange plate with the lower spring under the shoe anchor. Guide the lever and adjuster assembly into position. Be sure the hold down clips are in position. (The clips must be on the axle flange side of the shoe web).

4. Engage the front and rear shoes with the wheel cylinder links.

5. Engage the parking brake strut assembly to the front shoe.

6. Position the pull back spring in the rear shoe and engage the spring in the front shoe by pulling it into position with pliers. See Figure 5D-13.

The pull back spring must be installed so as to be in a position that is over the parking brake lever and engaging the rear shoe.

7. Connect the parking brake cable to the parking brake lever. Be careful not to move the adjuster locks from their "installation" position.

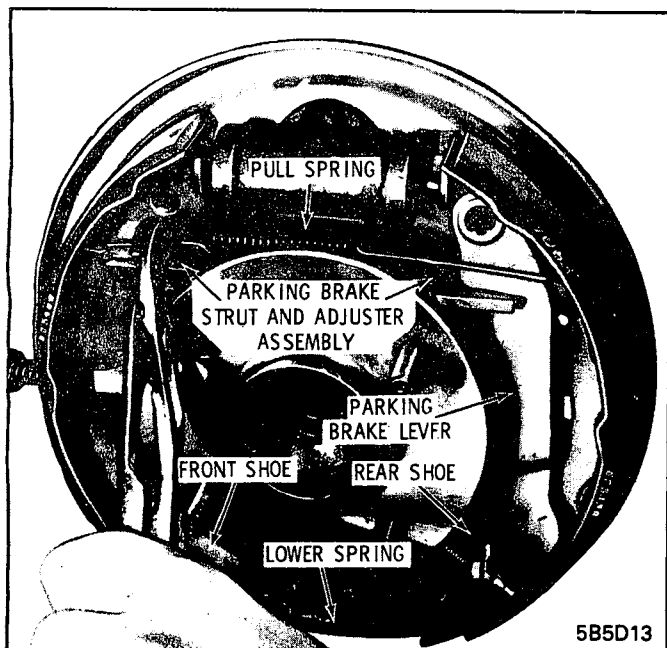


Figure 5D-13 - Installing Shoe Pullback Spring

8. Install brake drums, wheels and tires and adjust parking brake equalizer.

9. Set and release the parking brake handle two or three times to adjust the service brakes.

10. After service brakes are adjusted, adjust parking brake equalizer.

BLEEDING AND FLUSHING BRAKE SYSTEM

Bleeding Brake Hydraulic System

A bleeding operation is necessary to remove air whenever it is introduced into the hydraulic brake system.

It may be necessary to bleed the hydraulic system at all four wheel cylinders if air has been introduced through low fluid level or by disconnecting brake pipes at master cylinder. If brake pipe is disconnected at any wheel cylinder, then that wheel cylinder only need be bled. If pipes are disconnected at any fitting located between master cylinder and wheel cylinders, then all wheel cylinders served by the disconnected pipe must be bled.

MANUAL BLEED

If the car is equipped with power brakes, deplete the vacuum reserve by applying the brakes several times.

1. Fill master cylinder with brake fluid and keep at least one-half full of fluid during bleeding operation.

Bleed master cylinder first. After bleeding master cylinder, bleed right rear brake, left rear brake, right front brake and left front brake.

2. With the proper size Box End wrench or tool J-21472 over bleeder valve, attach bleeder tube to valve and allow tube to hang submerged in brake fluid in a clean glass jar. See Figure 5D-14.

3. Open the bleeder valve and fully depress the brake pedal.

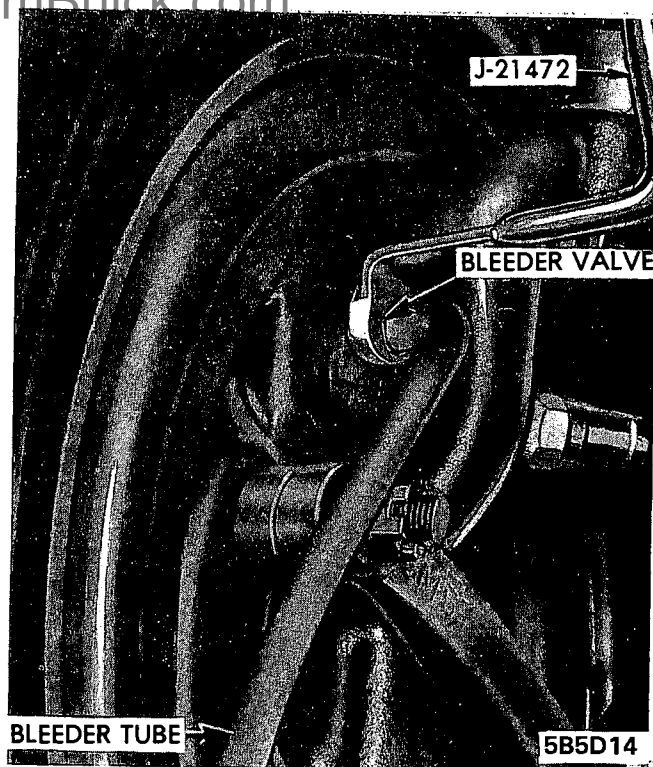


Figure 5D-14 Bleeding Wheel Cylinder

4. Close bleeder valve and release brake pedal.

5. Repeat steps 3 and 4 until all air is evacuated.

Check and refill master cylinder reservoir as required to prevent air from being drawn through master cylinder.

6. Repeat the bleeding procedure at all wheels if the entire system is to be bled.

7. Check the brake pedal, feel for "sponginess" and repeat entire bleeding procedure if necessary.

PRESSURE BLEED

1. Charge bleed ball to between 35 and 45 psi or use maximum pressure the bleed ball will take without leaking.

Bleed master cylinder first. After bleeding master cylinder, bleed both rear brakes simultaneously and then both front brakes simultaneously.

2. With the proper size box-end wrench or tool J-21473 over bleeder valves, attach bleeder tubes to bleeder valves and allow tubes to hang submerged in brake fluid in a clean glass jar.

3. Open bleeder valves at least 3/4 turn and allow fluid to flow until no air is seen in the fluid. Induced pulsation while the bleeder valves are open tends to purge the system. This pulsation can be created by depressing the pedal a maximum of 1/2" travel.

4. Close the bleed valves.

5. Check to brake pedal, feel for "sponginess" and repeat entire bleeding operation if necessary.

Flushing Brake Hydraulic System

It is recommended that the entire hydraulic system be

thoroughly flushed with clean brake fluid whenever new parts are installed in the hydraulic system.

Flushing is also recommended if there is any doubt as to the grade of fluid in the system. If fluid has been used which contains the slightest trace of mineral oil. All rub-

ber parts that have been subjected to the contaminated fluid should be replaced.

SPECIFICATIONS

BRAKE SPECIFICATIONS

Tightening Specifications


Use a reliable torque wrench to tighten the parts listed, to insure proper tightness without straining or distorting parts. These specifications are for clean and lightly-lubricated threads only; dry or dirty threads produce increased friction which prevents accurate measurement of tightness.

Part	Location	Thread Size	Torque Lb.Ft.
Nut	Brake Cylinder and Pedal Mounting Bracket to Dash	3/8-16	24
Nut	Parking Brake Mounting to Dash X, A, B, C, E	5/16-18	8
Screw	Parking Brake Mounting to Instrument Panel X, A, B, C, E	1/4-20	8
Nut	Parking Brake Front Cable to Equalizer A-B-C-E Cars	5/16-18	5
Nut	Parking Brake Equalizer Jam Nut		7
	Parking Brake Cable to Equalizer X Car		12
Bolt	Wheel Cylinder to Backing Plate Mounting	5/16-18	15
Bolt & Nut	Rear Brake Assembly to Axle Housing - A-B-C-E	3/8-24	35
	Rear Cable Bracket X Car		40
	Rear Hose Frame or Axle Bracket H and X Car		20
Nut	Wheel and Tire Assembly to Drum - H, X and A Cars	7/16-20	70
Nut	Wheel and Tire Assembly to Drum - B-C-E Cars	1/2-20	90
	Brake Bleeder Valve - X-A-B-C-E		5
	Brake Bleeder Valve - H		8
Nut	Brake Pedal Mounting - H Car		30
Nut	Front and Rear Brake Pipe to Master Cylinder - H Car		12
	Differential Switch to Bracket - H Car		12
	Front Brake Pipe Retainer Screw - H Car		8
	Rear Brake Pipe Clip to Body Screws - H Car		8
	Front Flex Hose Bolt to Caliper - H Car		22
	Front Flex Hose Bracket to Body - H Car		8
	Rear Pipe to Flex Hose - H Car		12
	Rear Pipe to Connector Block and Wheel Cylinders H Car		12
	Rear Pipe Bracket to Body - H Car		8
	Parking Brake Cover to Floor Pan Screw - H Car		3
	Parking Brake Lever to Floor Pan Bolt - H Car		7
	Parking Brake Cable Rear Hanger to Frame Bolt H Car		8

General Specifications


Operating Mechanism, Service Brake	Hydraulic
Operating Mechanism, Parking Brakes	Lever and Cables
Operation of Service Brakes Independent of Parking Brakes	Yes
Wheels Braked, Service	Front and Rear
Brake Drum Type, Front - X Cars	Finned Cast Iron
Brake Drum Type, Rear - All Series	Composite Cast Iron
Master Cylinder Piston Diameter - H Car	3/4"
Master Cylinder Piston Diameter, Drum Brakes Except H	1"
Master Cylinder Piston Diameter, Disc Brakes Except H	1-1/8"
Wheel Cylinder Size Front - X Cars	1-1/8"
Wheel Cylinder Size Rear - X and A Cars	7/8"
Wheel Cylinder Size Rear - H Car	3/4"
Wheel Cylinder Size Front - X-A-B-C-E Series Disc Brakes	2-15/16"
Wheel Cylinder Size Front - H Car Disc Brakes	1-7/8"

Wheel Cylinder Size Rear - B-C and A Wagons	15/16"
Wheel Cylinder Size Rear - E Cars	15/16"
Wheel Cylinder Size Rear - Estate Wagons	1"
Approved Hydraulic Brake Fluid	GM or Delco Supreme No. 11 or Equivalent
Fluid Level, From Lowest Portion of Top of Each Reservoir	1/4±1/8"
Brake Drum Inside Diameter New H Car	8.995-9.005
Brake Drum Inside Diameter, New - X and A - Cars Less Wagons	9.495-9.505"
Brake Drum Inside Diameter, Rear Only - B-C-E Cars and A Wagons	10.997-11.007"
Brake Drum Inside Diameter, Rear Only - Estate Wagons	11.997-12.007"
Brake Shoe Lining Length x Width X Cars Front (Drum Brakes)	Primary 7.63" x 2.50"
X Cars Front (Drum Brakes)	Secondary 9.92" x 2.50"
X Car Rear Primary (Manual Drum Power Disc).....	7.63" x 2.00"
X Car Rear Primary (Power Drum)	9.91" x 2.00"
X Car Rear Secondary	9.91" x 2.00"
A Cars Rear	Primary 7.65" x 2.00"
A Cars Rear	Secondary 9.92" x 2.00"
B-C-E Cars Rear	Primary 8.93" x 2.00"
B-C-E Cars Rear	Secondary 11.58" x 2.00"
Estate Wagons Rear	Primary 9.90" x 2.00"
Estate Wagons Rear	Secondary 12.85" x 2.00"
H Car Rear	Secondary 9.18" x 1.20"
H Car Rear	Primary 9.18" x 1.20"
Brake Drum Rebore, Max. Allowable Inside Diameter - X and A Cars	9.590"
H Car	9.090"
B-C-E Cars	11.090"
Estate Wagons	12.090"
Max. Allowable Taper - All Series003"
Max. Allowable Out-of-Round of Drum - B-C-E Cars002"
A Cars005"
Max. Allowable Out-of-Balance of Drum - H and X Cars	2 Oz.In.
Max. Allowable Out-of-Balance of Drum - All Series except X	3 Oz.In.
Max. Allowable Space Between Lining and Shoe Rim After Riveting X-A-B-C-E005"

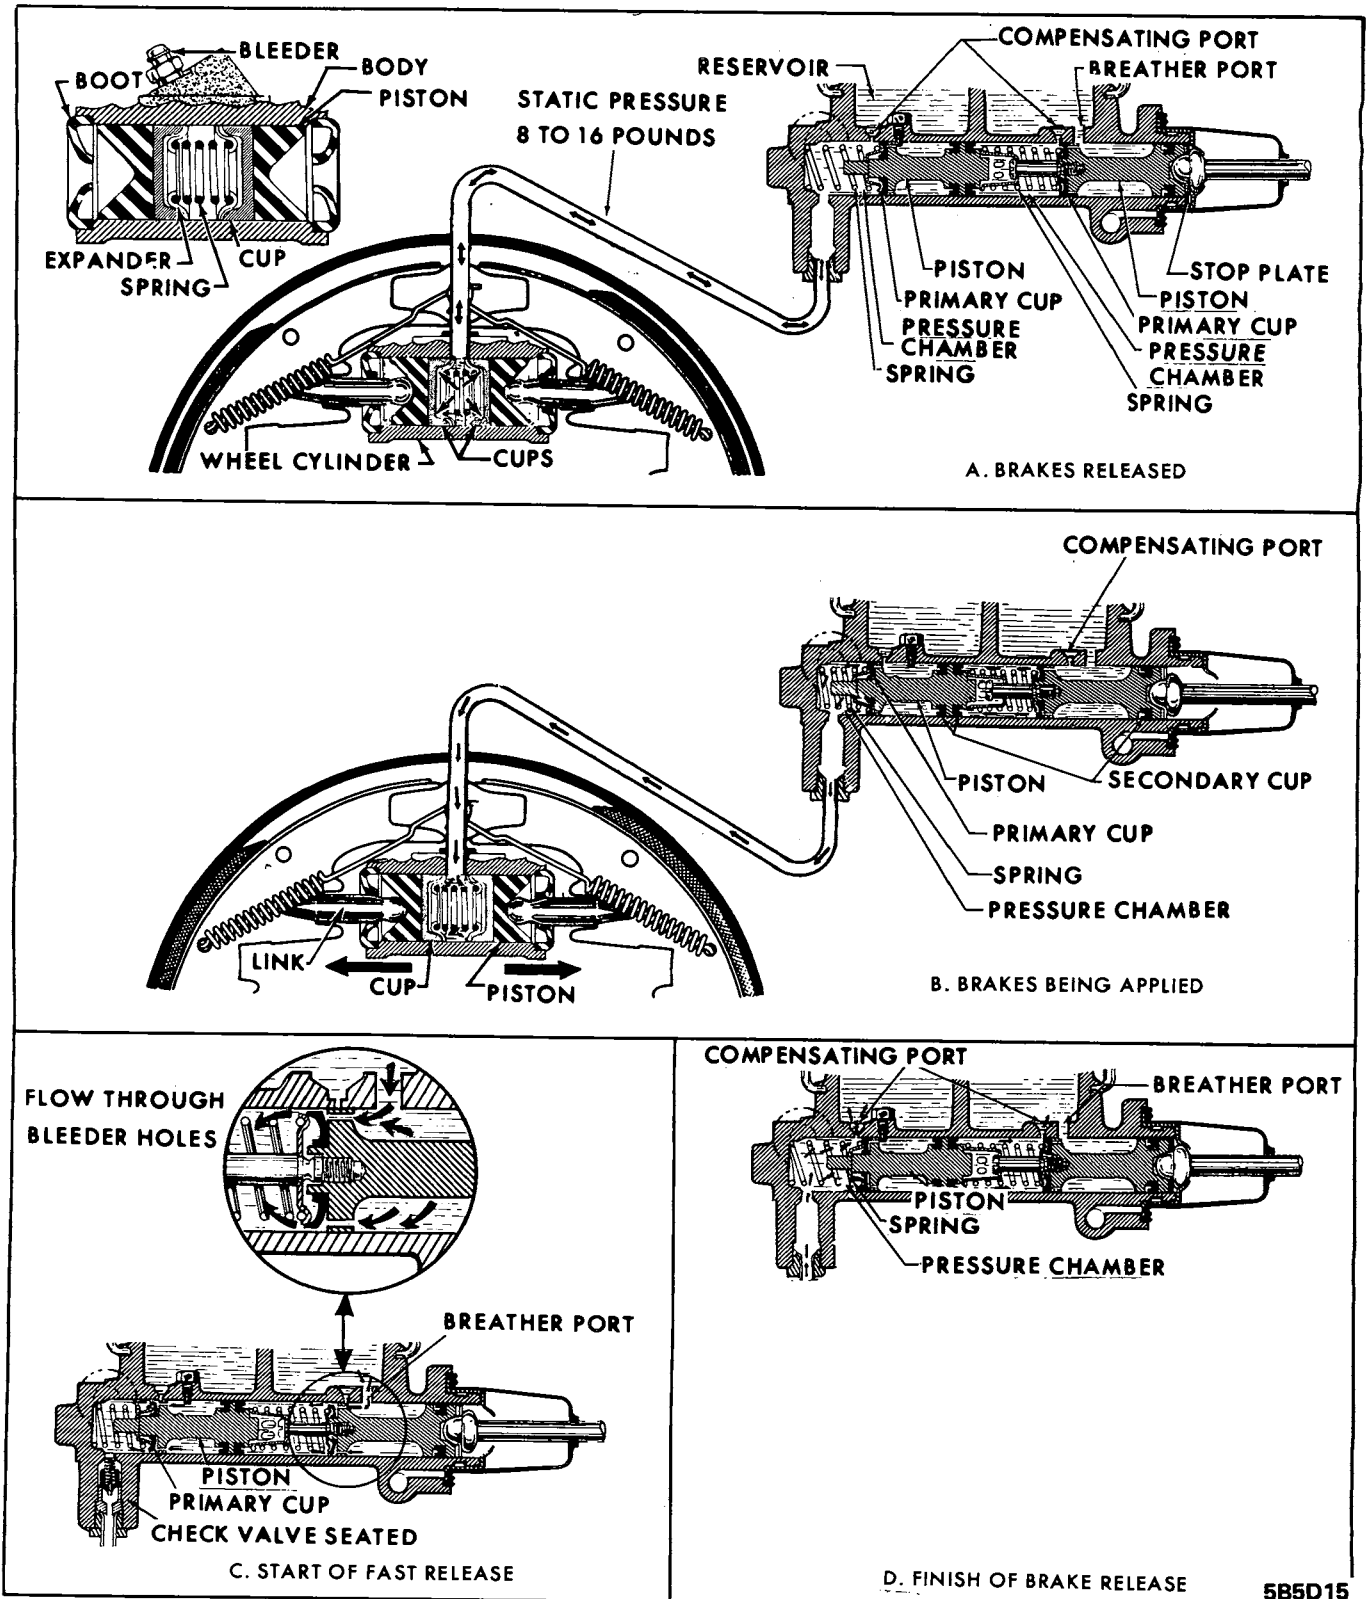


5B5D15

Figure 5D-15 Operation of Brake Hydraulic System

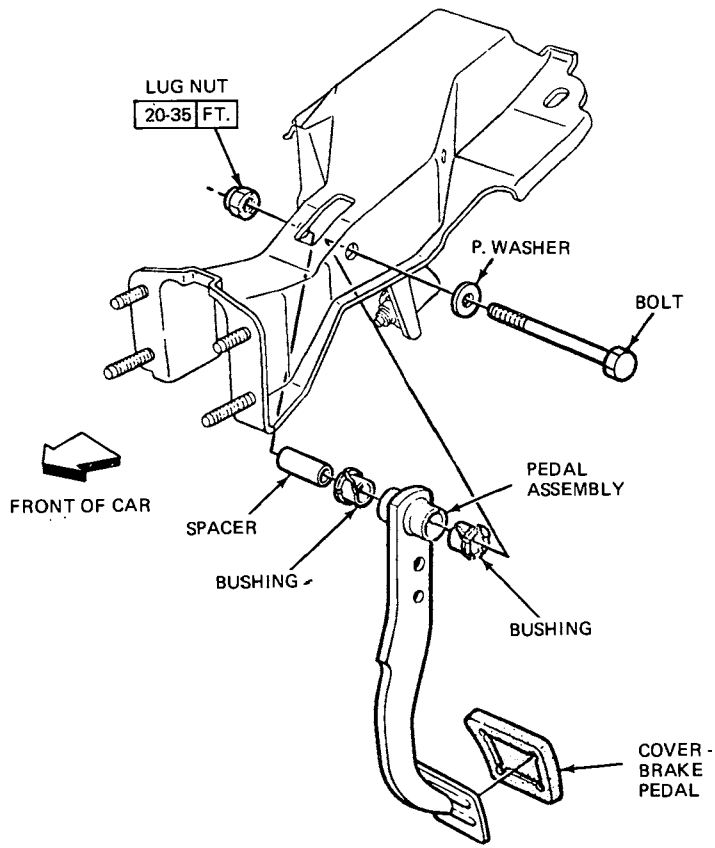

5B5D16

Figure 5D-16 - Brake Pedal Mounting - H Car

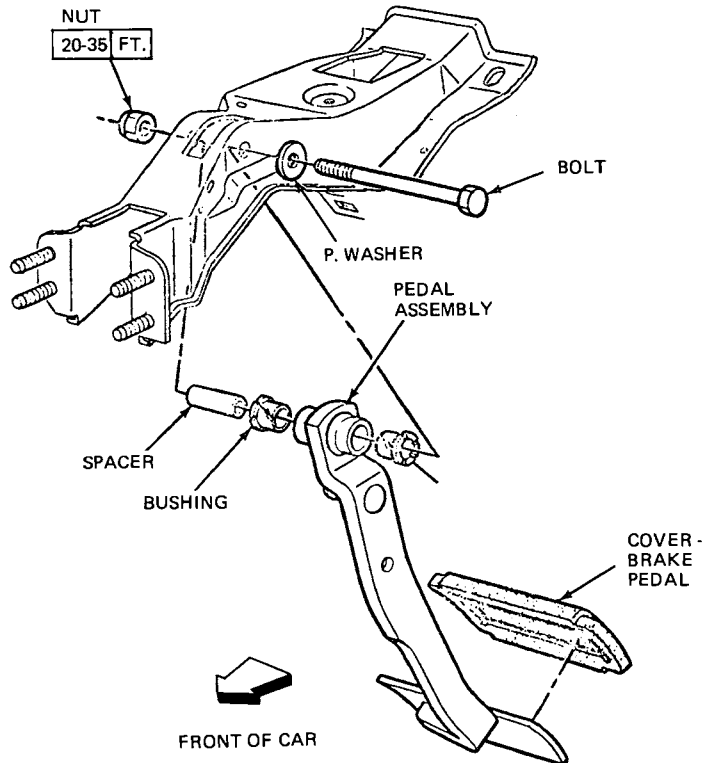

5B5D17

Figure 5D-17 Brake Pedal Mounting - X Car

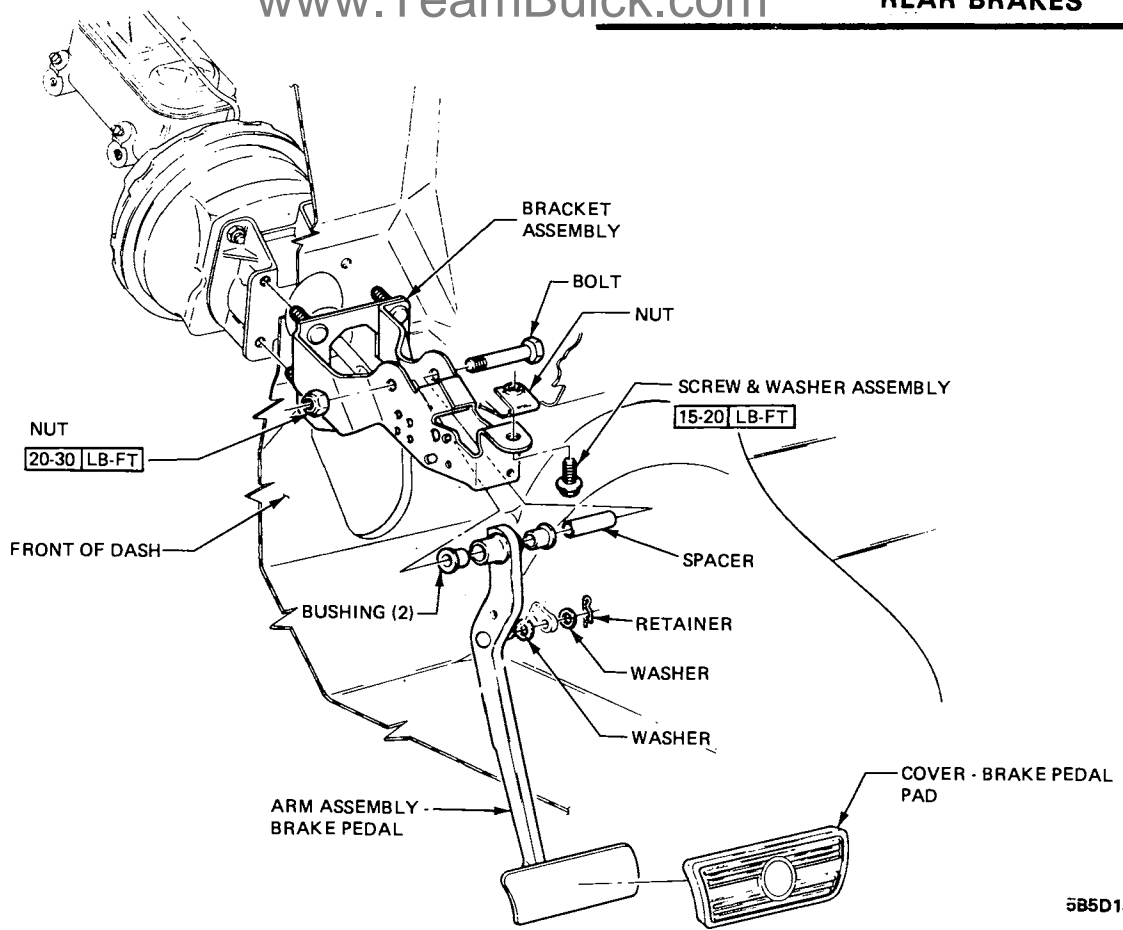


Figure 5D-18 Brake Pedal Mounting - A Car Power Brake

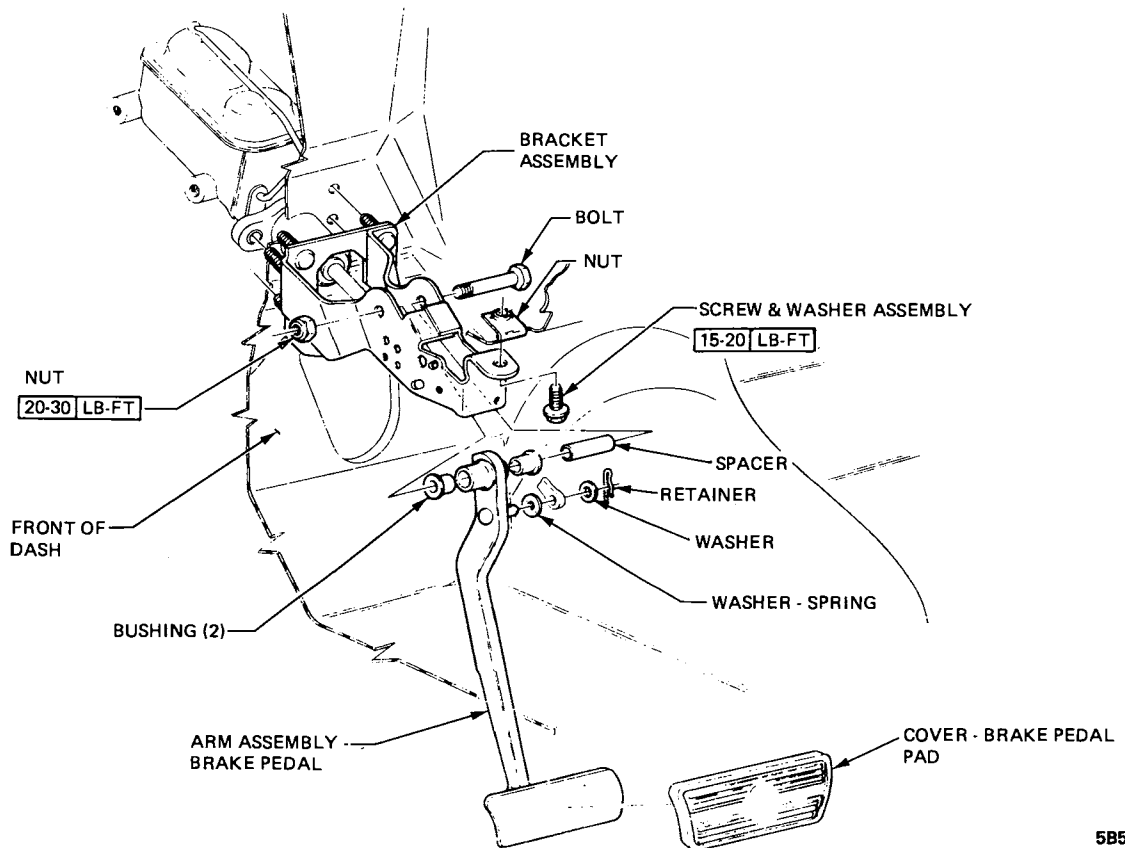


Figure 5D-19 Brake Pedal Mounting - A Car Manual Brake

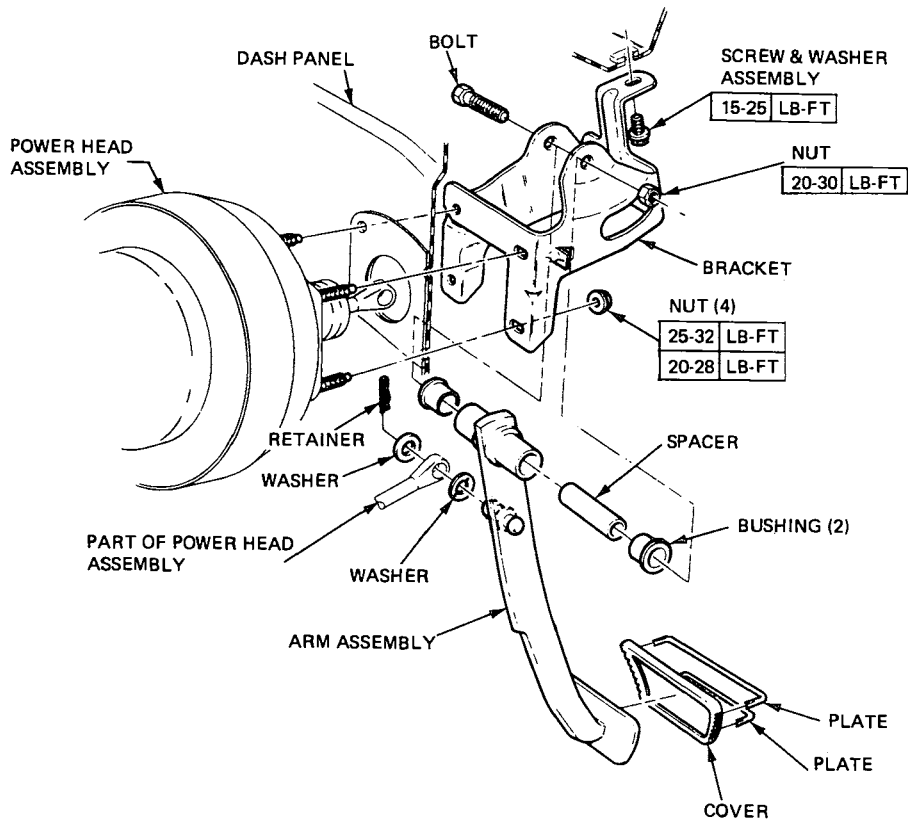


Figure 5D-20 Brake Pedal Mounting - B-C-E Car



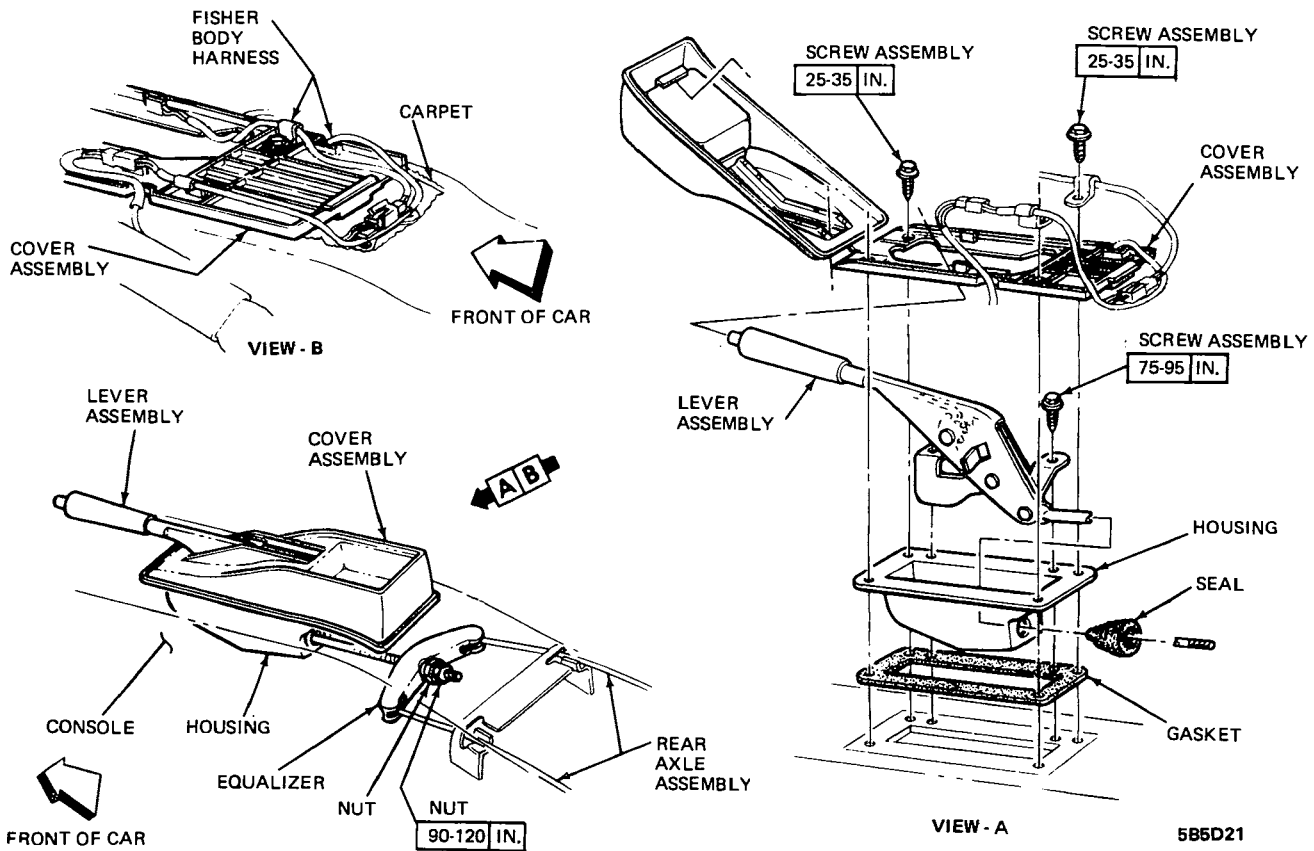


Figure 5D-21 - Parking Lever and Equalizer - H Car

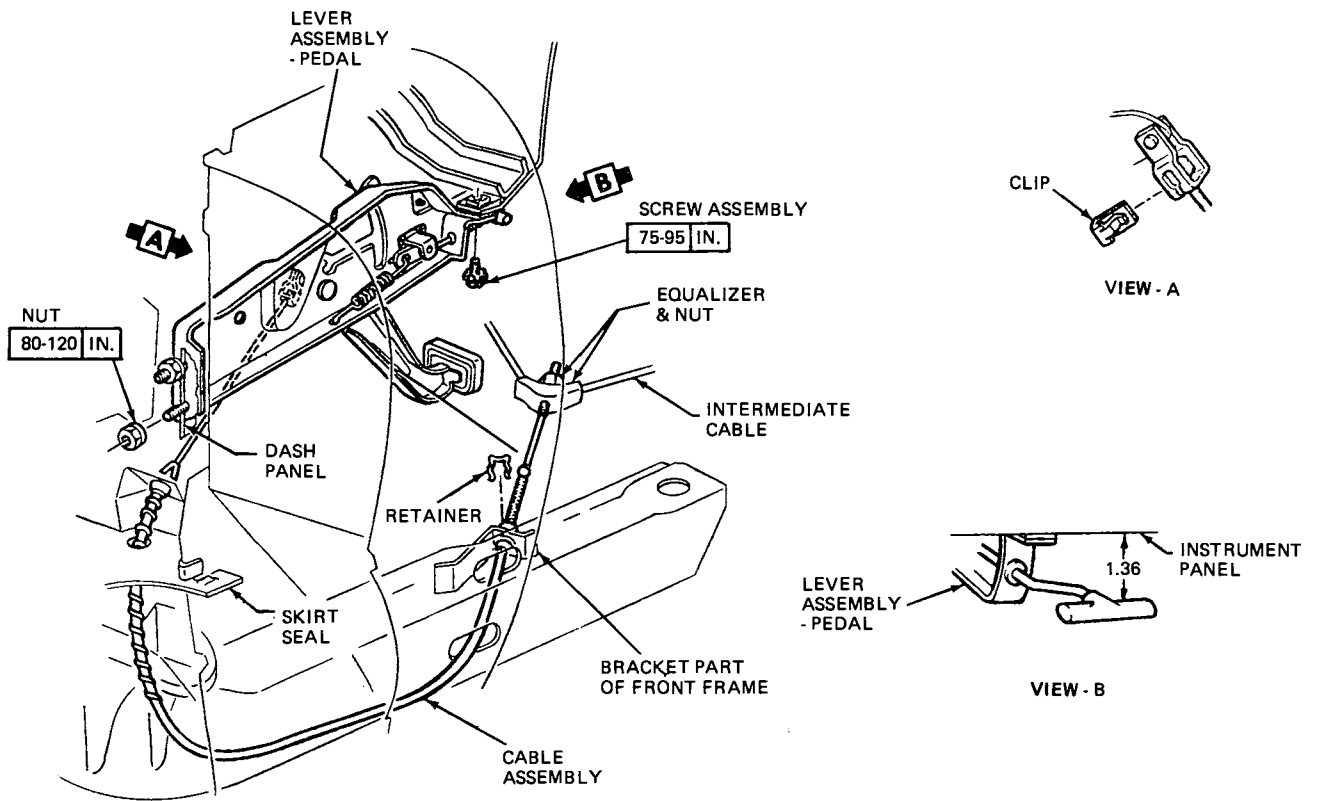

5B5D22

Figure 5D-22 Parking Brake Control Assy. - X Car

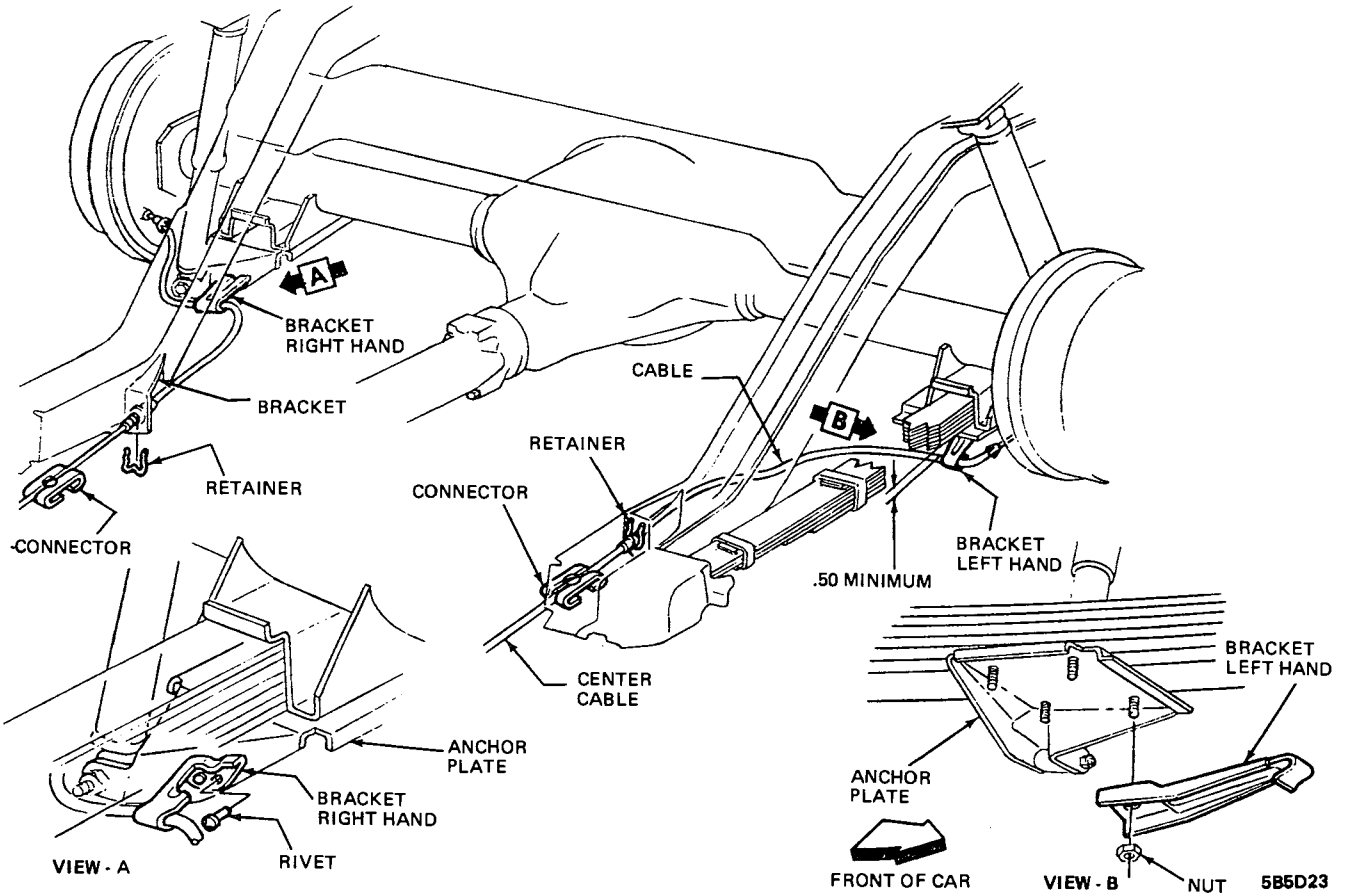

5B5D23

Figure 5D-23 Parking Brake Rear Cables - X Car

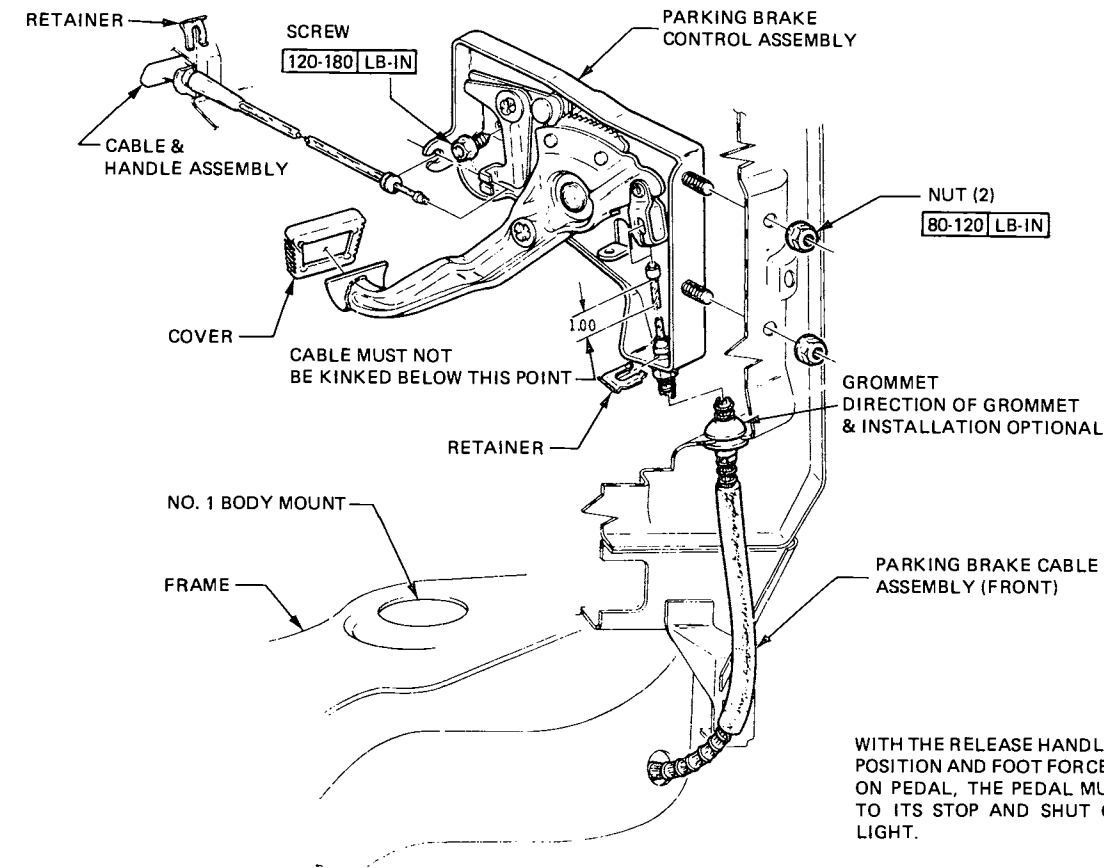


Figure 5D-24 Parking Brake Control Assy. - A Car

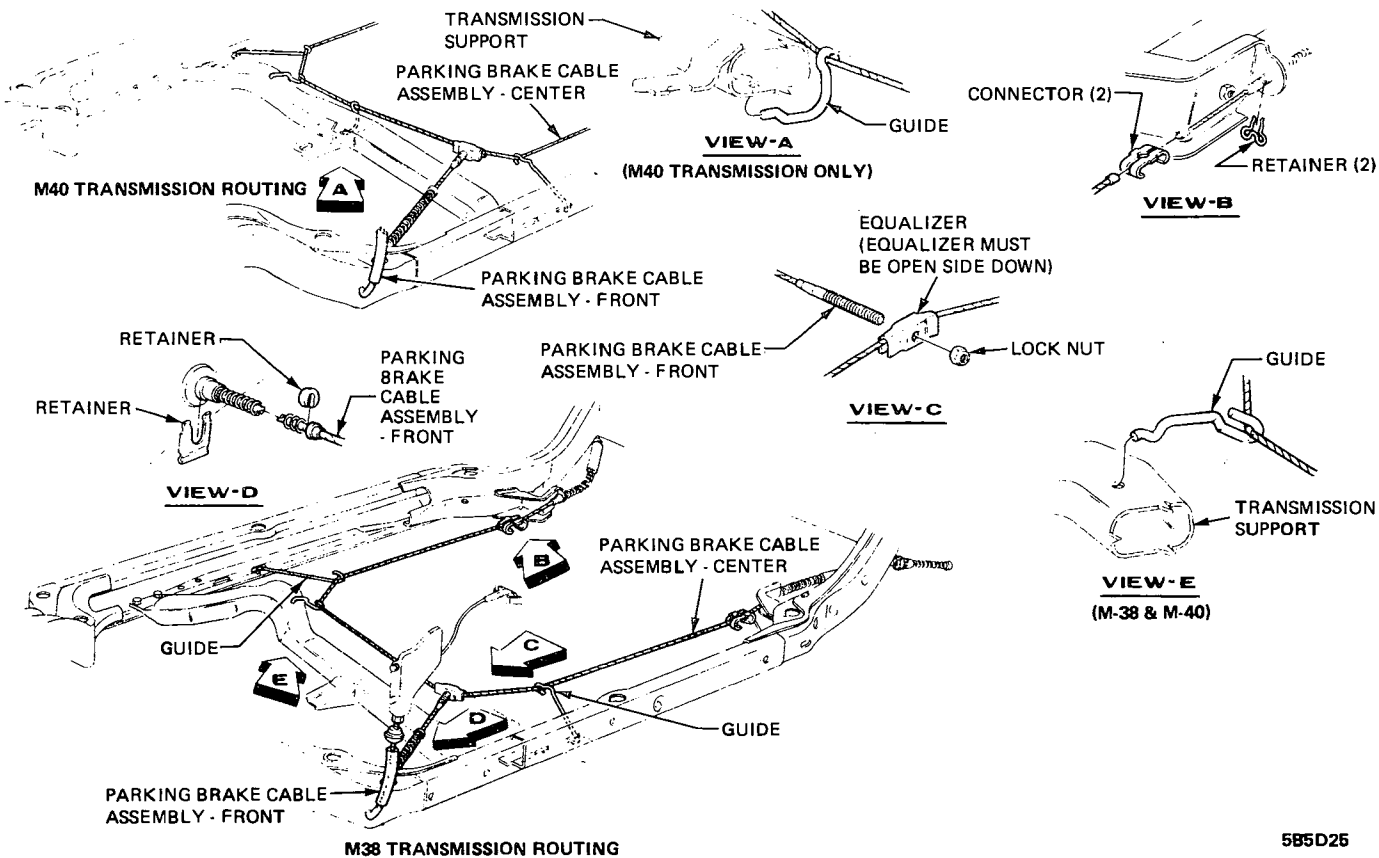


Figure 5D-25 Parking Brake Cable Assy. - A Car

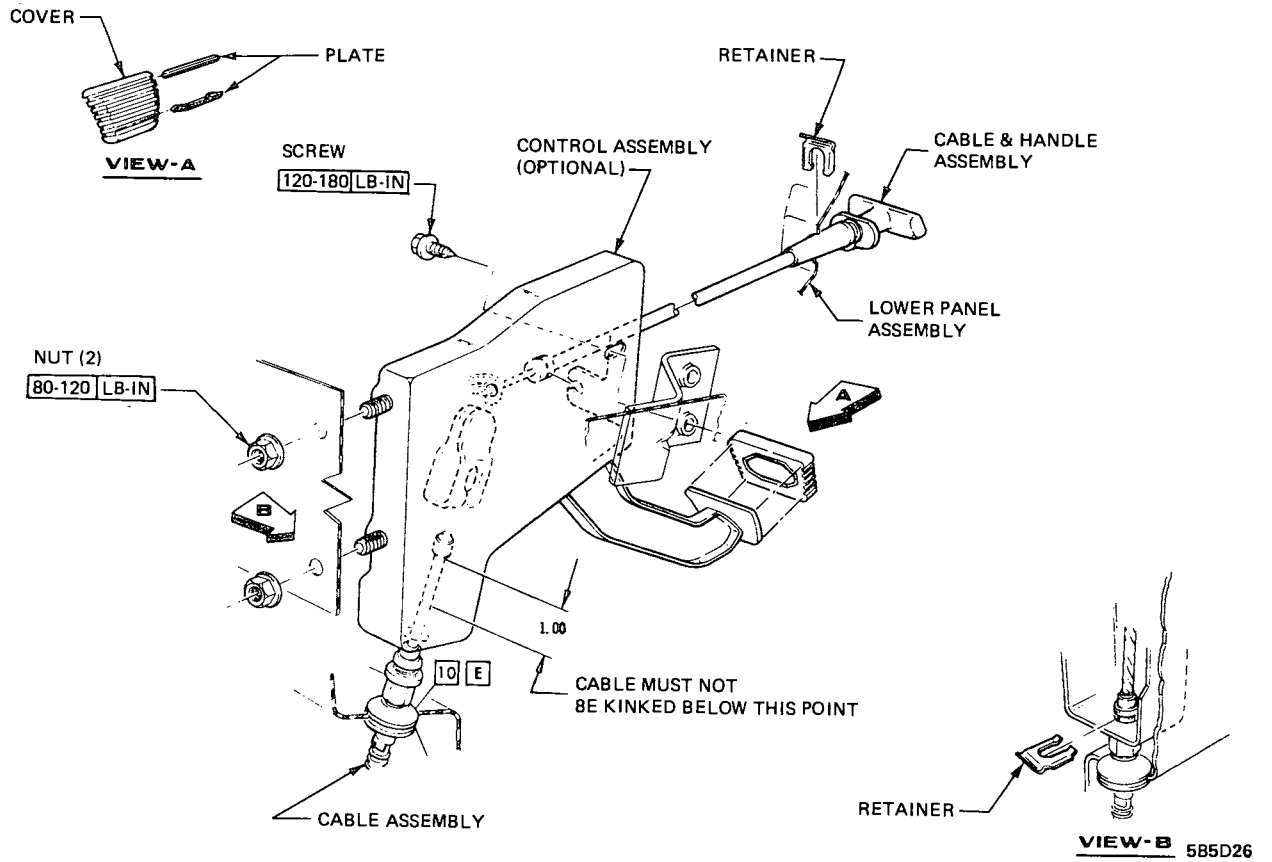


Figure 5D-26 Parking Brake Control Assy. - B-C-E Car

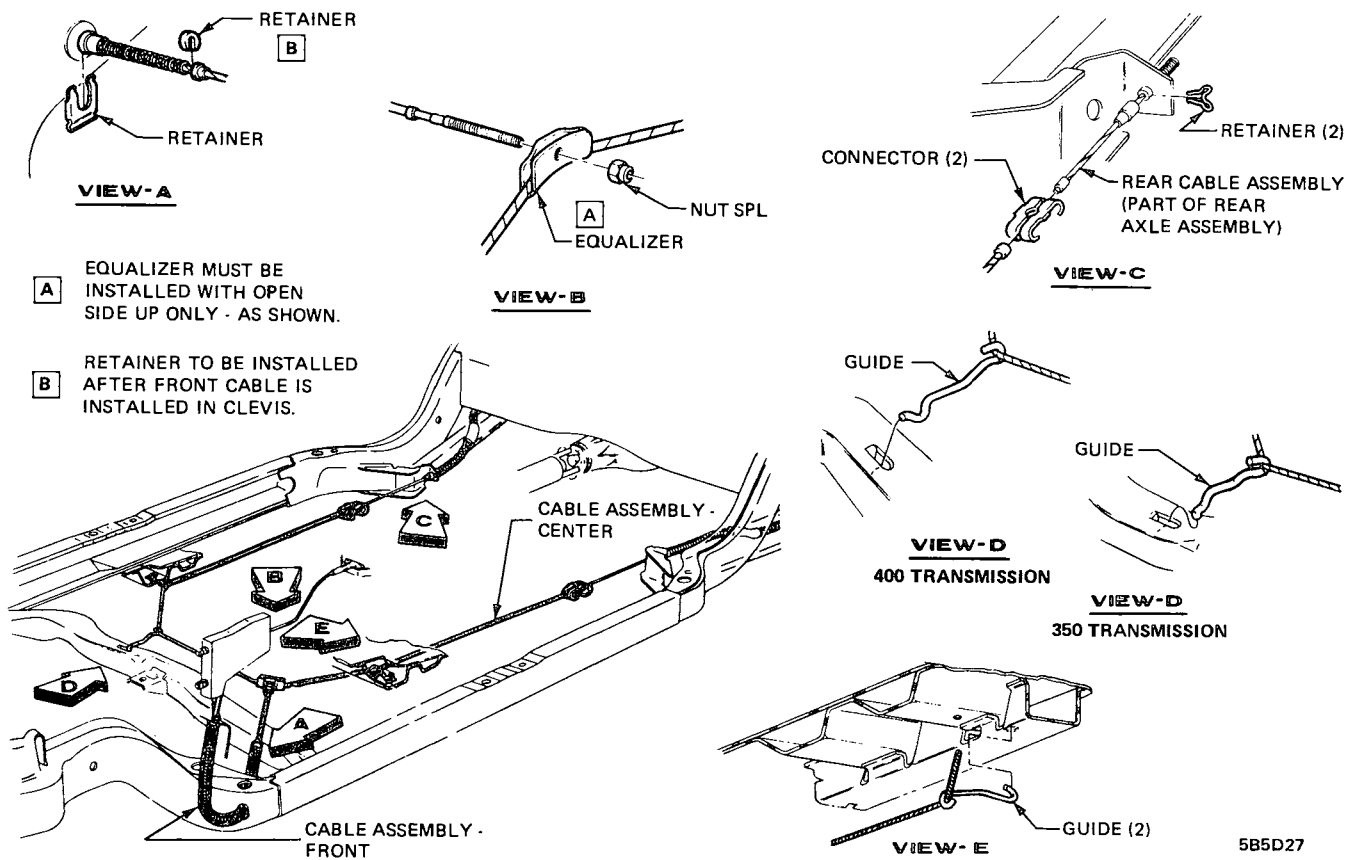


Figure 5D-27 Parking Brake Cable Assy. - B-C-E Car

A EQUALIZER MUST BE INSTALLED WITH OPEN SIDE UP ONLY - AS SHOWN.

B RETAINER TO BE INSTALLED AFTER FRONT CABLE IS INSTALLED IN CLEVIS.

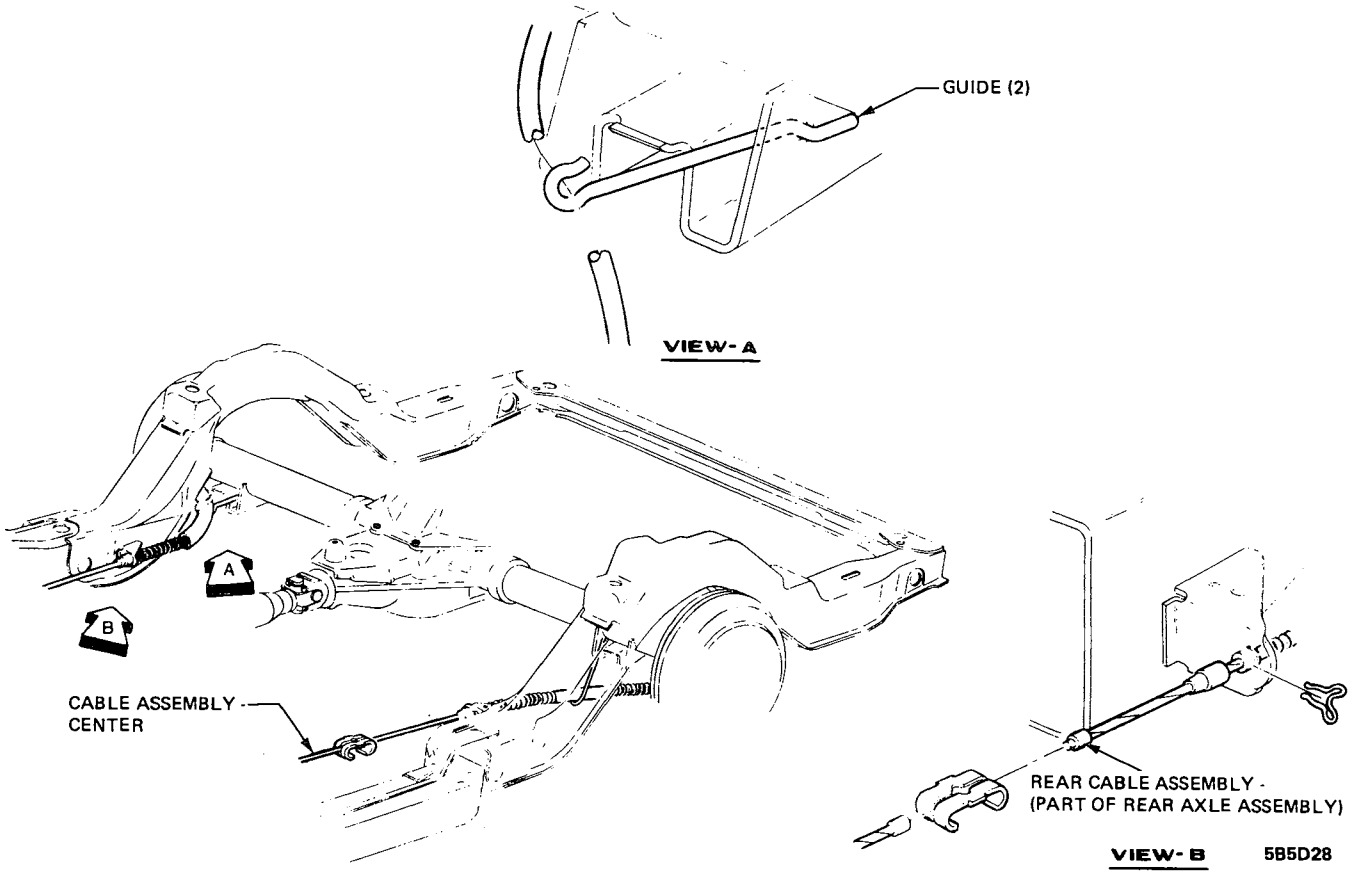


Figure 5D-28 Parking Brake Cable Assy. - Estate Wagon



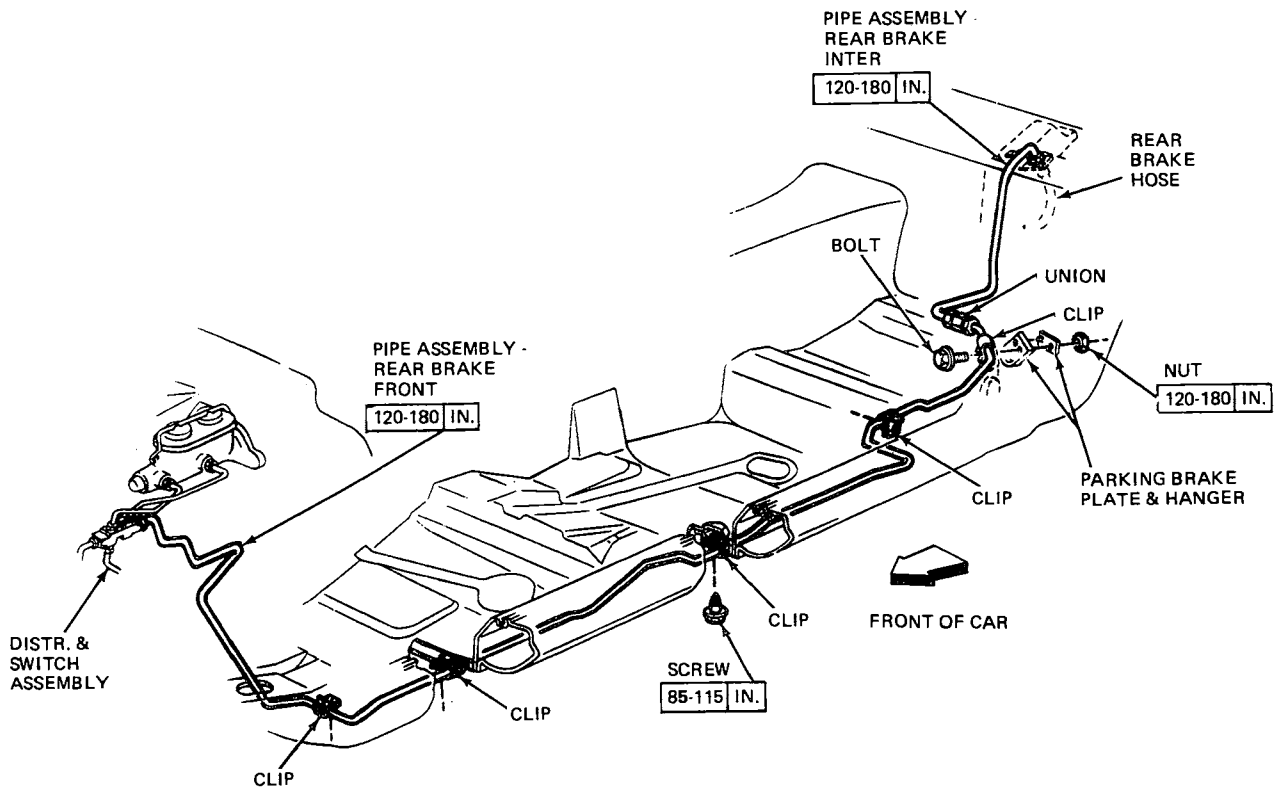


Figure 5D-29 - Center Brake Pipes - H Car

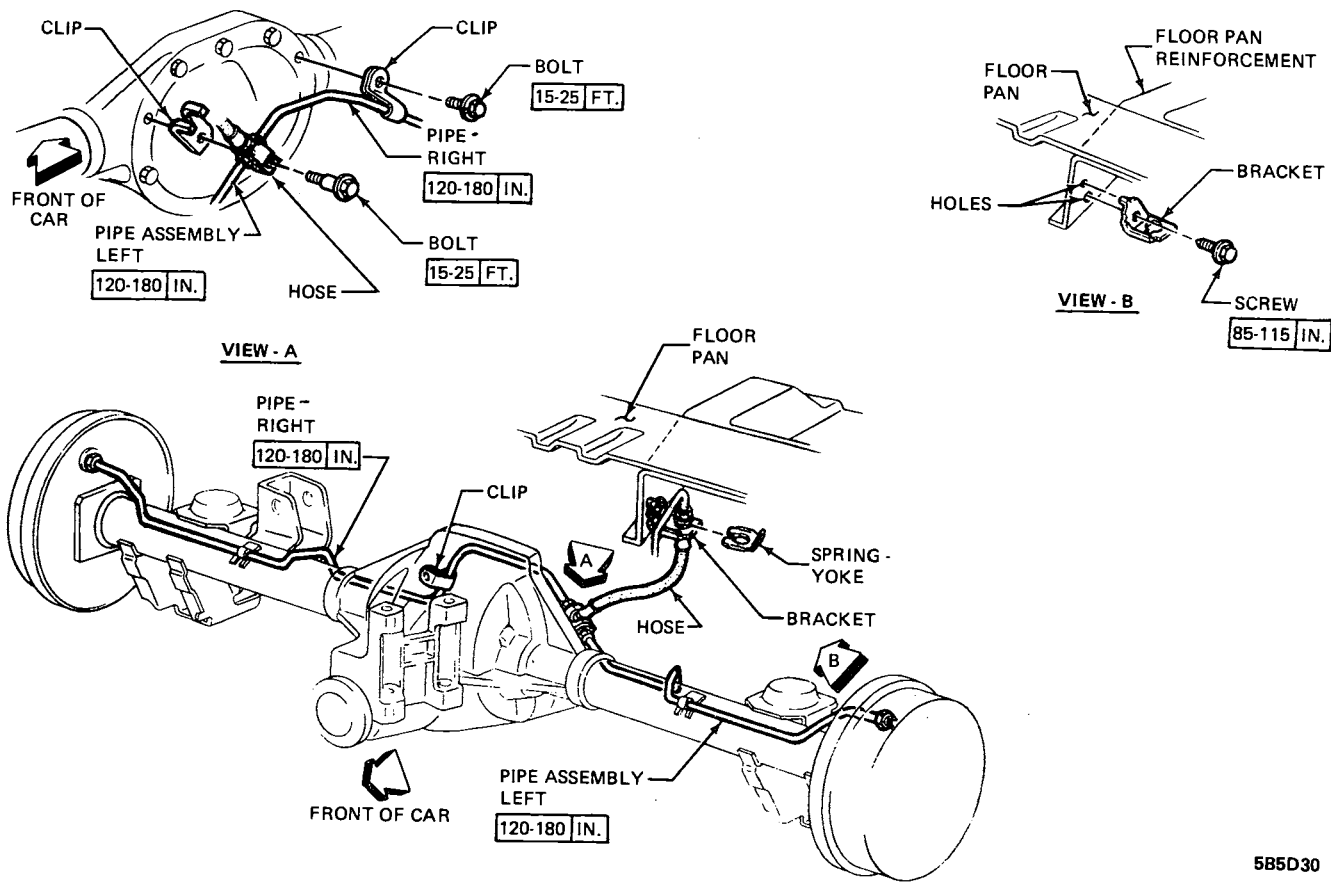


5B5D30

Figure 5D-30 Rear Brake Pipes - H Car

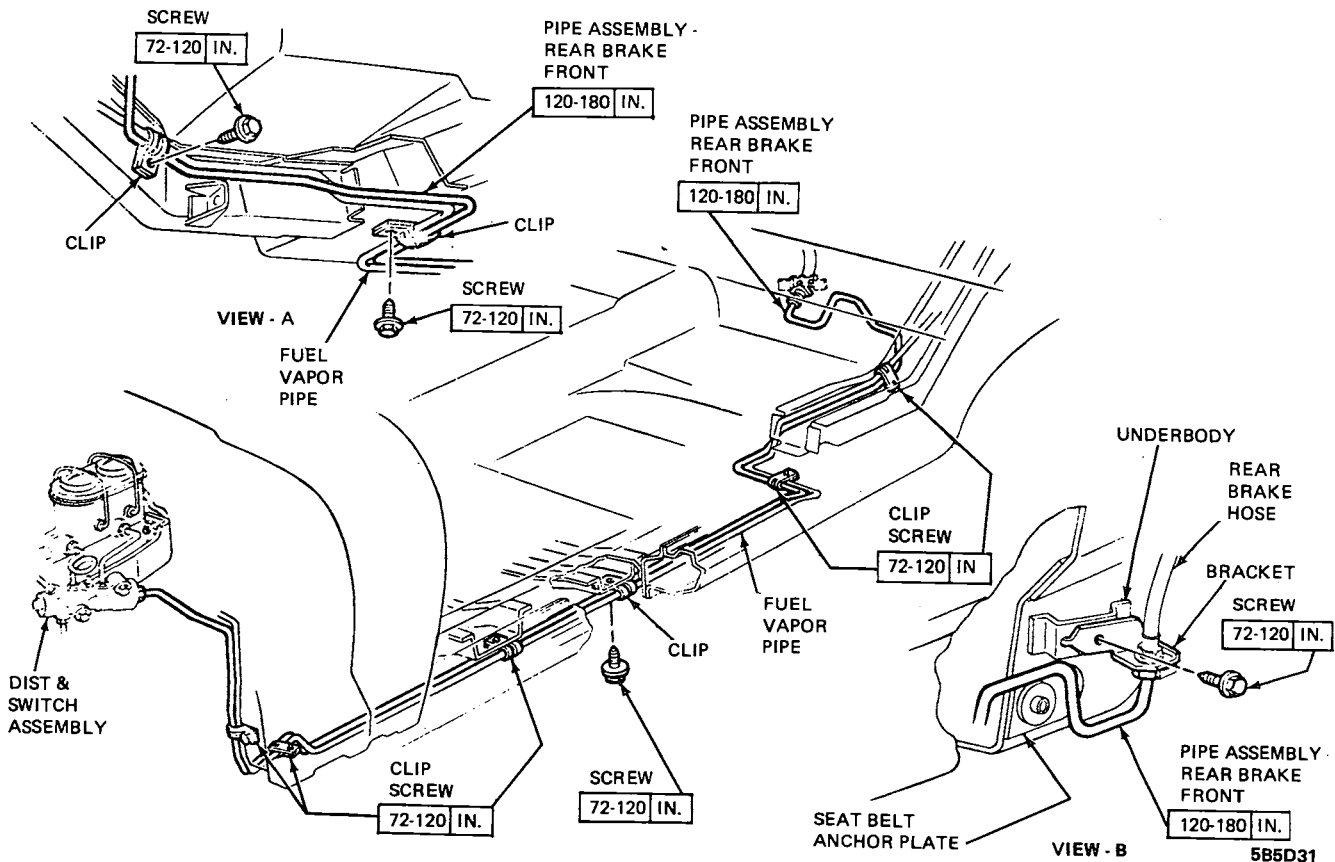


5B5D31

Figure 5D-31 Center Brake Pipes - X Car

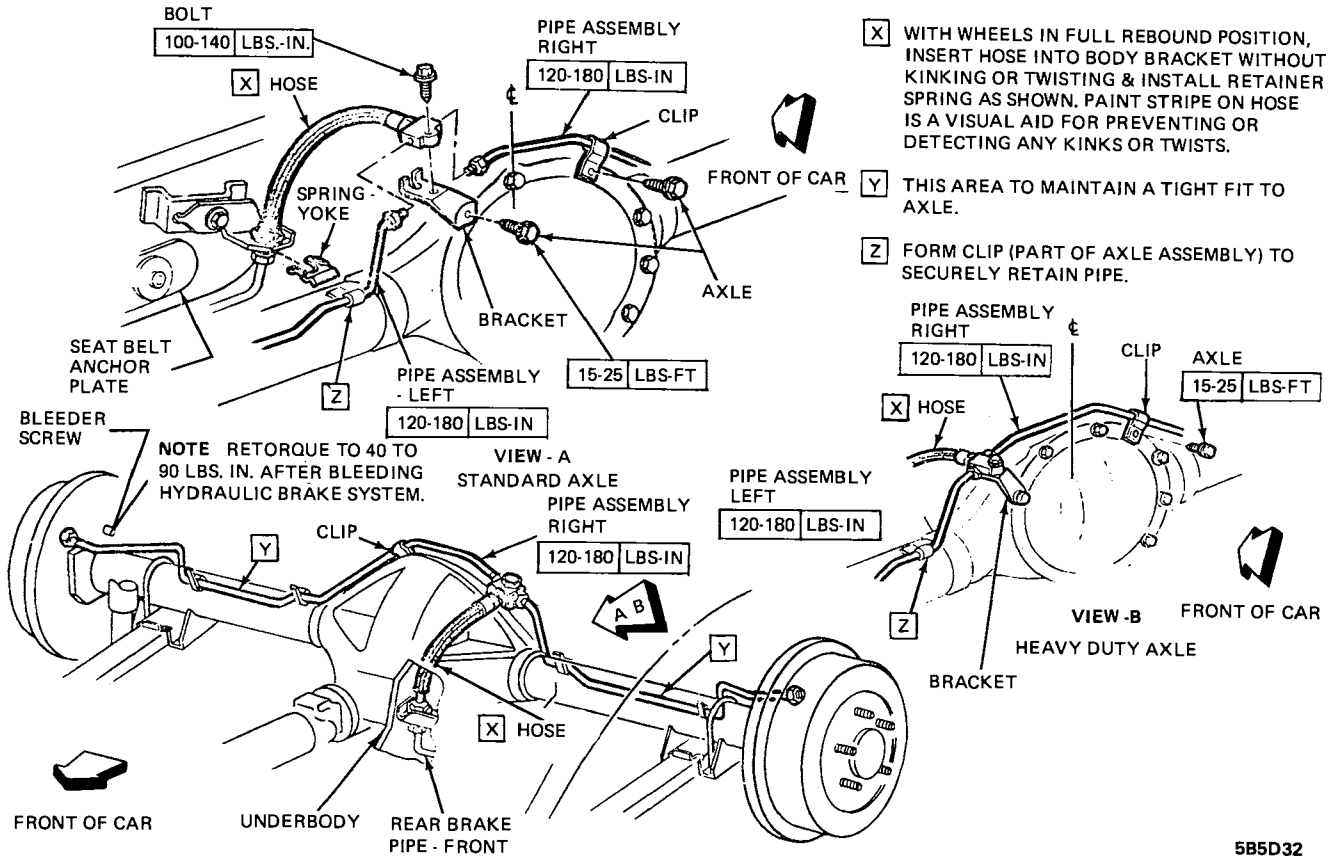

5B5D32

Figure 5D-32 Rear Brake Pipes - X Car

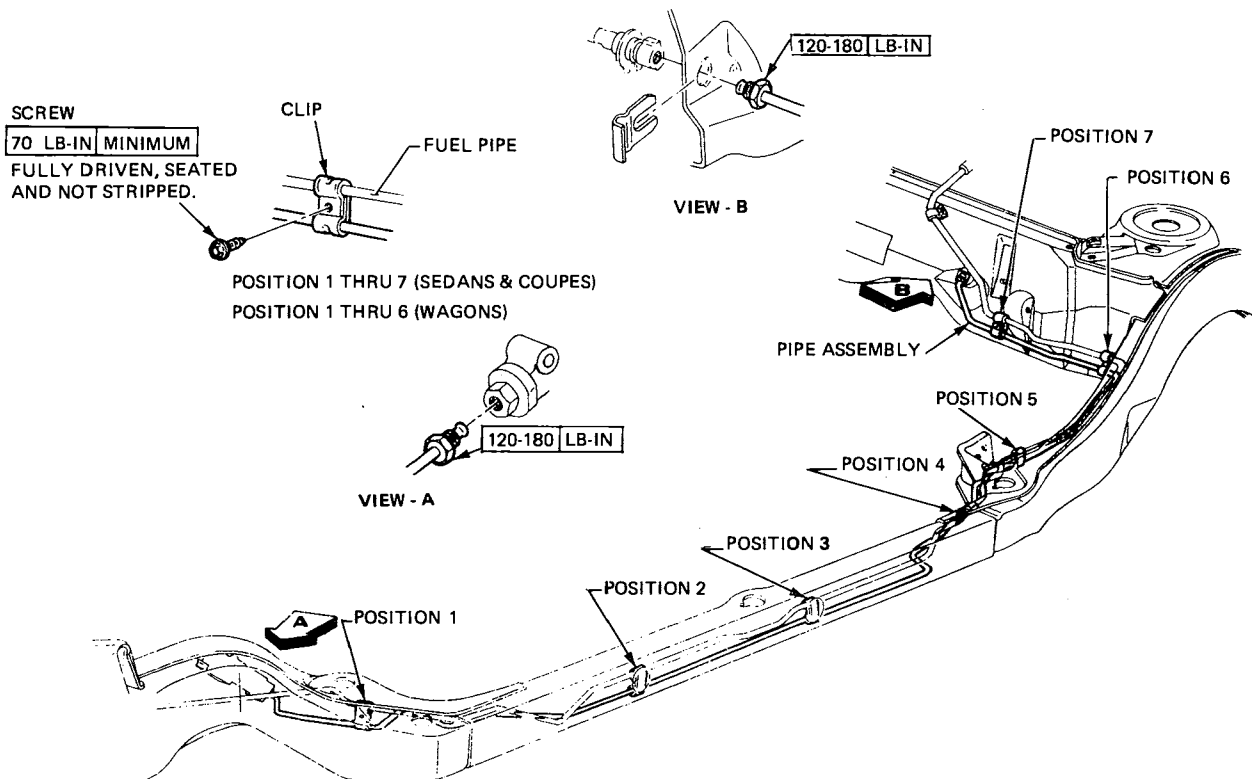


5B5D33

Figure 5D-33 Center Brake Pipes - A Car

A


RECOMMENDED PROCEDURE:

SECURE BRAKE PIPES TO TEE FIRST, NEXT TO THE WHEEL CYLINDER AND FINALLY TO THE AXLE HOUSING BY CLOSING THE RETAINER CLIPS

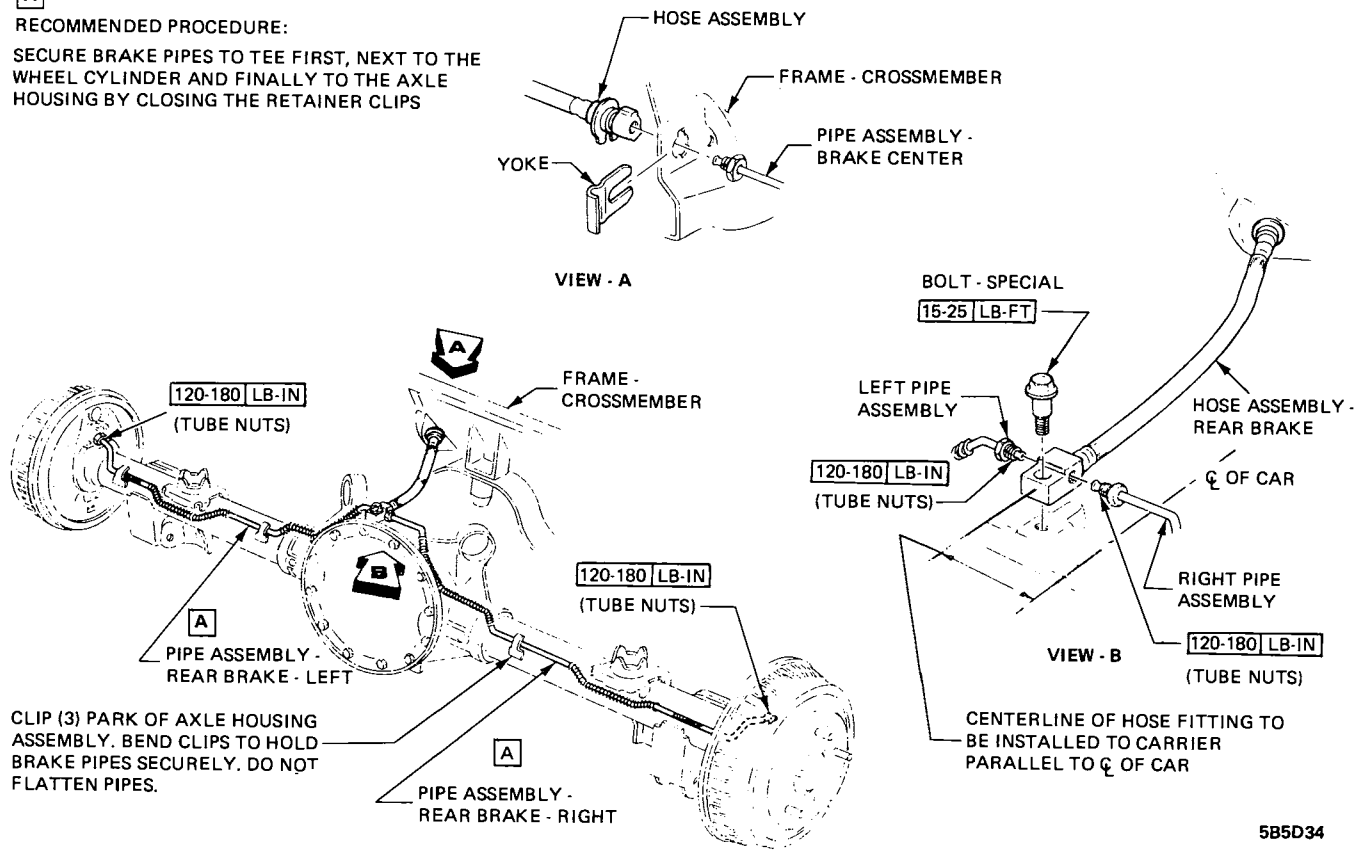

5B5D34

Figure 5D-34 Rear Brake Pipes - A Car

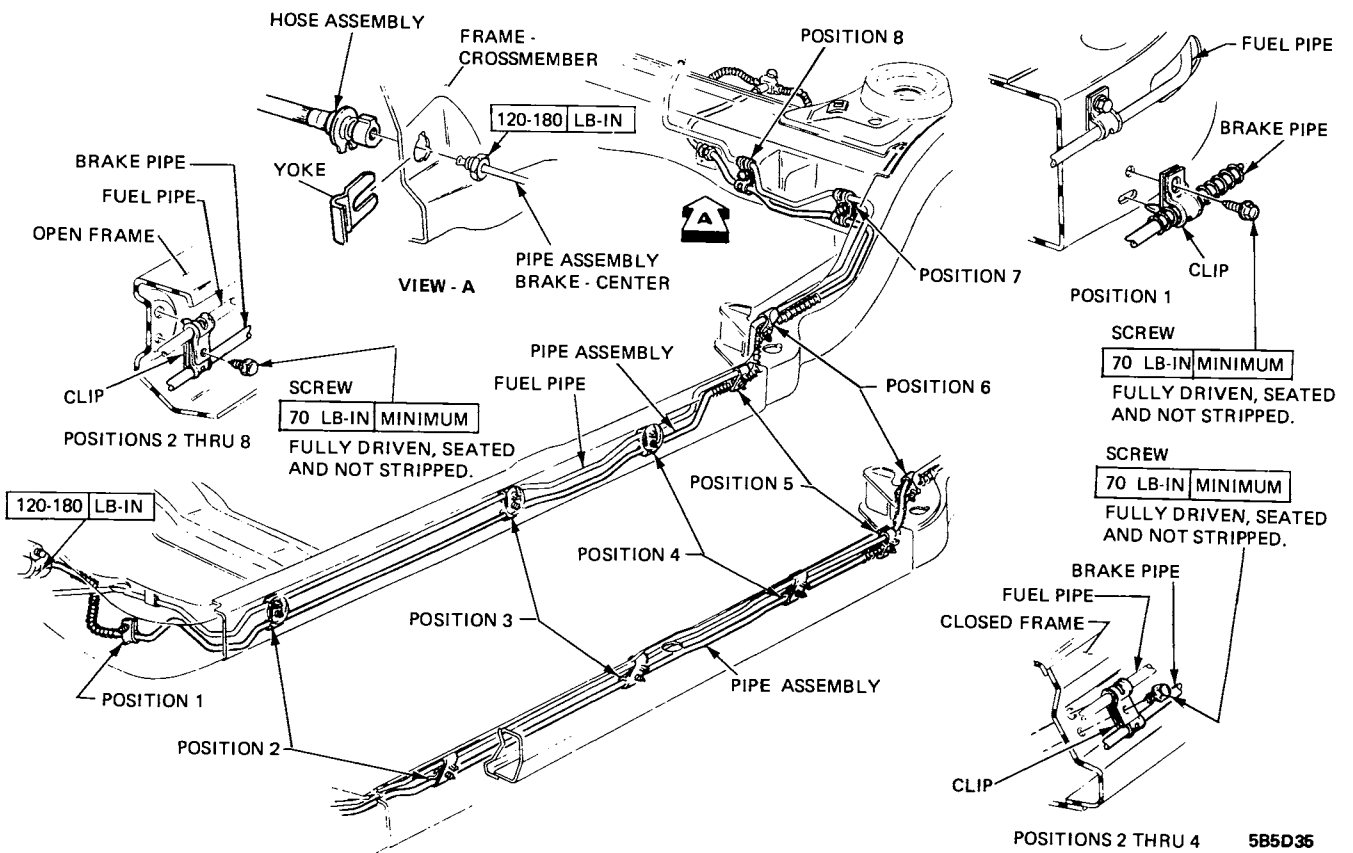

5B5D35

Figure 5D-35 Center Brake Pipes - B-C-E Car

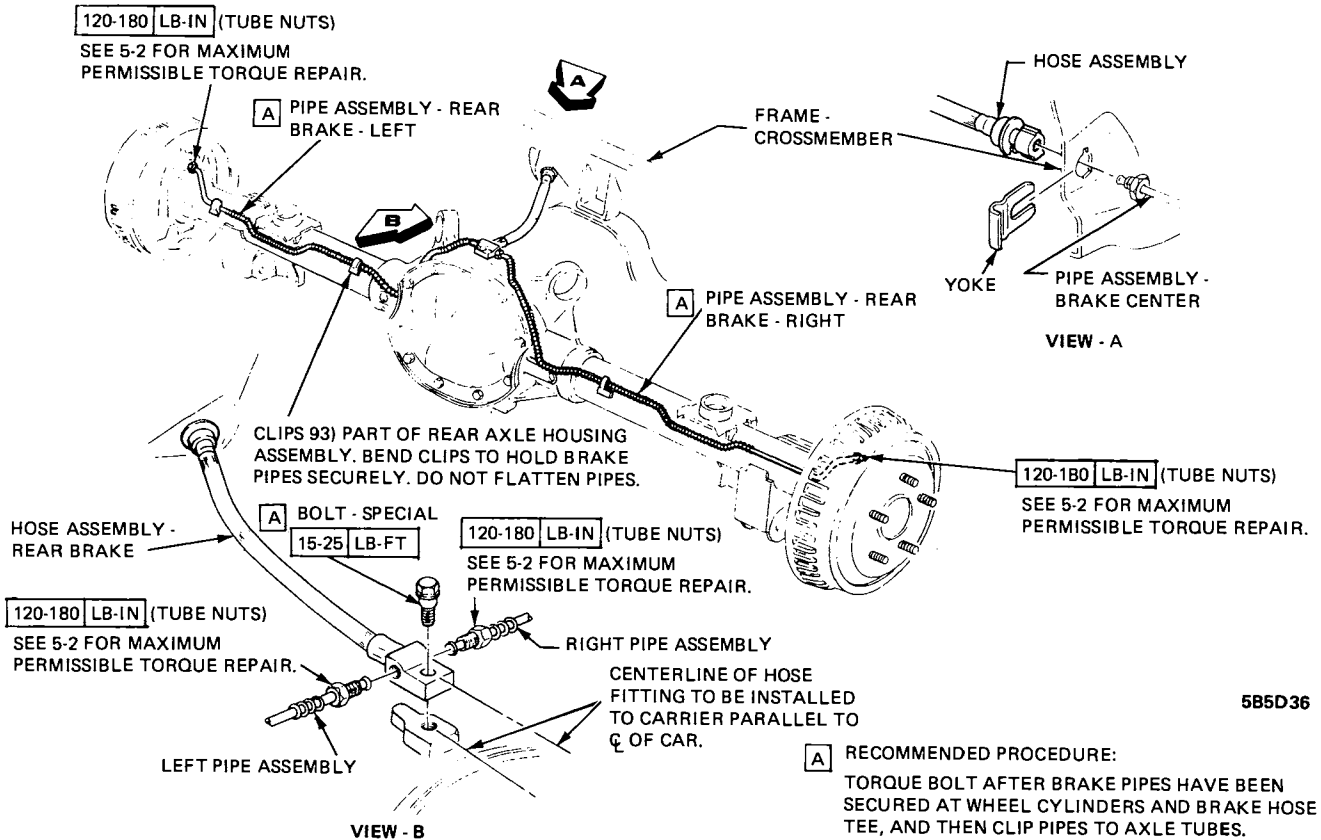


Figure 5D-36 Rear Brake Pipes - B-C-E Car



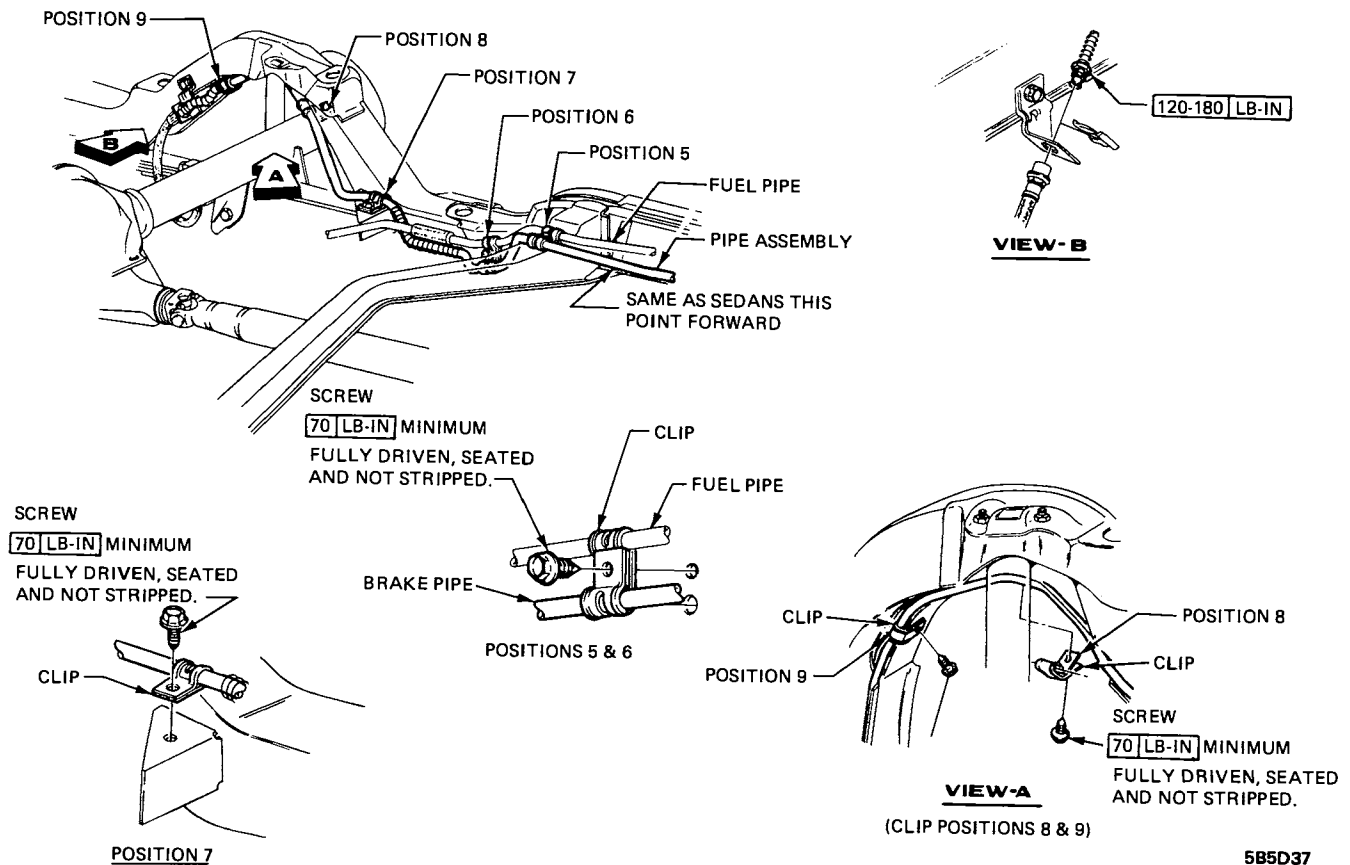


Figure 5D-37 Center Brake Pipes - Estate Wagon

- A** CLIPS - PART OF REAR AXLE HOUSING ASSEMBLY - BEND CLIPS TO HOLD BRAKE PIPES SECURELY, DO NOT FLATTEN PIPES.
- B** BRAKE HOSE MUST CLEAR FRONT OF RESONATOR BY 2" AND INLET PIPE BY 2 1/4" (DUAL EXHAUST).

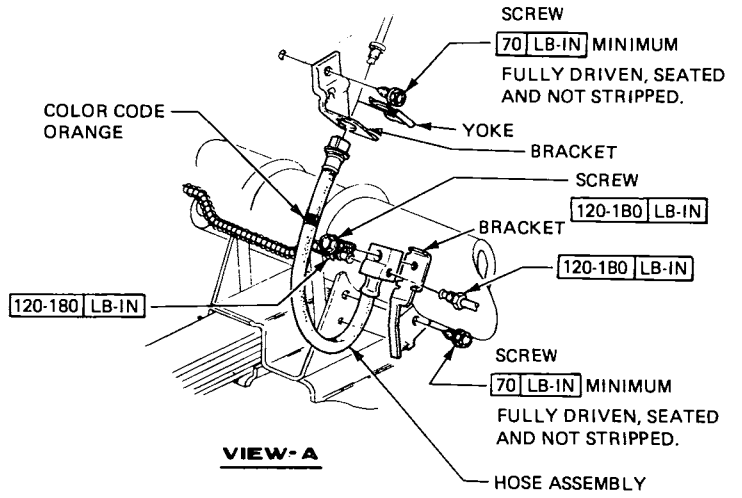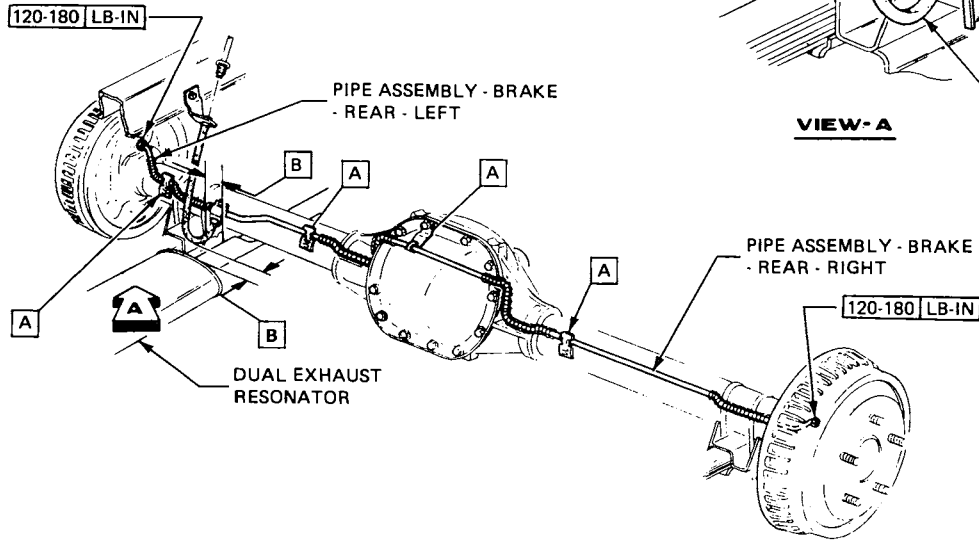

5B5D38

Figure 5D-38 Rear Brake Pipes - Estate Wagon