

SECTION B

45-46-48-49000 FRONT SUSPENSION

CONTENTS

Division	Paragraph	Subject	Page
I		SPECIFICATIONS AND ADJUSTMENTS:	
	30-1	Bolt Torque Specifications	30-18
	30-2	Dimensional Specifications	30-18
II		DESCRIPTION AND OPERATION:	
	30-3	Suspension Description	30-19
III		SERVICE PROCEDURES:	
	31-1	Front Wheel Alignment	30-21
	31-2	Removal and Installation of Ball Joints and Steering Knuckle . .	30-24
	31-3	Removal and Installation of Upper Control Arm Assembly . .	30-26
	31-4	Removal and Installation of Lower Control Arm Assembly . .	30-27
	33-1	Removal and Installation of Front Springs	30-27
	36-1	Shock Absorber Service	30-28
	37-1	Removal and Installation of Stabilizer Bar	30-28
	37-2	Removal and Installation of Brake Reaction Rods	30-29
IV		TROUBLE DIAGNOSIS:	
	37-2	Faulty Springs, Shock Absorbers, and Ball Joints	30-29

DIVISION I SPECIFICATIONS AND ADJUSTMENTS


30-5 BOLT TORQUE SPECIFICATIONS

Use a reliable torque wrench to tighten the parts listed to insure proper tightness without straining or distorting parts. These specifications are for clean and lightly lubricated threads only; dry or dirty threads produce increased friction which prevents accurate measurement of tightness.

Parts	Location	Torque Lb. Ft.
Nut & Bolt	Brake Reaction Rod to Lower Control Arm	45-60
Nut	Brake Reaction Rod to Frame	40-60
Bolt & Nut	Front Shock to Lower Control Arm	30-40
Nut	Front Shock to Frame	5-10
Bolt	Stabilizer Bushing to Frame	40-60
Nut	Upper Control Arm Shaft to Frame	75-100
Nut	Upper Ball Joint to Knuckle	30-40
Bolt & Nut	Front Lower Control Arm to Frame	80-120
Nut	Lower Ball Joint to Knuckle	70-95
Nut	Stabilizer Link to Lower Control Arm	5-10

30-6 DIMENSIONAL SPECIFICATIONS

Stabilizer Bar Diameter	25/32"
Steering Knuckle Spindle	
Large End	1.3743-1.7348
Small End	8.430-8.435

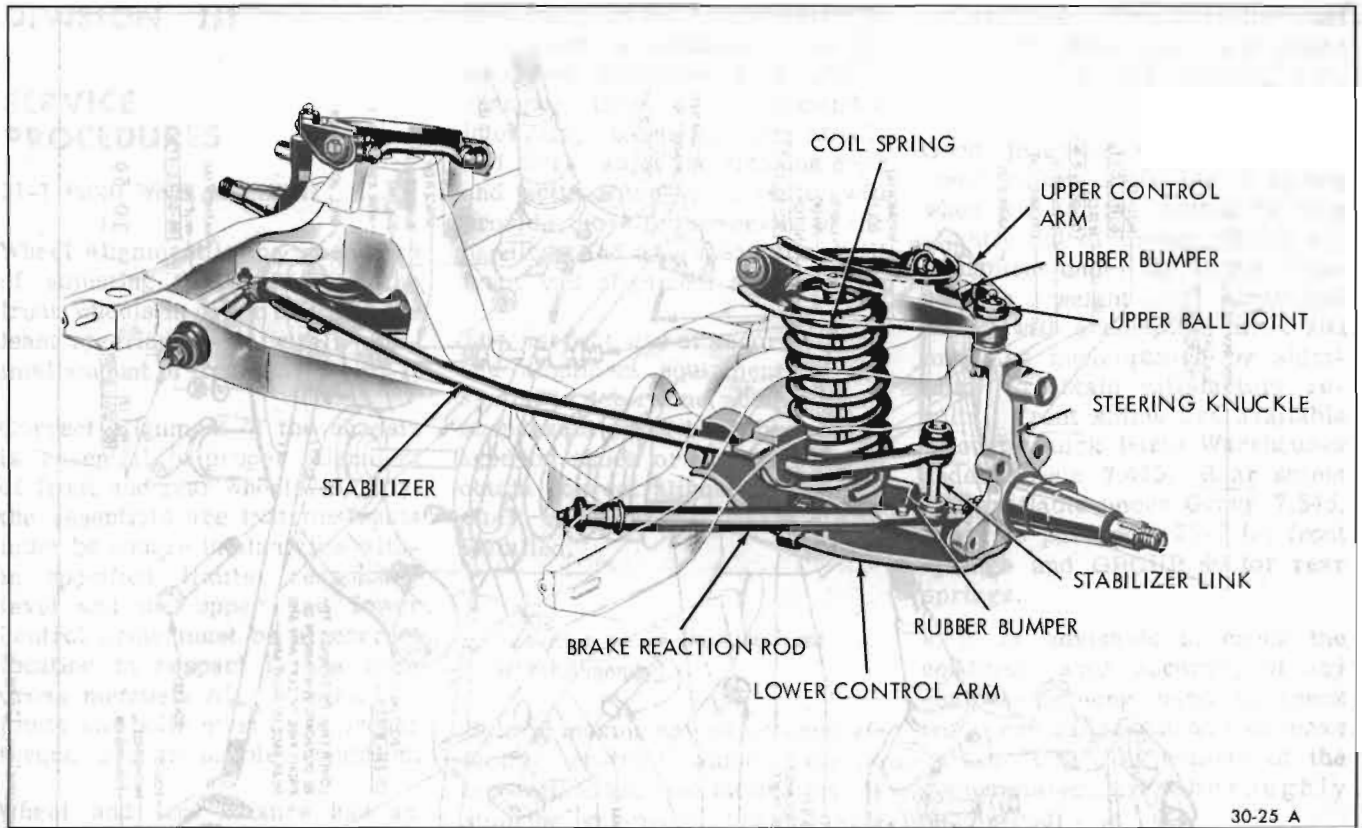

30-25 A

Figure 30-27—Front Suspension

DIVISION II DESCRIPTION AND OPERATION

30-3 SUSPENSION DESCRIPTION

The front suspension on the 1967 Buick is designed to allow each wheel to compensate for changes in the road surface level without appreciably affecting the opposite wheel. Each wheel is independently connected to the frame by a steering knuckle, ball joint assemblies, and upper and lower control arms. The control arms are specifically designed and positioned to allow the steering knuckles to move only in a vertical arc. The front wheels are held in proper relationship to each other by two tie rods which are connected to steering arms on the knuckles and to an intermediate rod.


Coil chassis springs are mounted between the spring housings on the frame and the lower control arms. Ride control is provided by double direct acting shock absorbers mounted inside the coil springs and attached to the lower control arm by bolts. The upper portion of each shock absorber extends through the spring housing and is secured with two grommets, two grommet retainers, and a nut.

Side roll of the front suspension is controlled by a spring steel stabilizer shaft. It is mounted in rubber bushings which are held to the frame side rails by brackets. The ends of the stabilizer are connected to the front side of the lower control arms by means of links which are isolated by rubber grommets at which provide flexibility and prevent rattles.

A ball joint is pressed into the outer end of the upper arm. It is spring loaded to insure proper alignment of the ball in the socket.

The inner ends of the lower control arms are bolted to the frame front cross member through rubber bushings. The outer end of each arm is connected to the steering knuckle with a ball socket assembly pressed in the lower control arm and bolted to the steering knuckle. Fore-aft alignment of the control arm is maintained by a brake reaction rod.

Shock absorbers are Delco direct double-acting type. Details on the operation of this type of shock absorber can be found under paragraph 30-4 Section A.

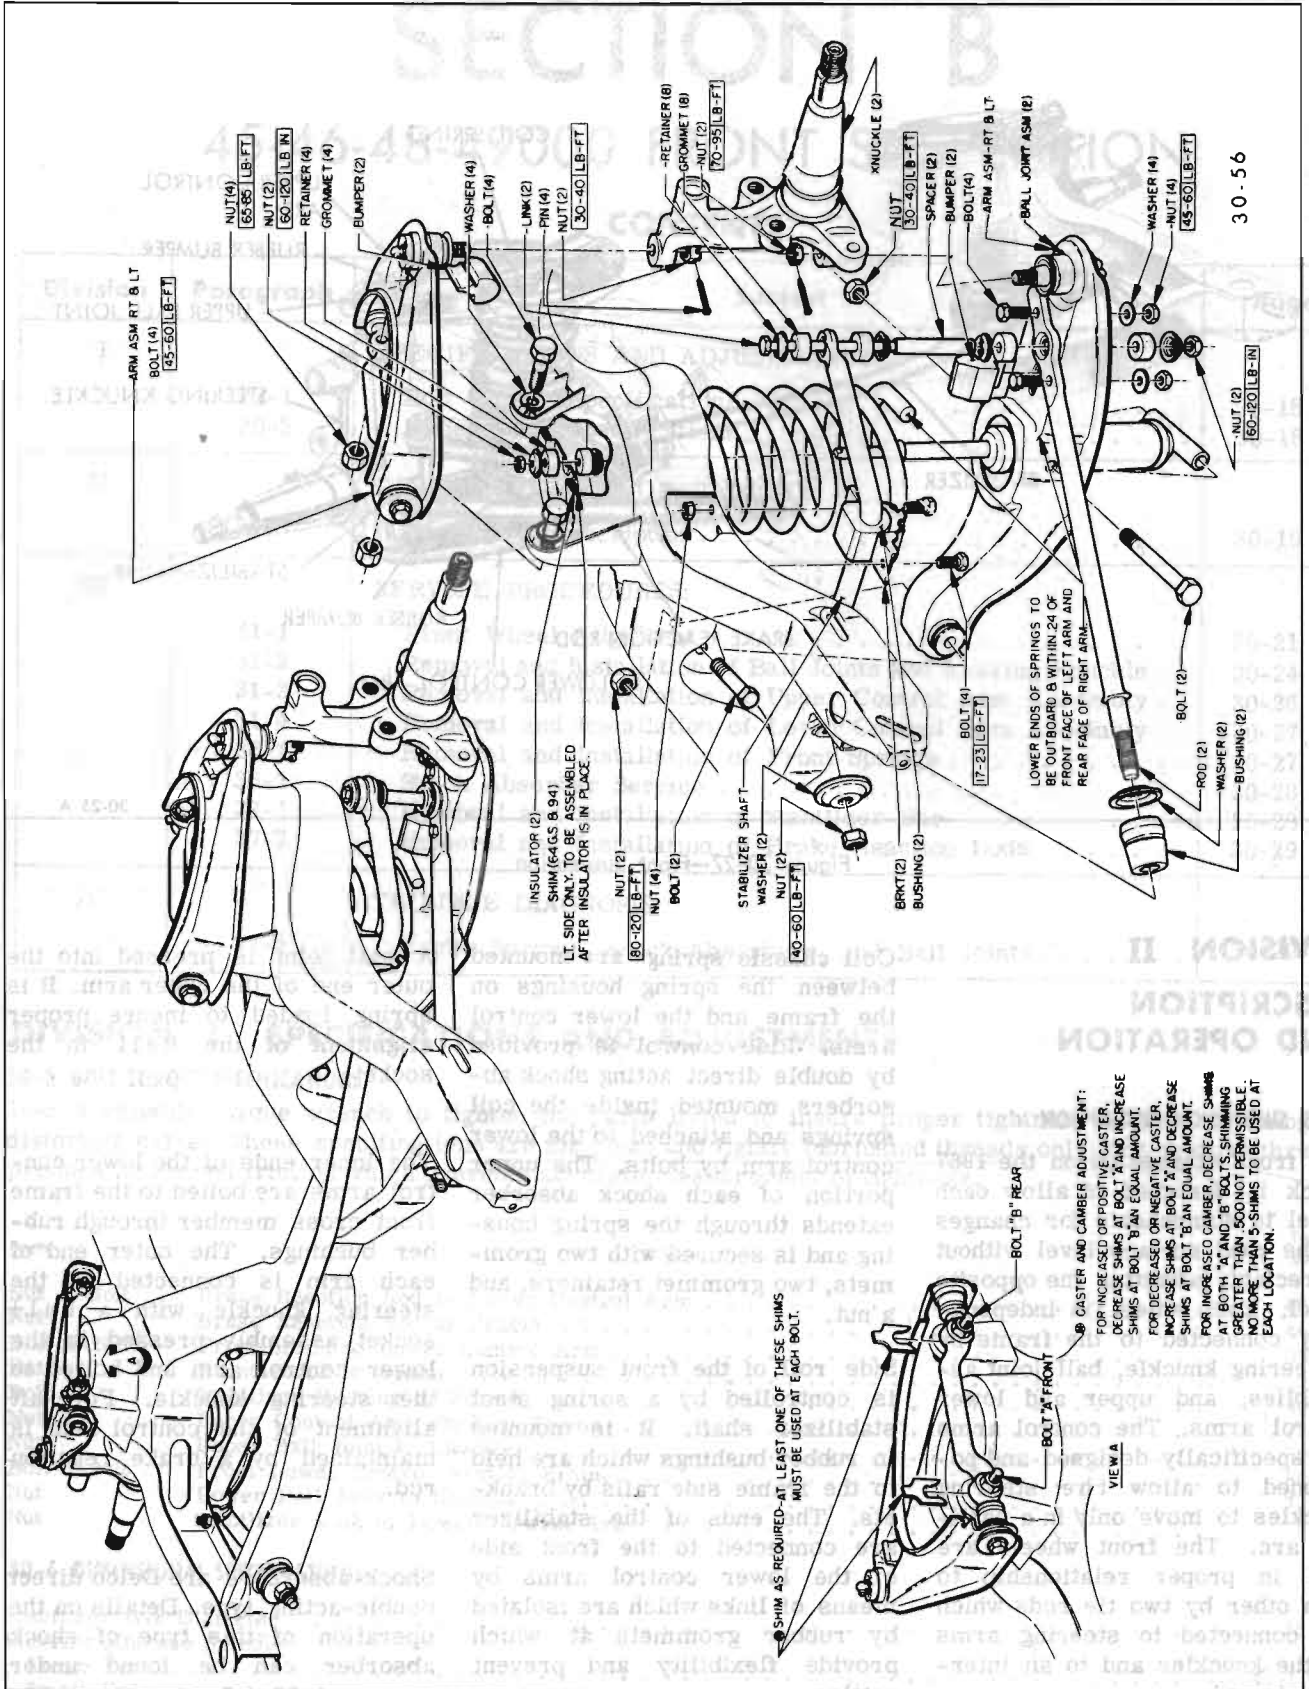

30.56

Figure 30-28—Front Suspension Details

DIVISION III**SERVICE PROCEDURES****31-1 FRONT WHEEL ALIGNMENT**

Wheel alignment is the mechanics of adjusting the position of the front wheels in order to attain the least steering effort with a minimal amount of tire wear.

Correct alignment of the chassis is essential to proper alignment of front and rear wheels. Briefly, the essentials are that the frame must be square in plan view within specified limits, reasonably level and the upper and lower control arms must be at correct location in respect to the front cross member. All bushings, ball joints and bolts must be of proper torque and in usable condition.

Wheel and tire balance has an important effect on steering and tire wear. If wheels and tires are out of balance, "shimmy" or "tramp" may develop or tires may wear unevenly and give the erroneous impression that the wheels are not in proper alignment. For this reason, the wheel and tire assemblies should be known to be in proper balance before assuming that wheels are out of alignment.

Close limits on caster, front wheel camber, and theoretical king pin inclination are beneficial to car handling, but require only reasonable accuracy to provide normal tire life. With the type of front suspension used, the toe-in adjustment is much more important than caster and camber are as far as tire wear is concerned.

Caster and camber adjustments need not be considered unless visual inspection shows these settings to be out, or unless the car gives poor handling on the road.

In the majority of cases, services consisting of inflating tires to specified pressure and interchanging tires at recommended intervals, balancing all wheels and tires, adjusting steering gear and setting toe-in correctly will provide more improvement in car handling and tire wear than will front end alignment adjustments.

The correct use of accurate front end alignment equipment is essential to determine whether front suspension parts have been damaged by shock or accident, and to obtain correct alignment settings after new parts have been installed.

a. Inspection Before Checking Front Wheel Alignment

Before making any adjustment affecting caster, camber, toe-in, theoretical king pin inclination, or steering geometry, the following checks and inspections must be made to insure correctness of alignment equipment readings and alignment adjustments.

1. Front tires should have approximately the same wear and all tires must be inflated to specified pressures (par. 100-1).
2. Check front wheel bearings for looseness and adjust if necessary (par. 100-4).
3. Check for run-out of wheels and tires.
4. Check wheels and tires for balance and correct if out-of-balance (par. 100-3).
5. Check for looseness at ball joints and tie rod ends; if found excessive, it must be corrected before alignment readings will have any value.
6. Check shock absorber action and correct if necessary.
7. Check trim height; if out of limits, correct with shims or replace spring.

CAUTION: Consideration must be given the optional equipment on the car, undercoating, dirt, etc.

Good judgment should be exercised before replacing a spring when car trim height is only slightly out of limits. Spring replacement under conditions of excessive weight as mentioned above will accomplish little and must be accompanied by shimming to obtain satisfactory results. Front shims are available through Buick Parts Warehouses under Group 7.425. Rear shims are available under Group 7.545. Refer to paragraph 37-2 for front springs and GROUP 40 for rear springs.

8. It is advisable to check the condition and accuracy of any equipment being used to check front end alignment and to make certain that instructions of the manufacturer are thoroughly understood.

b. Checking Caster and Camber Settings

Since caster and camber are both adjusted by shimming in the same locations, both of these settings must be checked before changing either setting.

CAUTION: Regardless of equipment used to check caster and camber, car must be on level surface both transversely and fore and aft.

Vehicle should be at curb or free height when an alignment operation is performed. All excess equipment, such as tool boxes, fishing or golfing equipment, should be removed from the vehicle.

Vehicle trim height is not to be considered when aligning the front wheels, other than the vehicle should be at free standing height. However, if a customer complains of his vehicle being low at one corner, requiring the replacement of a spring, an operation outside

the realm of front end alignment should be performed first, and then followed by an alignment operation.

When equipment is used which bears against the tire or wheel rim to obtain readings, it is very essential that the tires or wheels be checked for run-out.

Caster and camber readings must be taken at points which have no run-out or which lie in the same plane. Caster and camber should be within limits shown in Figure 30-30. Note that the caster angles at both front wheels need not be exactly the same but must be within 1/2 degree of each other. Likewise, the camber angles on both sides must be within 1/2 degree of each other. If caster and camber are not within the specified limits, adjust in the following manner.

c. Caster and Camber Adjustment

For caster and camber adjustment purposes, use the following guide:

1. To increase camber only - (More positive) Remove an equal amount of shims from front and rear bolt.
2. To decrease camber only - (Less positive) Add an equal amount of shims to front and rear bolt.
3. To increase caster only - (More positive) Remove an amount of shims from front bolt and add an equal amount of shims at rear bolt.
4. To decrease caster only - (Less positive) Add an amount of shims at the front bolt and remove an equal amount of shims from the rear bolt.
5. To increase caster and camber at the same time - remove an amount of shims at front bolt only.
6. To decrease caster and camber at the same time - add an

amount of shims at front bolt only.

The following guide lines will help you select and correctly shim with minimum effort. Shim thickness limit for any one stack is .600 of an inch.

Shims are available in .030", .060", .100" and .200" thickness.

By adding a pack of shims .090" thick at both sides, camber will be increased by 1/2 degree.

By adding a .030" shim on one bolt and removing a .030" shim from the other, caster will change 3/8 degree.

Torque control arm shaft nuts to: 65-85 lb. ft. on 45-46-48-49000 Series.

It is imperative that these torque specifications be closely adhered to.

d. Checking Theoretical Kingpin Inclination

CAUTION: When checking theoretical king pin inclination, car must be on a level surface, both transversely and fore and aft.

With camber known to be within specified limits, theoretical king pin inclination should check within specified limits given in Figure 30-30.

If camber is incorrect beyond limits of adjustment and theoretical king pin inclination is correct, or nearly so, a bent steering knuckle is indicated.

There is no adjustment for theoretical king pin inclination as this factor depends on the accuracy of the front suspension parts. Distorted parts should be replaced with new parts.

CAUTION: The practice of heating and bending front suspension parts to correct errors must be avoided as this may produce soft spots in the metal

in which fatigue and breakage may develop in service.

e. Checking and Adjusting Toe-In








CAUTION: Car must be at normal curb weight and running height. Bounce front end and allow it to settle to running height. Steering gear and front wheel bearings must be properly adjusted with no looseness at tie rod ends. The car should be moved forward one complete revolution of the wheels before the toe-in check and adjustment are started and the car should never be moved backward while making the check and adjustment.

1. Turn steering wheel to straight ahead position, with front wheels in same position.
2. Measure the horizontal distance from the near edge of front boss of lower control arm shaft to the front edge of brake backing plate, on each side. Adjust tie rods, if necessary, to make measurements equal on both sides.
3. Using a suitable toe-in gauge, measure the distance between outside walls of tires at the front at a height approximately horizontal to floor and through the centerline of the wheel assembly. See Figure 30-30.

NOTE: An accurate check also can be made by raising and rotating front wheels to scribe a fine line near the center of each tire, then, with tires on the floor and front end at running height, measure between scribed lines with a suitable trammel.

4. Roll the car forward until measuring points on tires are approximately 180° from point used in Step 3 above.

The measurement at the front should be 7/32" to 5/16" less than the measurement at the rear.

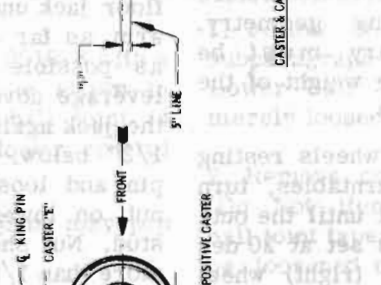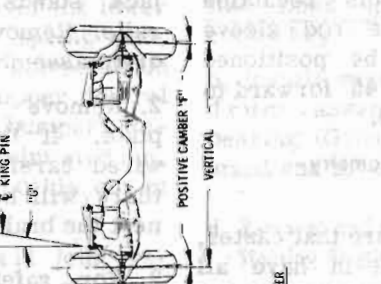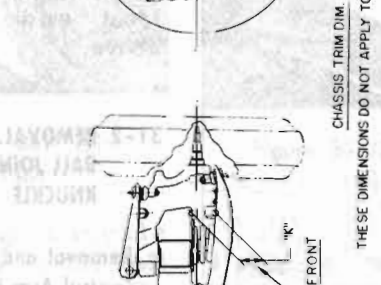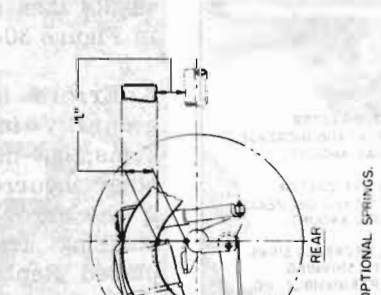

THESE DIMENSIONS DO NOT APPLY TO OPTIONAL SPRINGS.

SERIES	FULL TURN INNER WHEEL	FULL TURN OUTER WHEEL	WATER WHEEL SPINLE WITH PEEK WHEEL AT 90°	CASTER °	CAMBER °	STEERING AXIS ANGLE °	TOE IN HEIGHT	CHASSIS TRIM DIM.		REAR
								DESIGN	ACTUAL	
45007	37° 15'	28° 40'	18° 5'	0° POS.	0° 15' POS.	10° 45' AT 10° CAMBER	2.51	4.42	3.90	4.18
45007	37° 15'	28° 40'	18° 5'	0° POS.	0° 15' POS.	10° 45' AT 10° CAMBER	2.71	4.27	3.92	4.18
45007	37° 15'	28° 40'	18° 5'	0° POS.	0° 15' POS.	10° 45' AT 10° CAMBER	2.71	4.27	3.90	4.18
45007	37° 15'	28° 40'	18° 5'	0° POS.	0° 15' POS.	10° 45' AT 10° CAMBER	2.08	4.01	3.47	4.52

- LEFT AND RIGHT WHEEL ANGRITS TO BE WITHIN 10° 30' OF EACH OTHER.
- CURB WELCH T. I. CLOSURE FULL TANK GAS, OIL, WATER, AND SPARE TIRE.
- CURB WEIGHT TRAILOR. FIVE CAL. DUTY RATED GAS. SUBTRACT .10 FROM FRONT TRIM DIMENSIONS.
- NORMAL LOAD TRIM DIMENSIONS INTERPOLATED WITH 4 PASSENGER LOAD, 2 PASSENGERS IN FRONT SEAT, 2 PASSENGERS IN REAR SEAT, 1500 POUNDS PER PASSENGER.
- NORMAL LOAD TRIM DIMENSIONS INTERPOLATED WITH 3 PASSENGER LOAD, 2 PASSENGERS IN FRONT SEAT, 1 PASSENGER IN REAR SEAT, 1150 POUNDS PER PASSENGER.

Figure 30-30—Front Wheel Alignment and Chassis Trim Chart - 45-46-48-49000 Series

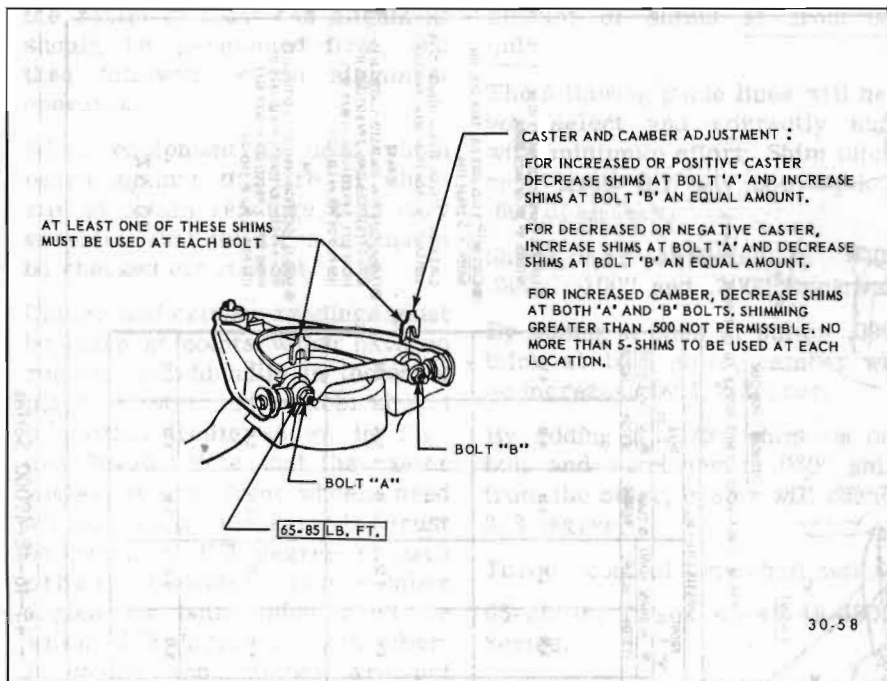


Figure 30-31—Upper Control Arm Shimming Locations

5. If toe-in is not within specified limits, loosen clamp bolts and turn adjusting sleeves at tie rod ends as required. Decrease toe-in by turning left sleeve in same direction as wheel rotates moving forward and turn right sleeve in opposite direction. Increase toe-in by turning both sleeves in opposite direction.

CAUTION: Left and right adjusting sleeves must be turned exactly the same amount but in opposite directions when changing toe-in, in order to maintain front wheels in straight ahead position when steering wheel is in straight ahead position.

6. After correct toe-in is secured, tighten clamp bolts securely.

CAUTION: The steering knuckle and steering arm "rock" or tilt as front wheel rises and falls. Therefore, it is of vital importance to center the travel of the inner tie rod joint, and then position the bottom face of

tie rod end parallel with machined surface at outer end of steering arm when tie rod length is adjusted. Severe damage and possible failure can result unless this precaution is observed. Tie rod sleeve clamps must be positioned straight down to 45° forward to provide clearance.

f. Checking Steering Geometry (Turning Angles)

CAUTION: Be sure that caster, camber, and toe-in have all been properly corrected before checking steering geometry. Steering geometry must be checked with the weight of the car on the wheels.

1. With the front wheels resting on full floating turntables, turn wheels to the right until the outside (left) wheel is set at 20 degrees. The inside (right) wheel should then set at the angle specified in Figure 30-30.

2. Repeat this test by turning front wheels to the left until the outside (right) wheel sets at 20

degrees; the inside (left) wheel should then set at angle specified in Figure 30-30.

3. Errors in steering geometry generally indicate bent steering arms, but may also be caused by other incorrect front end factors. If the error is caused by a bent steering arm, it must be replaced. Replacement of such parts must be followed by a complete front end check as described above.

31-2 REMOVAL AND INSTALLATION OF BALL JOINTS AND STEERING KNUCKLE

a. Removal and Installation of Upper Control Arm Ball Joint Assembly

The upper control arm and ball joint assembly is serviced as a complete unit. See paragraph 31-3 for upper control arm removal and installation.

b. Lower Ball Joint Removal

1. Raise front of car and place jack stands under frame side rails. Remove wheel with hub and drum assembly.

2. Remove the brake backing plate. If the backing plate is wired carefully out of the way, there will be no need to disconnect the brake hose.

3. For safety's sake, place a floor jack under the lower control arm as far outboard on the arm as possible to gain maximum leverage advantage. Do not place the jack against the arm but about 1/2" below. Now remove cotter pin and loosen (do not remove) nut on lower ball joint tapered stud. Nut should be loosened not more than 1/8".

WARNING: If jack is not used and nut is removed, injury could result since heavily compressed chassis spring will be completely released.



Figure 30-32—Lower Ball Joint Remover in Place

4. Rap the steering knuckle sharply in the area of the ball stud to allow the force of the chassis spring to disengage the tapered ball stud from the knuckle.

NOTE: It is sometimes helpful to wedge a block of wood under the upper control arm to provide a solid stop so the lower ball stud can be loosened with a more solid hammer rap.

5. Place the jack under the lower control arm at the spring seat. Raise the jack until compression is relieved on the upper control arm rubber rebound bumper. Remove the lower ball joint stud nut. Move the steering knuckle out of the way.

6. Install lower ball joint remover and installer as shown in Figure 30-32.

7. Tighten Detail J-9519-8 with a socket and handle as shown in Figure 30-33 until ball joint is forced out of the lower control arm.

CAUTION: Ball joint may pop out suddenly.

c. Lower Ball Joint Installation

1. Position ball joint in lower control arm and install Tool J-9519 as shown in Figure 30-34.

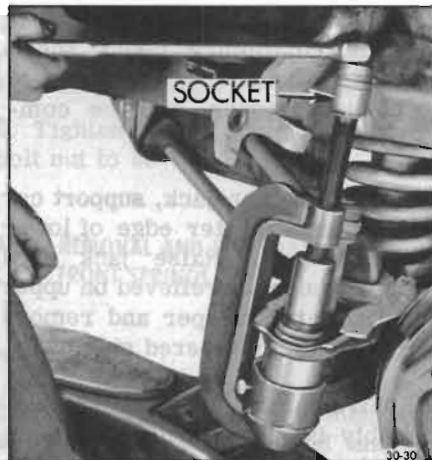


Figure 30-33—Removing Lower Ball Joint

2. With a suitable socket and handle, force the ball joint into the lower control arm until it is fully seated.

3. Turn the stud so the cotter key hole is fore and aft.

4. Position the tapered stud in the knuckle and install nut. Tighten the nut to 70-95 lb. ft. Do not loosen nut to align cotter pin holes. Tighten nut to next slot that lines up with hole. Install cotter key.

5. Install wheel with hub and drum assembly. Adjust wheel bearing (Group 100). Remove car stand and lower car.

d. Removal and Installation of Steering Knuckle

1. Follow Steps 1 through 4 of subparagraph b., Removal of the Lower Ball Joint. Be certain to merely loosen the nut.

2. Remove cotter pin and loosen (Do Not Remove) nut on upper ball joint tapered stud. Nut should be loosened not more than 1/8".

3. Rap steering knuckle in area of stud on both upper and lower ball joints to separate studs from knuckle. Nuts that were previously loosened still hold upper

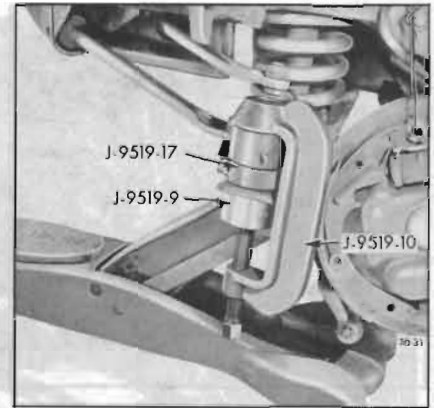


Figure 30-34—Lower Ball Joint Installer in Place

and lower control arms to knuckle.

4. Make certain that the lower control arm is adequately supported by a jack on its outer extremities to prevent any downward travel of the lower control arm when removing ball joint nut (it may be necessary to actually raise the lower control arm slightly to remove force of the knuckle against the nut). Remove the nut and raise knuckle off tapered stud.

5. The upper ball joint is already loosened from the knuckle, and with no spring force to interfere, it is now possible to remove the nut from the tapered stud and thus remove the knuckle.

6. To replace knuckle, wipe stud of upper ball joint and tapered hole in knuckle clean. Assemble to knuckle with cotter pin hole fore and aft, torque nut to 35 lb. ft. Do not loosen nut to align cotter pin holes. Tighten nut to next slot that lines up with hole. Install cotter pin.

7. Wipe lower ball joint stud and tapered hole in knuckle clean and assemble to knuckle as outlined in installation Steps 3 through 5 subparagraph c, preceding.

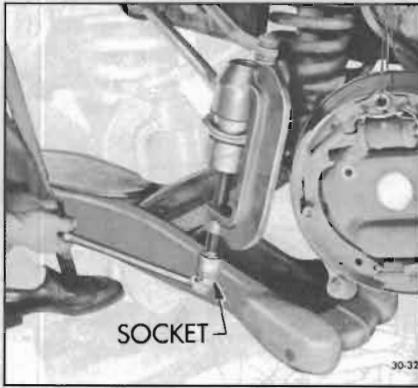


Figure 30-35—Installing Lower Ball Joint

31-3 REMOVAL AND INSTALLATION OF UPPER CONTROL ARM ASSEMBLY

a. Removal

1. Raise car with jack under frame. Remove wheel and tire.
2. Remove cotter pin from castellated nut on upper ball joint tapered stud.
3. Loosen, but do not remove nut. Force of chassis spring will be tending to disengage ball joint tapered stud from steering knuckle. Rap knuckle sharply in area of tapered stud to disengage stud from knuckle. See Figure 30-36.

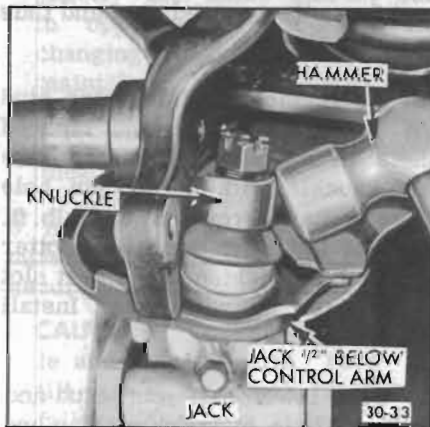


Figure 30-36—Separating Steering Knuckle from Ball Joint

WARNING: If ball stud nut is removed, injury could result since heavily compressed chassis spring will be completely released.

4. With another jack, support car weight under outer edge of lower control arm. Raise jack until compression is relieved on upper control arm bumper and remove from ball joint tapered stud.
5. Wire brake and knuckle assembly in place to prevent damage to the brake hose, and lift upper control arm from knuckle.
6. Remove the upper control arm shaft to bracket nuts, carefully noting the number, location, and thickness of adjusting shims between the shaft and frame bracket. Remove the control arm assembly.
7. The upper control arm is serviced only as an assembly. Therefore, if arm is bent or distorted, bushings worn, or control arm shaft is damaged in any way, the entire assembly must be replaced.

b. Installation

1. Assemble upper control arm and shaft assembly to bracket, making certain the number, thickness and location of adjusting shims between shaft and bracket are correct. Torque shaft to bracket nuts to 75 lb. ft. Those bolts may be torqued from within the engine compartment through the use of a standard 11/16"-1/2" drive socket and J-1313 Torque Wrench or its equivalent.
2. Assemble tapered stud to knuckle with cotter pin holes fore and aft. Install castellated nut. Torque to 35 lb. ft. Do not loosen nut to align cotter pin holes. Tighten nut to next slot that lines up with hole. Install cotter pin.
3. Install wheel. Check and adjust front end alignment if necessary. When working in the area of the front upper control arm, make certain that the rubber water deflectors on fender skirt are securely attached in their original positions when the work is completed. If reasonable care is exercised in removing the fasteners

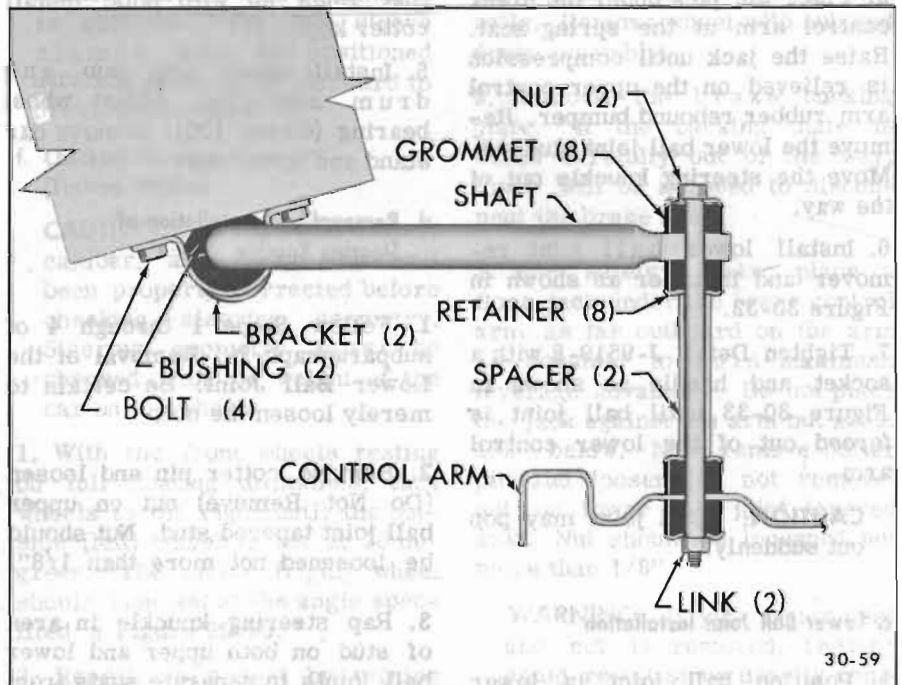


Figure 30-37—Stabilizer Link Installation

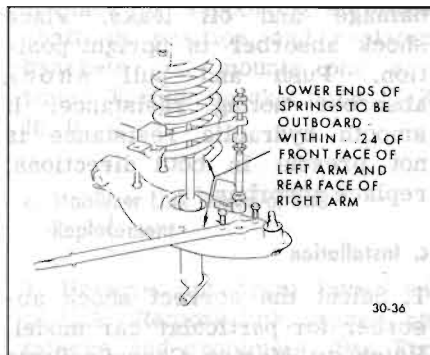


Figure 30-38—Front Coil Spring Orientation

for these rubber deflectors, they may be satisfactorily reused.

4. Lubricate the ball joint with a long-effectiveness grease equivalent to Buick Specification No. 742.

31-4 REMOVAL AND INSTALLATION OF LOWER CONTROL ARM ASSEMBLY

a. Removal

1. Remove coil spring, reaction rod, and stabilizer link according to outline in paragraph 33-1.

2. Remove the lock nut attaching the control arm to the frame.

b. Installation

1. Install arm with the bolt head to the front of car.



Figure 30-39—Tool J-9552

2. Reinstall coil spring, reaction rod, and stabilizer link as outlined in paragraph 33-1.

3. Tighten control arm attaching bolt nut to 80-120 lb. ft.

33-1 REMOVAL AND INSTALLATION OF FRONT SPRINGS

a. Removal

1. Raise front of car and support solidly with a car stand under the frame side rail on the side where the spring removal is to be performed.

2. Remove wheel, and hub and drum assembly.

3. Remove shock absorber according to outline in paragraph 36-1.

4. Remove the front stabilizer rod link from lower control arm.

5. Disconnect brake reaction rod from lower control arm but leave attached to front frame cross member.

6. Remove control arm bumper.

7. As a safety precaution place a floor jack under the lower control arm as far outboard as possible to gain maximum leverage advantage.

Do not place the jack against the arm, but about 1/2 inch below. Now remove the cotter pin and LOOSEN, DO NOT REMOVE the nut on the lower ball joint tapered stud. The nut should be loosened not more than 1/8".

8. Rap the steering knuckle in the area of the stud to separate the stud from the knuckle. See Figure 30-36.

Raise the jack against the control arm to relieve pressure on the nut, remove the nut and separate the steering knuckle from the tapered stud.

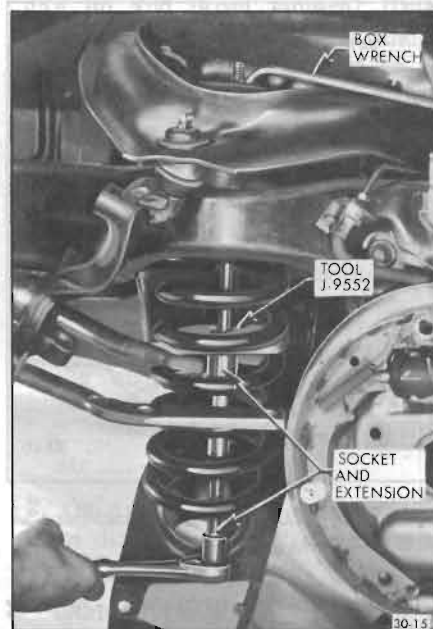


Figure 30-40—Compressing Front Spring with Tool J-9552

9. Carefully lower the jack supporting the lower control arm to release the spring. With the jack all the way down to the floor it still may be necessary to pry the spring off its seat on the

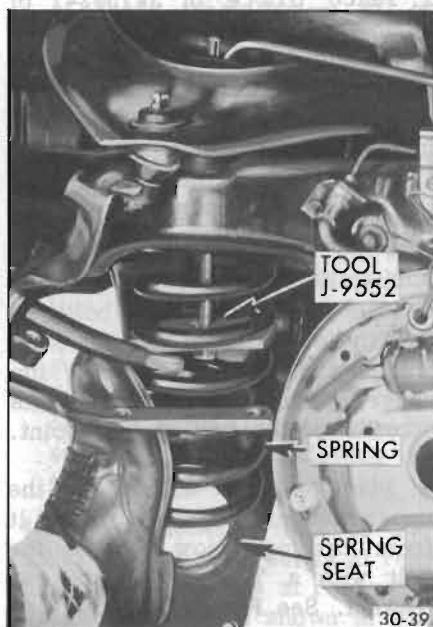


Figure 30-41—Pushing Spring onto Lower Control Arm Seat

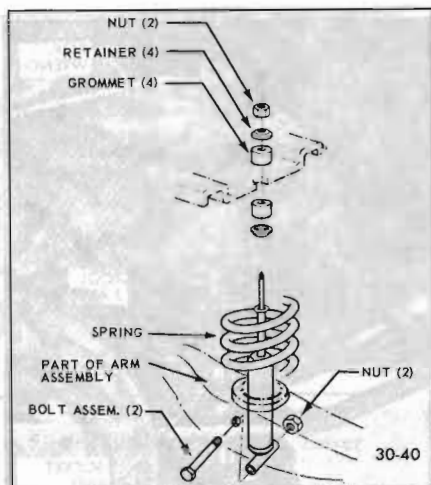


Figure 30-42—Shock Absorber Mounting Details

lower control arm with a long pry bar. Caution should be exercised in handling this loaded spring while still attached.

b. Installation

1. Position spring in frame upper spring seat. When assembled, the end of the lower coil must be outboard within 1/4 inch of the front face of the left arm and rear face of the right arm.

2. Place plate of J-7592-7 of spring installing Tool J-9552 between the 4th and 5th coil of the spring from the bottom. Slip in plate will fit contour of the coil. Install bolt to plate and place threaded end of the bolt through the shock spring hole in the frame spring seat.

3. Install special Nut J-9552-2 on the upper end of the bolts so that the shoulder of the nut protrudes through the hole in the upper spring seat to protect the threads of the bolt at this point.

4. Place a box wrench on the upper nut of the tool to keep it from turning. Now tighten the bolt with a 7/8" socket and extension. See Figure 30-40.

5. Tighten the bolt, compressing the spring, until at least 1-3/4" to 2" of the rod protrudes through

the upper nut of the tool. At this point the spring is usually compressed sufficiently.

6. Force the spring on its seat in the lower control arm as shown in Figure 30-41. Remove tool.

7. With the spring in position raise the lower control arm with the jack and attach the lower ball joint tapered stud to the knuckle. Make certain that the rubber dust cover is in place on the ball joint. Torque the nut to 70-95 lb. ft. Do not loosen nut to align cotter pin holes. Tighten nut to next slot that lines up with hole. Install the cotter pin.

8. Install shock absorber. Torque upper nut to 10 lb. ft. and lower bolt nut, to 30-40 lb. ft.

9. Attach brake reaction rod and compression bumper to the lower control arm. Torque the nuts to 45-60 lb. ft.

NOTE: Never use standard bolts, nuts or washers at this location. If replacement parts are needed a package, (Group 6.171), contains the two special nuts and two special washers necessary for this installation.

10. Reinstall stabilizer link and grommets. See Figure 30-37.

11. Replace wheel hub and drum assembly.

12. Remove the car stand and recheck and adjust toe-in as necessary.

36-1 SHOCK ABSORBER SERVICE

a. Removal

1. Remove upper shock absorber attaching nut, grommet retainer and grommet.

2. Remove the lower retaining bolt and nut. Lower shock through lower control arm.

b. Inspection

Check shock absorber for visible

damage and oil leaks. Place shock absorber in upright position. Push and pull shock absorber noting resistance. If smooth hydraulic resistance is not present in both directions, replace absorber.

c. Installation

1. Select the correct shock absorber for particular car model. Refer to Master Chassis Parts Catalog for correct absorber.

Substitution of an incorrectly calibrated shock absorber will adversely effect car handling performance.

2. Assemble lower grommet retainer and grommet on shock stem. Extend shock and install through lower control arm.

3. Install stop, bolt and nut. Torque to 30-40 lb. ft.

4. Assemble top grommet, grommet retainer, and nut on stem. Torque to 5-10 lb. ft.

37-3 REMOVAL AND INSTALLATION OF STABILIZER BAR

a. Stabilizer Shaft, Removal and Replacement

Disconnect stabilizer links (subpar. c. following) and disconnect the two frame-to-shaft insulator mounts and brackets.

To install, position insulator mounts and brackets over shaft and connect bracket to frame.

Torque bracket bolts to 17-23 lb. ft. Connect stabilizer links, subparagraph c below. Do not lubricate insulator mounts.

b. Stabilizer Bracket and Insulator, Removal and Replacement

Stabilizer brackets should be replaced if damaged, and rubber insulator mounts replaced if deteriorated.

Replace by supporting stabilizer shaft in position and replacing brackets and mounts one at a time. Torque bracket bolts 17-23 lb. ft.

c. Stabilizer Link Removal and Replacement

1. Remove nut from lower end of link. Remove link, spacer, retainers and grommets. See Figure 30-37.

2. Inspect link and grommets.

3. Install grommets dry and use care to center the grommets in the seats on stabilizer shaft and hole in brake reaction rod. Also, center the retainers on grommets before tightening rod nut.

4. Tighten rod nut to 5-10 lb. ft.

37-2 REMOVAL AND INSTALLATION OF BRAKE REACTION RODS

a. Removal

1. Raise front of car.

2. Remove nut and washer at frame attachment.

3. Remove 2 bolts, nuts and washers at lower control arm, remove nut at bottom of stabilizer link and raise link upward and slide reaction rod out of bushing in frame.

b. Installation

1. Remove and replace old rubber bushing if worn.

2. Install washer with largest hole on brake reaction rod first, with concave side toward nut. Install rod through bushing in frame bracket. Install washer with smaller hole and with concave side toward bushings. Start nut, but do not tighten. Do not lubricate bushings.

3. Install two attaching nuts and bolts and washers to lower control arm. Torque 45-60 lb. ft.

4. Reposition stabilizer link; install lower grommet, retainer and nut and torque to 5-10 lb. ft.

5. Torque nut at frame end of brake reaction rod to 40-60 lb. ft.

NOTE: CASTER AND CAMBER MUST BE CHECKED AFTER REPLACEMENT OF BRAKE REACTION ROD.

NOTE: If there is any question concerning the serviceability of the brake reaction rod to lower control arm bolts, nuts or washers, install Group 6.171, which includes two special bolts, two special nuts and four special washers. Never use standard bolts, nuts or washers at this location.

DIVISION IV

TROUBLE DIAGNOSIS

37-2 FAULTY SPRINGS, SHOCK ABSORBERS, AND BALL JOINTS

a. Trim Height Checking Considerations

Optional equipment, undercoating, accumulated dirt, etc., change the car weight and must be considered when checking spring trim dimensions. Because of the many possible variations in loading due to optional equipment, it is not possible to give dimensions for all conditions; therefore, the spring trim dimensions following are for the standard car only, without optional equipment or undercoating and with car at curb weight. Curb weight includes gas, oil, water, and spare tire but no passengers.

Before measuring spring trim dimensions, bounce both ends of

car up and down several times to make sure there is no bind in suspension members, and to let springs take a natural position.

b. Measuring Trim Height

1. On a new car, the front spring trim dimension "K" should be as shown in Figure 30-30.

NOTE: On a car having service miles the trim height may be less due to normal setting of bushings, dirt accumulation, etc.

2. On a new car, the rear spring trim dimension "L" should be as shown in Figure 30-30.

NOTE: On a car having service miles the trim height may be less due to normal setting of bushings, dirt accumulation, etc.

3. When checking side to side differences in trim height at the front, take measurements at the front wheel house openings as shown in Figure 30-30.

NOTE: If a variation exists in trim height from side to side at front, installation of one shim to the low side will increase the height of that side by approximately 1/2" and the opposite side by approx. 1/4". If the front end of the car is low, adding one shim to both sides will increase the trim height by approx. 3/4". Only one shim can be used at each front location. If side to side variation is in excess of one inch, check suspension components for damage, excessive wear, or incorrect spring installation. See subparagraph c following for front shim installation.

4. When checking side to side differences in trim height at rear, take measurements at rear wheel house openings as shown in Figure 30-43. If shimming is required, see subparagraph c following.

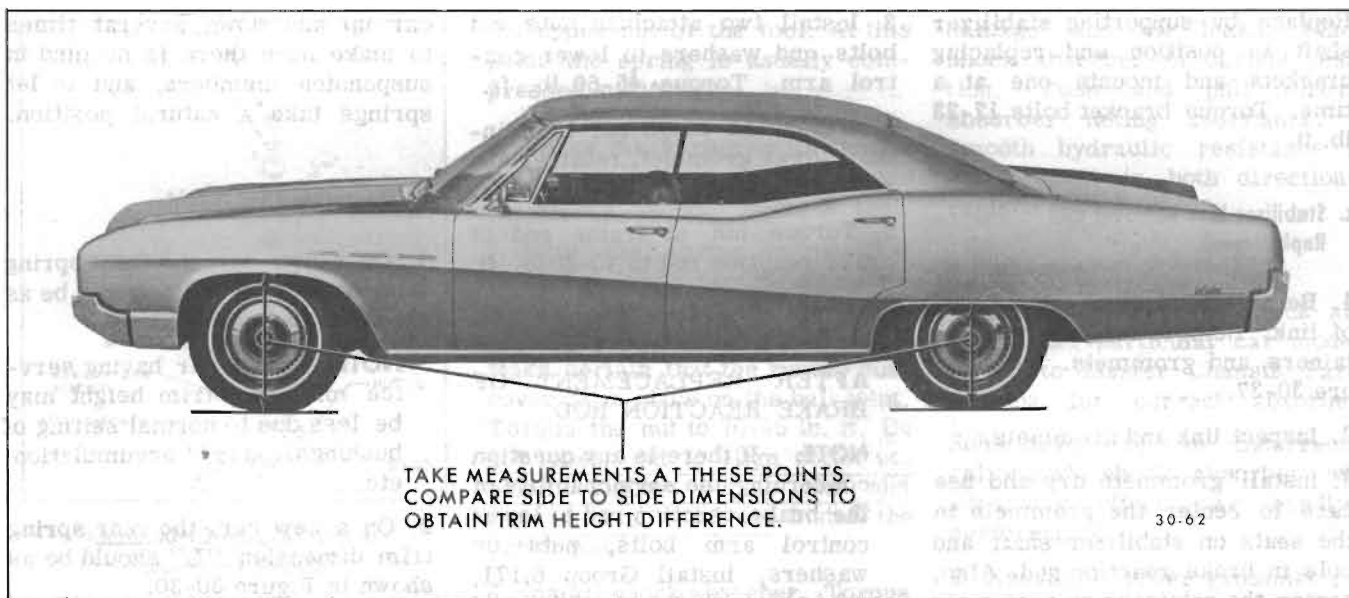


Figure 30-43—Trim Height Side-To-Side Checking Locations

c. Installation of Front Spring Shim

To correct variations in trim height, front spring shims may be ordered from the Parts Department under Group 7.425.

1. Remove front spring from car as described in paragraph 33-1.
2. Place shim at top of spring as shown in Figure 30-44.
3. Install spring in car per paragraph 33-1.

d. Weak and Non-Operative Shock Absorbers

Many shock absorbers have been replaced and returned to the factory with the report that they were weak or leaking oil. When tested with special factory equipment very few of these replaced units have been found weak, leaking oil or otherwise below standard in operation. This indicates that these shock absorbers were needlessly replaced in an attempt to improve riding conditions that were actually standard, or that erroneous methods were used in judging the operating condition of the units.

Leaking shocks are apparently diagnosed by observing a light oil film on or around the shock.

The shock absorber seal is designed to allow for lubrication of the piston rod, which under normal conditions, causes a light oil film to accumulate on the shock. This does not affect shock operation nor is replacement necessary as all Delco shocks contain an added fluid reserve for this purpose.

A leaking shock absorber is easily spotted as there will be evidence of fluid droplets on or around the shock. Before replacing any shock absorber, verify that the oil present on the shocks is not from some other chassis component.

Before attempting to test shock absorbers make sure that all attaching bolts and nuts are tight. Tires should be uniformly inflated to specified pressure (Group 100). The chassis should be well lubricated to make sure that suspension parts are free moving.

Test each front and rear shock absorber in turn by quickly push-

ing down and then lifting up on the end of the car bumper closest to the unit being checked. Use the same amount of force on each test, and note the amount of resistance provided by the shock absorber on compression and rebound. A little practice on another car of the same model which has satisfactory ride control will aid in judging the amount of resistance that should exist. Both front shock absorbers should provide the same feeling of resistance as should both rear shock absorbers. Any noticeable variation between right and left shock absorbers indicates that one unit is not operating normally. Little or no resistance on compression or rebound indicates air in shock absorbers, internal leakage due to wear, or that the valve is held open by dirt. Excessive resistance indicates that bleeder hole in valve is plugged with dirt.

If there is any doubt about the action of a shock absorber after testing as described above, remove the unit from car. Mount it vertically in vise with safe jaws gripping the mounting firmly, then move the piston rod up and down



Figure 30-44—Installing Shim on Spring

by hand. There should be no free movement in this test. Lack of resistance to movement indicates air in the shock absorber, internal leakage due to wear, or that the valve is held open by dirt. A faulty shock absorber must be replaced as it cannot be disassembled for repairs. In the test given above, the amount of force that can be applied is not sufficient to open a valve against its spring

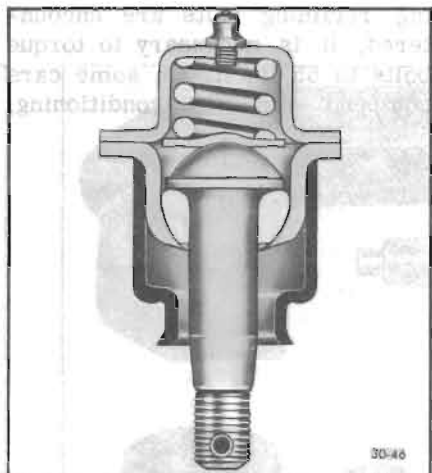


Figure 30-46—Upper Ball Joint Construction

pressure; therefore, this test only checks the flow of fluid through the valve bleeder hole as well as any leakage due to a valve being held open, or due to internal wear of piston and cylinder. Since it is unlikely that the valve springs will weaken in service, it may be assumed that the shock absorber action is normal, if it operates satisfactorily in the test given above.

e. Loose Ball Joints

The upper ball stud is spring-equipped and thus preloaded in its socket at all times. This minimizes looseness at this point and compensates for normal wear. If the upper stud has any perceptible lateral shake, or if it can be twisted in its socket with the fingers, the upper ball joint should be replaced.

The lower ball joint is not spring loaded but is held seated by the weight of the car. With the chassis spring load removed from the ball joint, this ball joint may show looseness. Such looseness is probably due to normal operating clearance.

1. Place jack under lower control arm as far outboard as possible

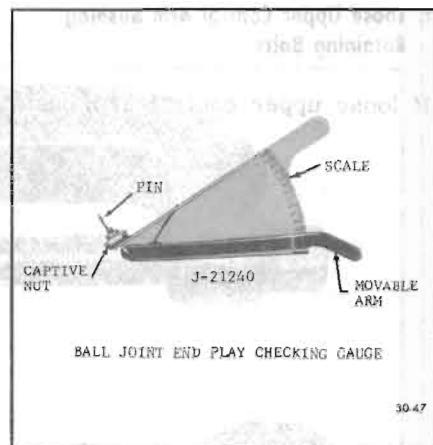


Figure 30-47—Ball Joint Checking Gauge J-21240

and still have access to the lower ball joint grease fitting. Be sure the upper control arm does not contact the rebound bumper when the car is raised. Raise car until front wheel clears the floor.

2. Remove lower ball joint grease fitting and install Gauge J-21240.

3. Place a pry bar between floor and tire and raise tire. This puts a load on the ball joint.

4. Repeat procedure several times and take maximum and minimum gauge readings under load and no load conditions.

5. Subtract minimum reading from maximum reading. If difference is more than .100", replace ball joint.

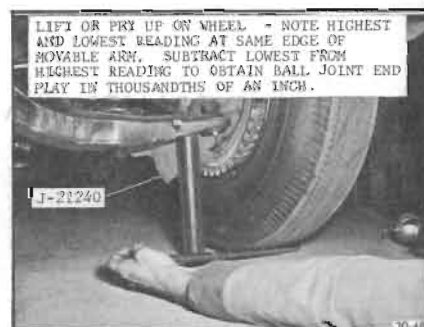


Figure 30-48—Ball Joint Checking Gauge Installed

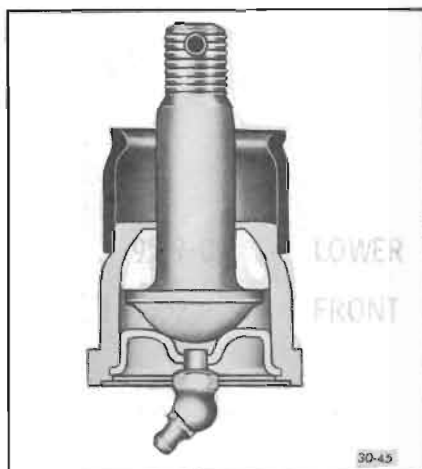


Figure 30-45—Lower Ball Joint Construction

f. Loose Upper Control Arm Bushing Retaining Bolts

If loose upper control arm bush-

ing retaining bolts are encountered, it is necessary to torque power brakes, etc. it will be necessary to remove the upper control arm per paragraph 31-3 to torque the bolts.

power brakes, etc. it will be necessary to remove the upper control arm per paragraph 31-3 to torque the bolts.

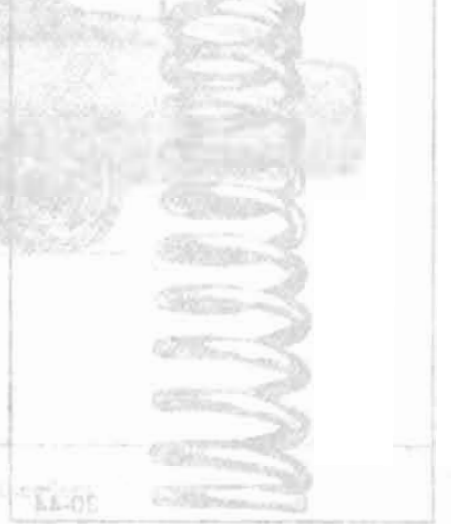


Figure 31-3-Upper Ball Joint Retaining Bolt

Figure 31-4-Coil Spring

and still have room to the lower ball joint. If the upper control arm bushing retaining bolt is loose, the upper control arm will not have enough spring to keep the wheel in the correct position. This will result in a loose ball joint. The ball joint is also a critical part of the suspension system. If the ball joint is loose, the wheel will not have enough support and the car will not handle properly. The ball joint is also a critical part of the suspension system. If the ball joint is loose, the wheel will not have enough support and the car will not handle properly.

pressure. Therefore, the ball joint checks the flow of fluid through the valve. If the ball joint is loose, the valve will not have enough pressure to keep the fluid from leaking out. This will result in a loose ball joint. The ball joint is also a critical part of the suspension system. If the ball joint is loose, the wheel will not have enough support and the car will not handle properly.

The ball joint is also a critical part of the suspension system. If the ball joint is loose, the wheel will not have enough support and the car will not handle properly. The ball joint is also a critical part of the suspension system. If the ball joint is loose, the wheel will not have enough support and the car will not handle properly.

A loose ball joint will result in a loose steering wheel. This will result in a loose steering wheel. A loose ball joint will result in a loose steering wheel. This will result in a loose steering wheel. A loose ball joint will result in a loose steering wheel. This will result in a loose steering wheel.

The ball joint is also a critical part of the suspension system. If the ball joint is loose, the wheel will not have enough support and the car will not handle properly. The ball joint is also a critical part of the suspension system. If the ball joint is loose, the wheel will not have enough support and the car will not handle properly.



Figure 31-5-Lower Ball Joint

Figure 31-6-Steering Knuckle



J-9552



J-9519-01

- J 9519-01 LOWER CONTROL BALL JOINT REMOVER AND REPLACER SET
- J 9552 FRONT COIL SPRING COMPRESSOR

Figure 30-49—Special Tools - Group 30