

# CONTROLLED COMBUSTION SYSTEM

## CONTENTS

| Division | Paragraph | Subject                                                                                              | Page |
|----------|-----------|------------------------------------------------------------------------------------------------------|------|
| I        | 67-1      | SPECIFICATIONS AND ADJUSTMENTS:<br>Controlled Combustion System Specifications . . . . .             | 67-2 |
| II       | 67-2      | DESCRIPTION AND OPERATION:<br>Description and Operation of Controlled<br>Combustion System . . . . . | 67-2 |
| III      | 67-3      | SERVICE PROCEDURES:<br>Removal and Replacement of C.C.S. Units . . . . .                             | 67-8 |
| IV       | 67-4      | TROUBLE DIAGNOSIS:<br>Testing Thermo Air Cleaner Operation . . . . .                                 | 67-8 |

## DIVISION I—SPECIFICATIONS AND ADJUSTMENTS

### 67-1 CONTROLLED COMBUSTION SYSTEM SPECIFICATIONS

|                                                      |            |
|------------------------------------------------------|------------|
| Carburetor Inlet Air Regulated Temperature . . . . . | 115° ± 20° |
| Idle Mixture Setting (Lean from Best Idle) . . . . . | 20 RPM     |
| Thermo Vacuum Switch Operating Temperature . . . . . | 220°       |
| Engine Thermostat Operating Temperature              |            |
| L-6 Engine . . . . .                                 | 195°       |
| V-8 Engine . . . . .                                 | 190°       |
| Idle Speed and Ignition Timing                       |            |

|                                             | Idle Speed | Ign. Timing     |
|---------------------------------------------|------------|-----------------|
| 250 Eng. - Manual Transmission . . . . .    | 700        | 0° or T.D.C.    |
| 250 Eng. - Automatic Transmission . . . . . | 500        | 4° B.T.D.C.     |
| 350 Eng. - Manual Transmission . . . . .    | 700        | 0° or T.D.C.    |
| 350 Eng. - Automatic Transmission . . . . . | 550        | 0° or T.D.C.    |
| 400 Eng. - Manual Transmission . . . . .    | 700        | 2-1/2° A.T.D.C. |
| 400 Eng. - Automatic Transmission . . . . . | 600        | 0° or T.D.C.    |
| 430 Eng. - Automatic Transmission . . . . . | 550        | 0° or T.D.C.    |

## DIVISION II

### DESCRIPTION AND OPERATION

#### 67-2 DESCRIPTION AND OPERATION OF CONTROLLED COMBUSTION SYSTEM

All 1968 cars must be capable of passing certain tests which measure the quantity of unburned impurities in the exhaust gases.

Federal law places a limit on the hydrocarbon and carbon monoxide emissions from the exhaust system. These Federal standards are the same as the California standards which have been in effect for the past two years. The purpose of this law is to keep the atmosphere cleaner, particularly in populous areas where these impurities add to the smog problem.

Basically, excessive exhaust emissions are caused by incomplete combustion of the air-fuel mixture in the cylinders.

The Buick solution to the emissions problem is the Controlled Combustion System (C.C.S.). This system, used along with engines designed for low emissions, involves retarded spark advance at lower engine speeds plus leaner

carburetor and choke calibrations. Most previous model Buicks had full vacuum spark advance at closed throttle. This greatly reduced the heat rejection to the coolant during idle, making radiator temperatures lower for more efficient air conditioning. However, with vacuum spark advance at idle, exhaust emissions are very high during idle and during closed throttle deceleration. Engineers have found that these emissions could be greatly reduced by retarding the idle advance to TDC. With TDC idle timing, the throttle must be opened slightly more to maintain the same idle speed. This gives better mixture distribution and less exhaust dilution, resulting in much more complete combustion.

All 1968 Buicks, therefore, have "ported" spark advance, with the vacuum take-off just above the throttle valve, so that there is no vacuum advance at closed throttle, but there is vacuum advance as soon as the throttle is opened slightly. To reduce emissions at idle and at lower engine speeds, all V-8 engines are timed at TDC and will not start to have centrifugal advance until about 1100 RPM; from 1100 RPM on up, the centrifugal advance curve will be similar to past model curves.

Because of the greater heat rejection to the coolant during idle with no vacuum spark advance, some engines are liable to overheat if allowed to idle for an extended period. For this reason, all upper series and 400 cu. in. automatic transmission engines have a thermo vacuum switch located in the coolant passage at the left front corner of the intake manifold. This vacuum switch has three nipples:

1. The nipple marked "MT" has a hose either directly to the intake manifold or to a tee which connects to the manifold.
2. The nipple marked "C" is

connected to the carburetor for a "ported" vacuum source.

3. The nipple marked "D" is connected to the distributor vacuum advance unit.

When engine coolant is at normal temperatures, the thermo vacuum switch is positioned internally to supply "ported" vacuum to the distributor. However, if coolant temperature should ever rise above 220°, the thermo vacuum switch will supply full intake manifold vacuum to the distributor, even at closed throttle. This will cause an idling engine to speed-up, resulting in improved fan and water pump action, beside reducing heat rejection to the coolant because of the 14 to 18 degrees spark advance.

The C.C.S. package includes leaner carburetor calibration at idle and part throttle plus leaner choke calibration. Since past model carburetion was as lean as possible consistent with good driveability with inlet air temperatures as low as -20°, this still leaner C.C.S. carburetion is only possible because of the heated air system that is also a part of the C.C.S. package. See Figure 67-1. With the heated air system operating, inlet air temperature is around 115° after the first few minutes of operation; this makes use of leaner (hot weather) calibration possible, and the car still responds and drives well in cold weather.

The heated air part of the C.C.S. consists of a heat stove, a steel heated-air pipe, a rubber adapter elbow and an air cleaner containing temperature control doors operated by vacuum through a temperature sensor.

The heat stove is a sheet metal cover, shaped to and bolted on with the left exhaust manifold. Air drawn in along the lower edge of the stove passes across the manifold surface, picking-up heat. The heated air is drawn out from

the upper center of the manifold, through the heated air pipe and rubber adapter elbow into the snorkel of the air cleaner.

The temperature control air cleaner is designed to mix this heated air with cold air from under the hood so that carburetor inlet air temperature averages about 115°. This mixing is done by two air doors, a cold air door and a hot air door, which move together so that when the cold air door is closed, the hot air door is open and vice versa. Most of the time, both doors will be partially open as required to control the temperature. When the underhood temperature reaches about 135°, the cold air door will open wide and the hot air door will close tight. See Figure 67-2. Obviously, if underhood temperatures rise above 135°, the air cleaner will no longer be able to control temperature and the inlet air temperature will rise with underhood temperature.

The temperature doors are moved by a diaphragm type vacuum motor. When there is no vacuum present in the motor, the diaphragm spring forces the cold air door open and the hot air door closed. Whenever the engine is running, the amount of vacuum present in the vacuum motor depends on the temperature sensor in the air cleaner which is located in the vacuum line between the intake manifold and the vacuum motor. In the sensor, a bi-metal temperature sensing spring starts to open a valve to bleed more air into the vacuum line whenever the temperature in the air cleaner rises above about 115°. Whenever the temperature falls below about 115°, the sensing spring starts to close the air bleed into the vacuum line, allowing more manifold vacuum to reach the vacuum motor. Whenever there is 9 inches or more of vacuum in the vacuum motor, the diaphragm spring is compressed, the cold



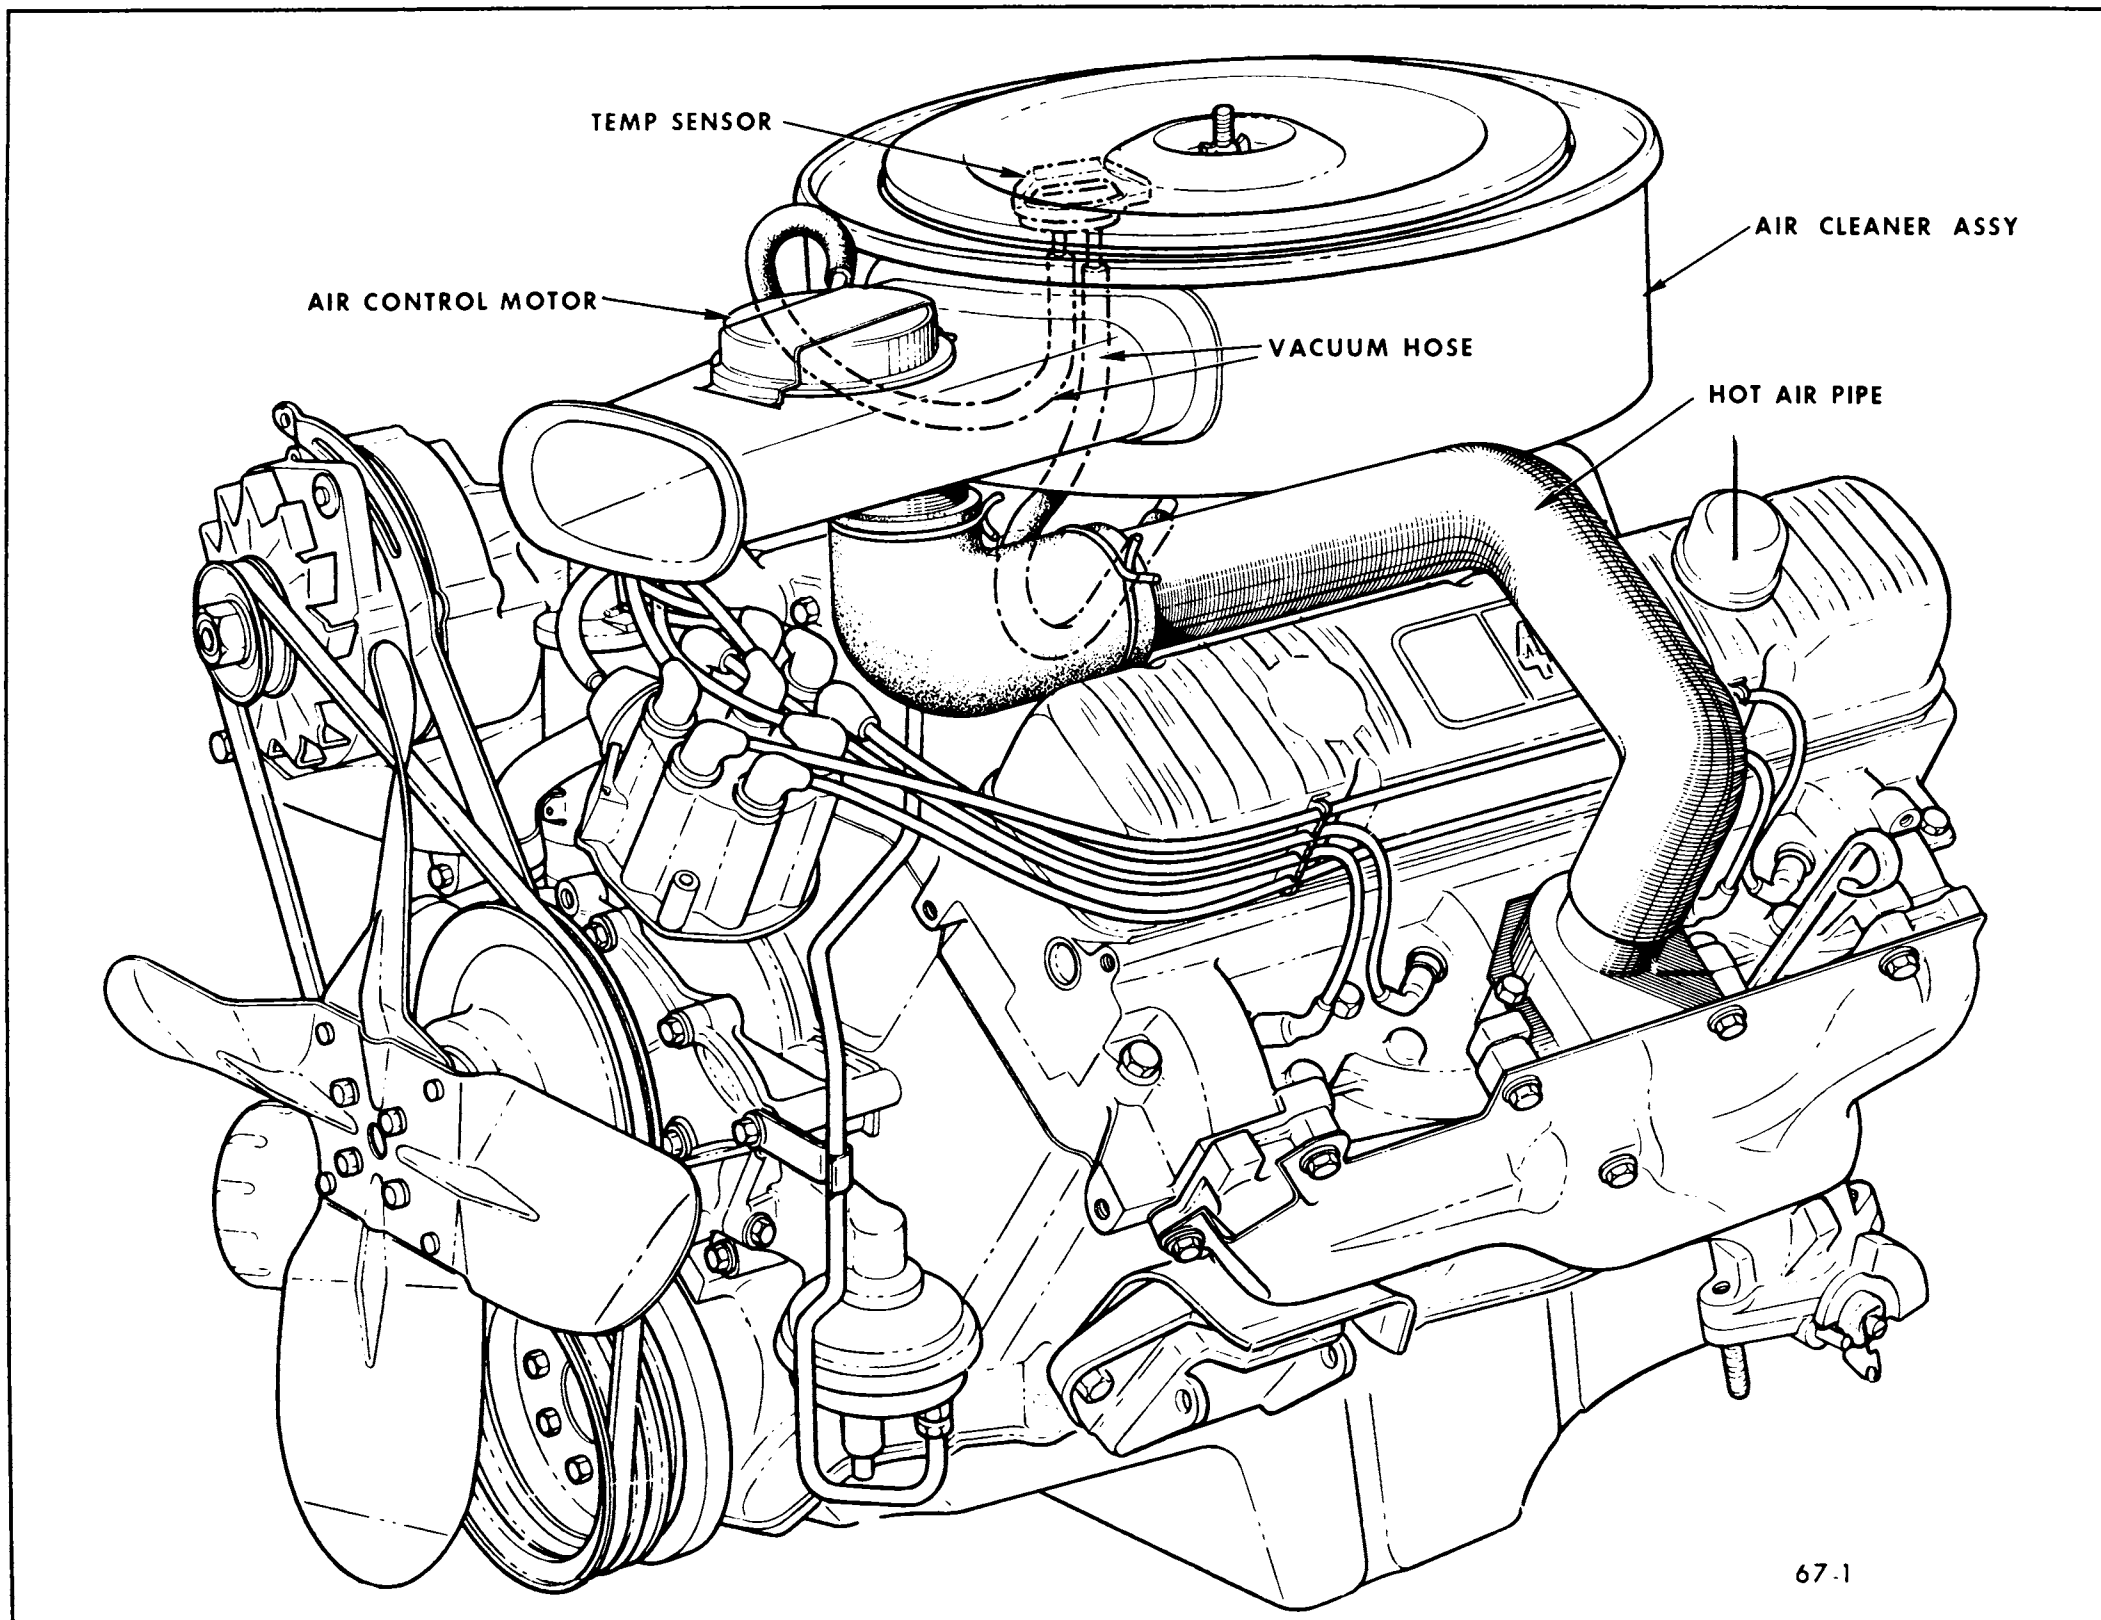


Figure 67-1—Heated Air System Installed

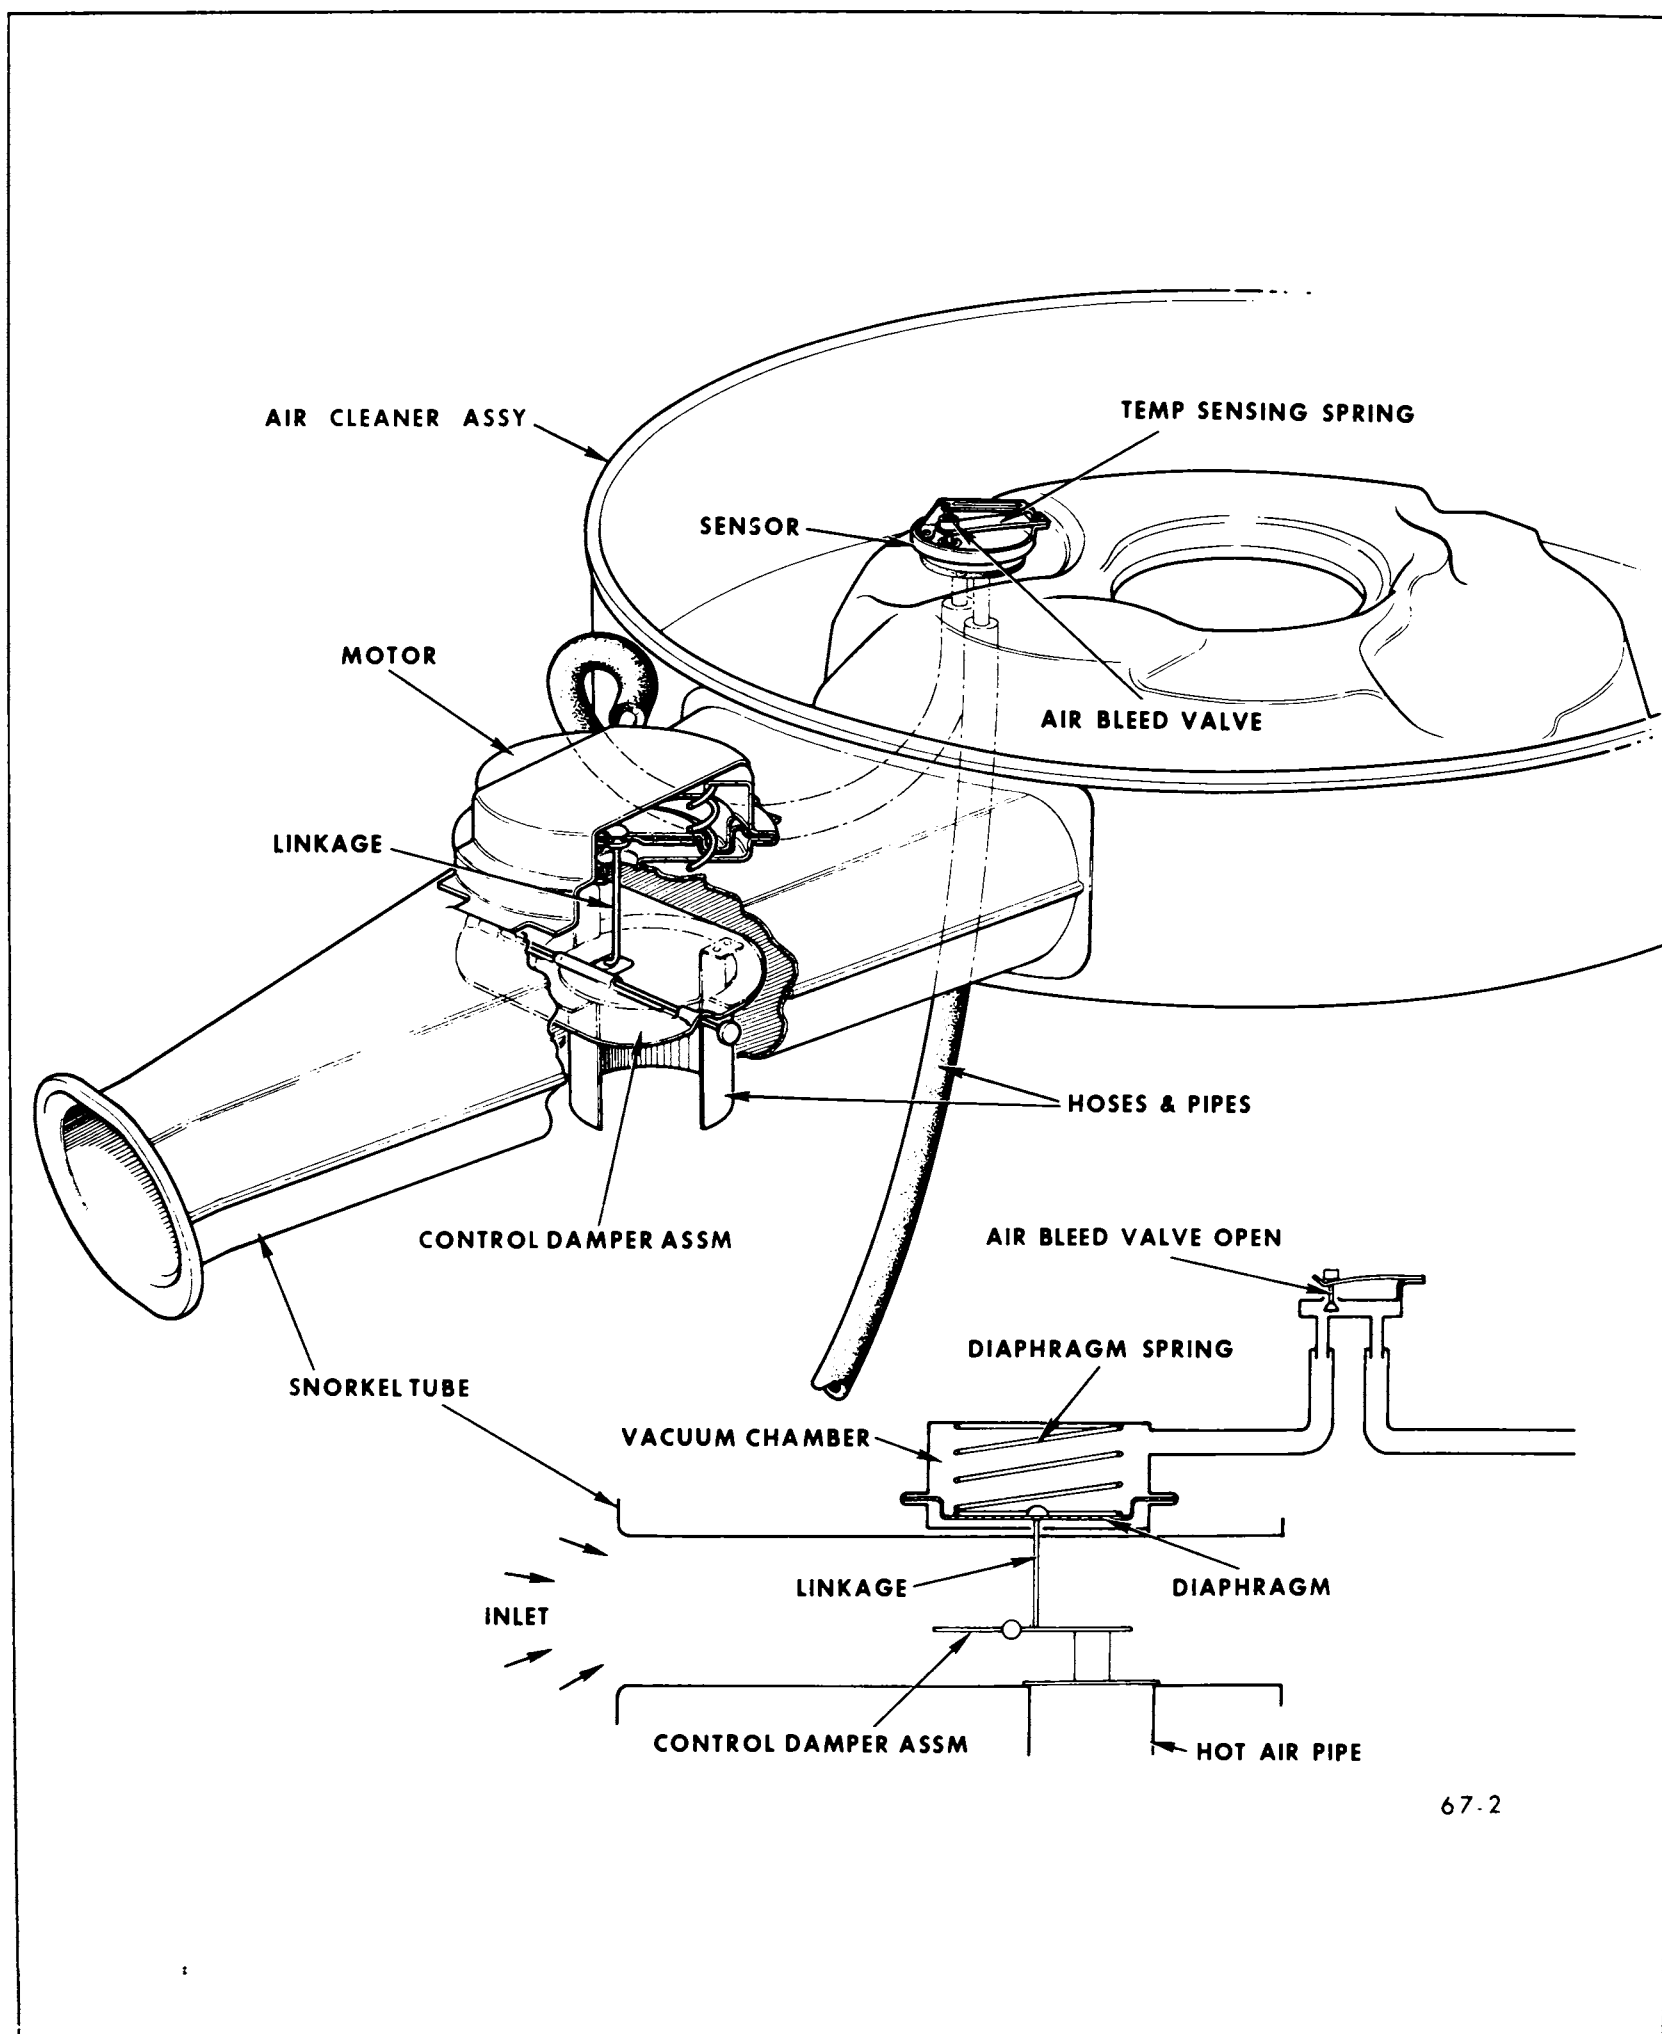


67-2

Figure 67-2—Cold Air Door Open

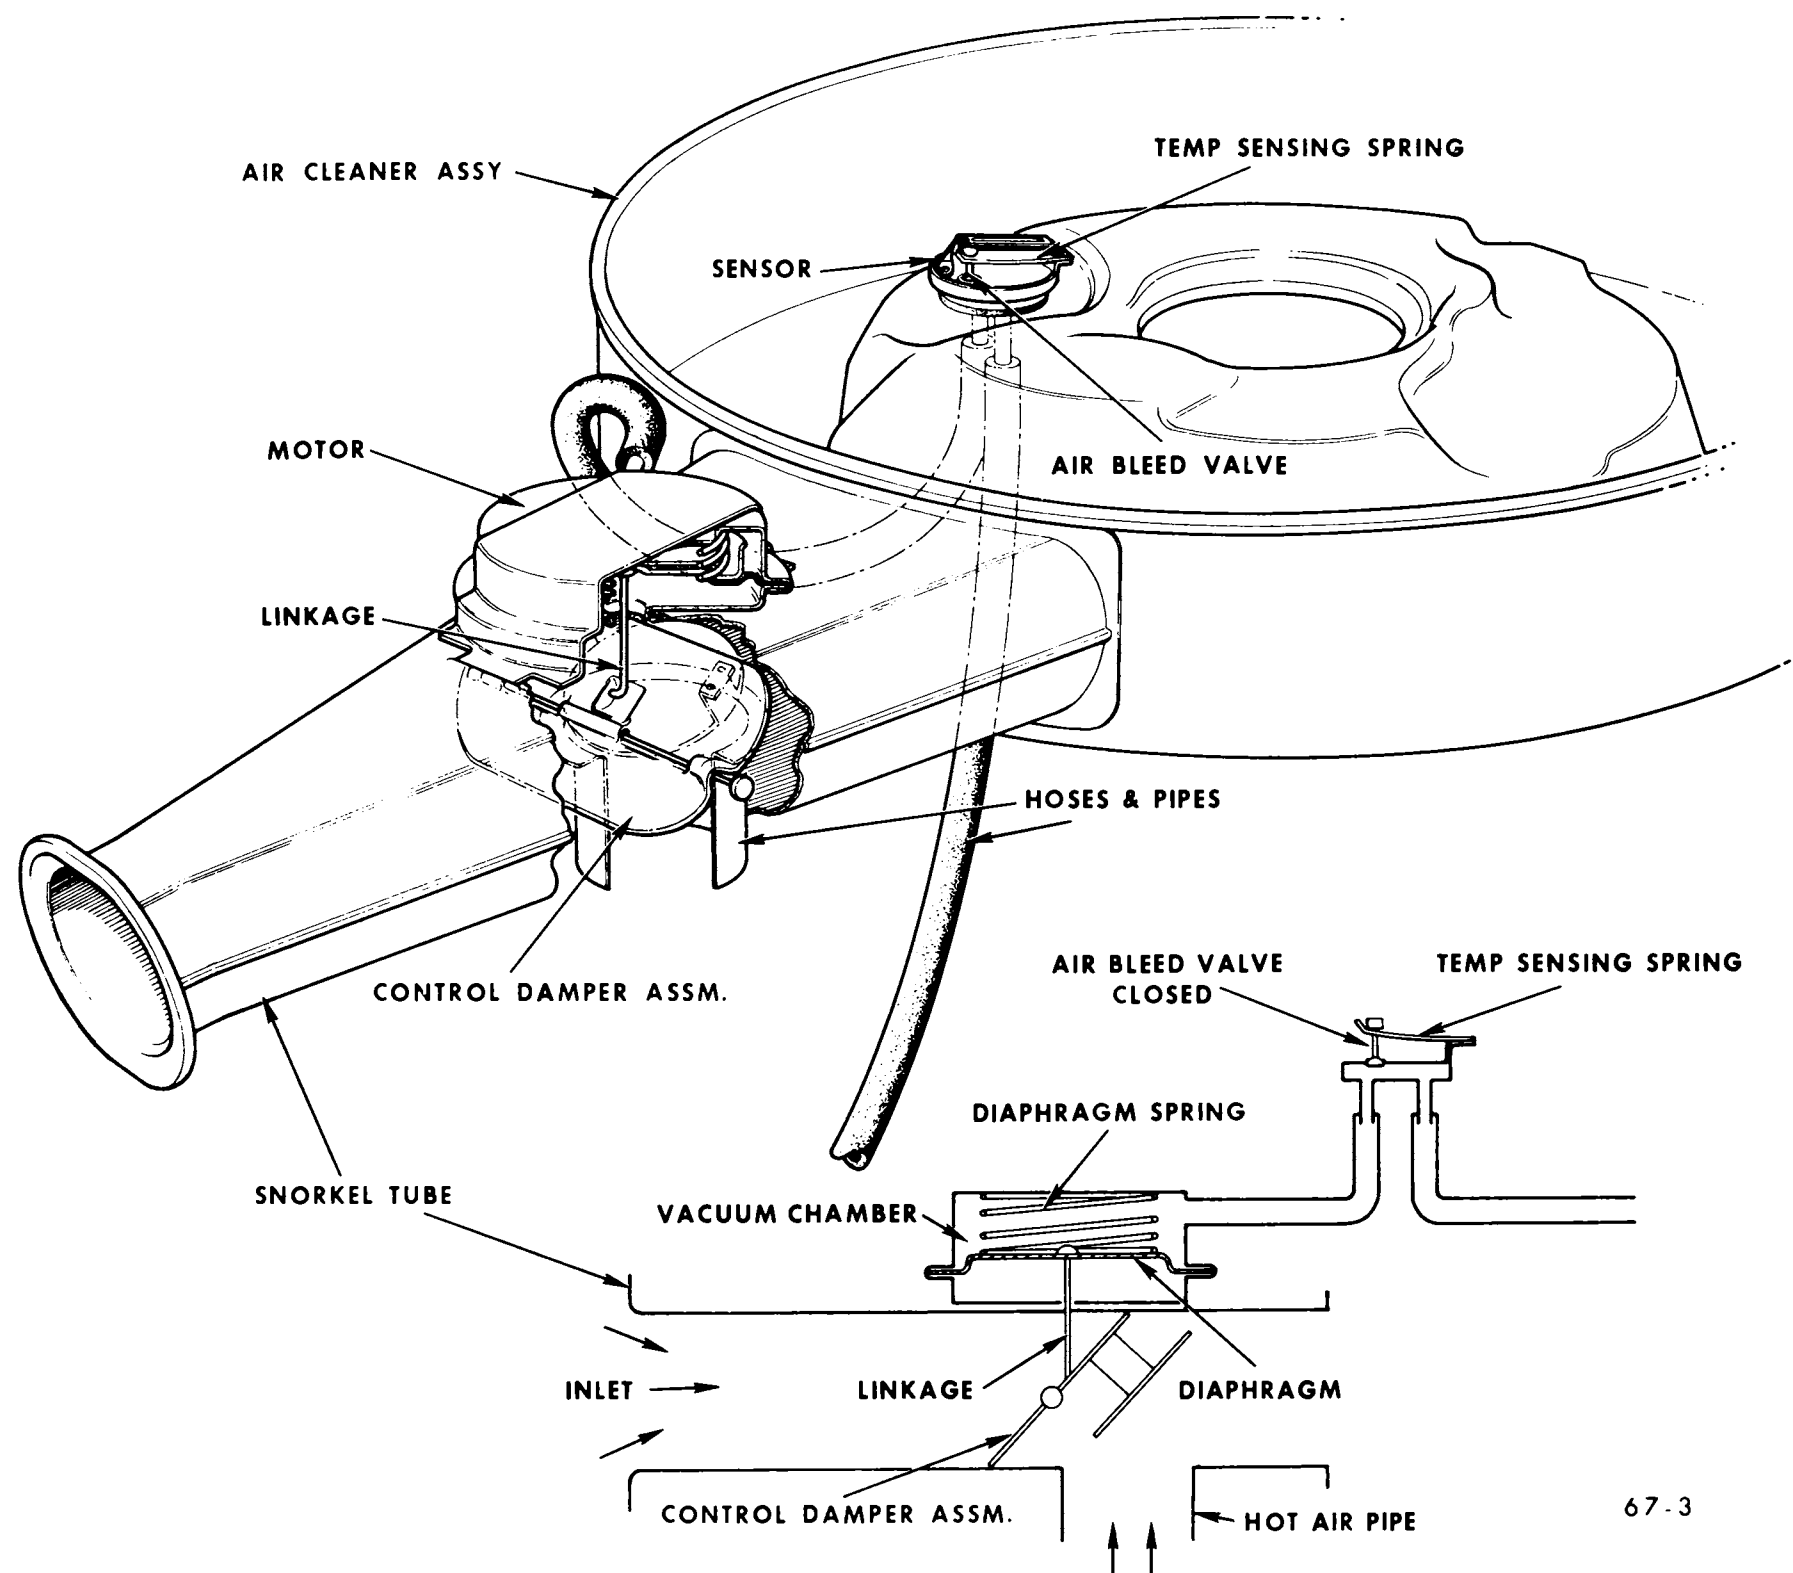

67-3

Figure 67-3—Hot Air Door Open

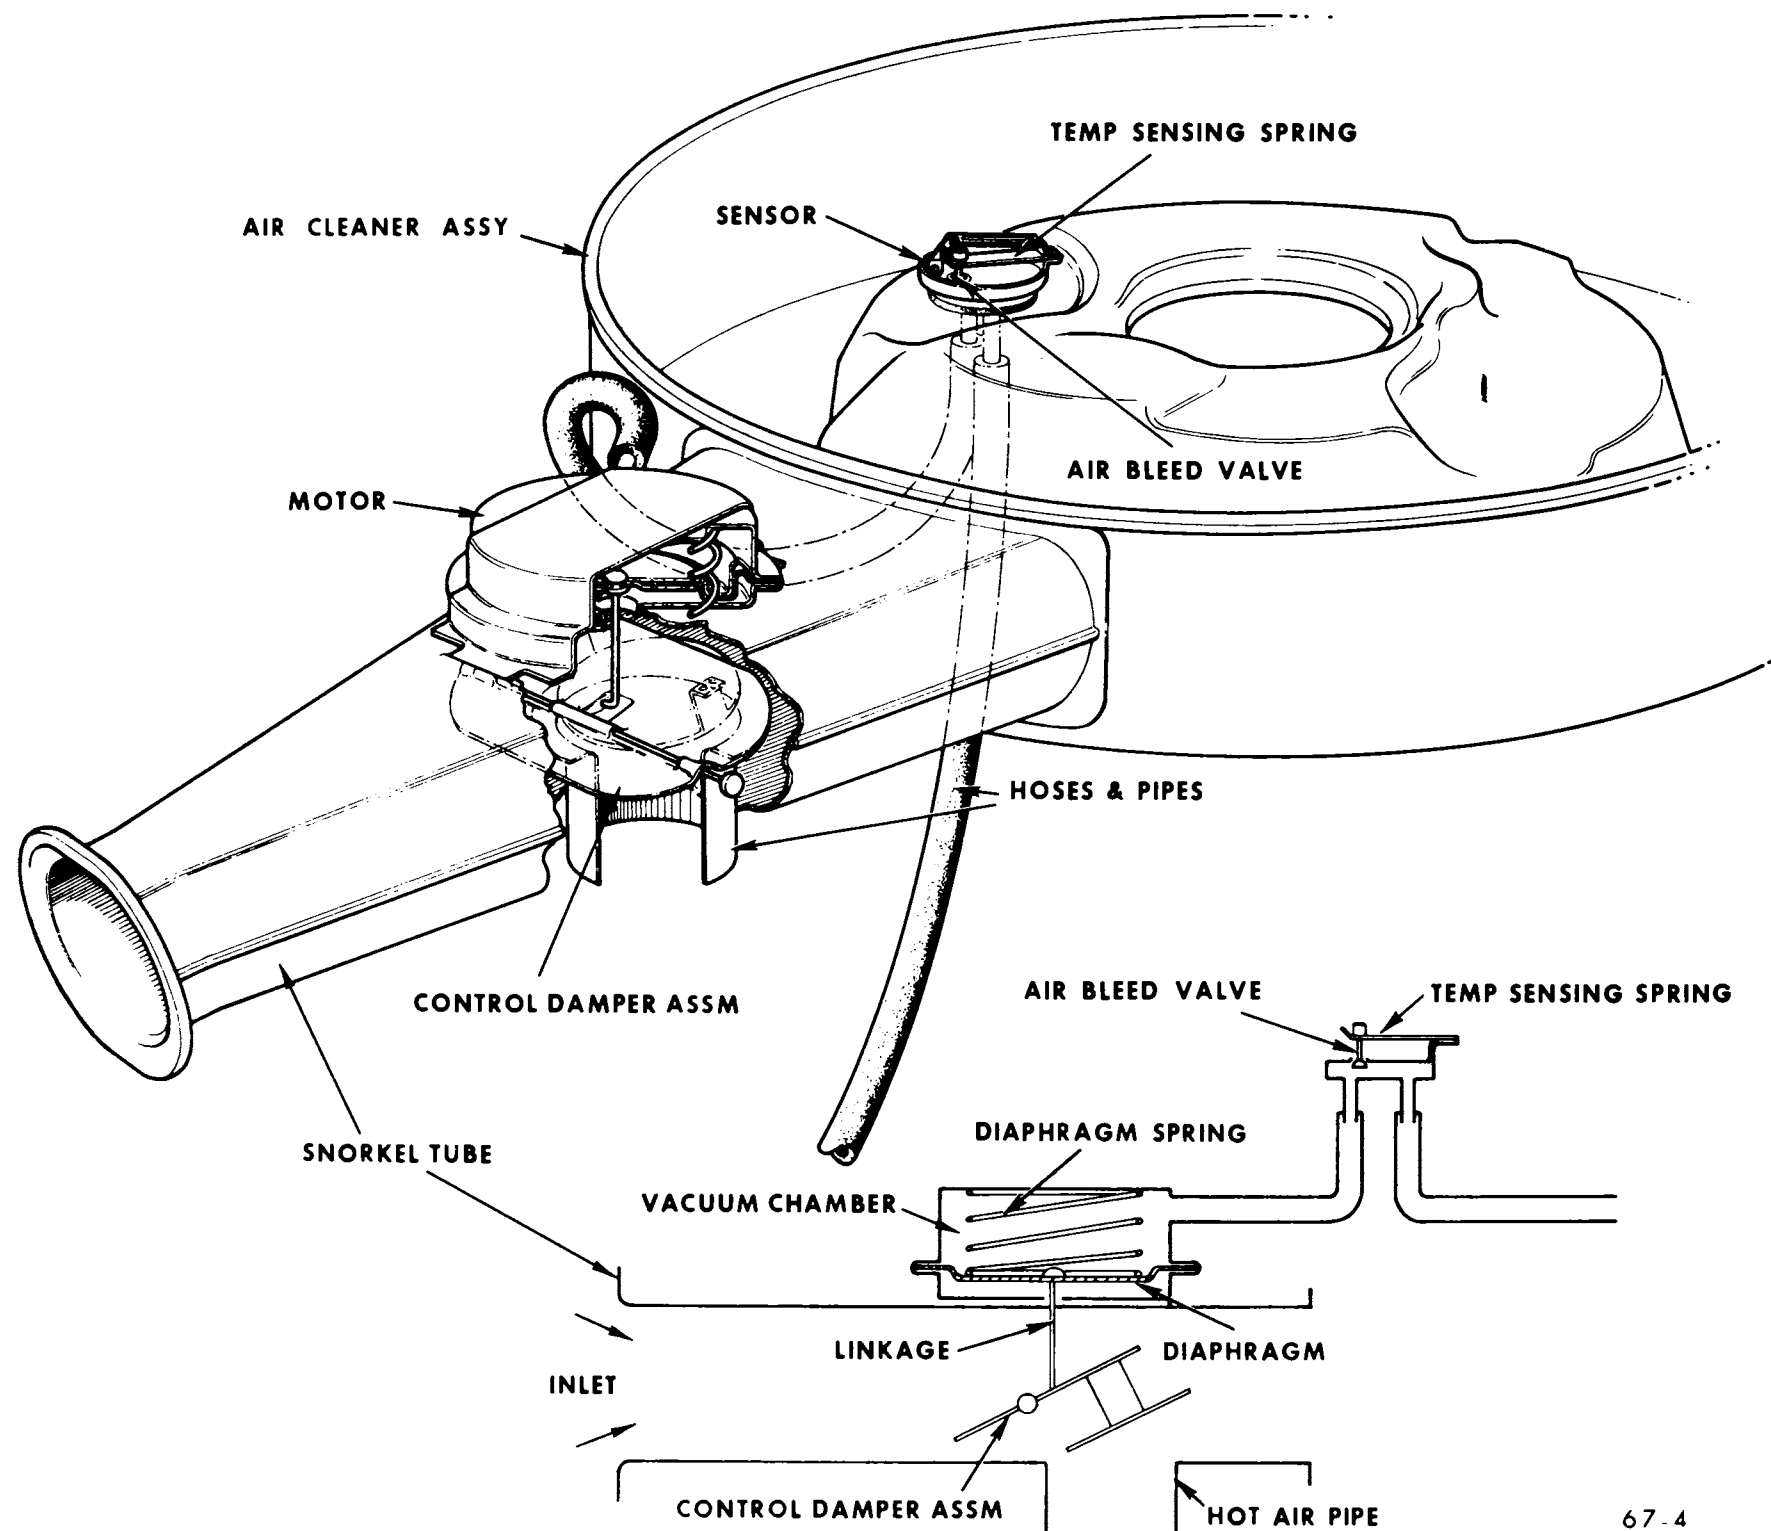

67-4

Figure 67-4—Cold and Hot Air Doors Both Partially Open

air door is closed and the hot air door is opened.

When the engine is not running, the diaphragm spring will always hold the cold air door open and the hot air door closed. However, when the engine is running, the position of the doors depends on the air temperature in the air cleaner.

When starting a cold engine (air cleaner temperature under  $95^{\circ}$ ), the cold air door will close and the hot air door will open immediately. See Figure 67-3. This is because the air bleed valve in the sensor is closed so that full manifold vacuum is applied in the vacuum motor. The cold air door will remain tightly closed only a few minutes, however. As soon as the air cleaner starts receiving hot air from the heat stove, the sensor will cause the cold air door to open partially, mixing cold air with the hot air as necessary to regulate air cleaner temperature within  $20^{\circ}$  of the ideal  $115^{\circ}$  air inlet temperature. See Figure 67-4.

If underhood air temperature rises to  $135^{\circ}$ , the air bleed valve in the sensor will be wide open so that vacuum to the vacuum motor approaches zero. The diaphragm spring in the vacuum motor will hold the cold air door wide open and close the hot air door tightly. If underhood temperature rises above  $135^{\circ}$ , carburetor inlet air temperature will also rise above  $135^{\circ}$ .

While air cleaner temperature is being regulated, accelerating the engine hard will cause the vacuum level in the intake manifold and in the vacuum motor to drop. Whenever vacuum drops below 5 inches, the diaphragm spring will open the cold air door wide in order to get the maximum air flow required for maximum acceleration.

With an L-6 engine, a different air cleaner controls the inlet air

temperature 10 degrees lower than the V-8 engines. On L-6 engines, ideal inlet air temperature is  $105^{\circ} \pm 20^{\circ}$ .

## DIVISION III SERVICE PROCEDURES

### 67-3 REMOVAL AND REPLACEMENT OF C.C.S. UNITS

#### a. R. & R. Vacuum Motor

1. Drill center of two spot welds using a 1/16 inch drill. Do not center punch.
2. Enlarge two holes using a 5/32 inch drill.

**CAUTION:** Use extreme care not to damage the air cleaner snorkel.

3. Remove vacuum motor retainer strap. See Figure 67-5.
4. Lift vacuum motor, cocking it to one side to unhook motor linkage at the control door.
5. Drill a 7/64" hole in snorkel tube at point "A" as shown in Figure 67-5.
6. Use the motor strap retainer and the sheet metal screw provided in the motor service package to secure the retainer and motor to the snorkel tube.
7. Make sure the screw does not interfere with the operation of the damper assembly. Shorten screw if required.

#### b. R. & R. Air Cleaner Sensor

1. Remove two sensor retaining clips by prying. See Figure 67-6.
2. Pull vacuum hoses from sensor.
3. Note carefully the installed position of the sensor so that you can install new sensor in same position. Then remove sensor.
4. Install sensor and gasket assembly in air cleaner in same position as noted in Step 3. This is to eliminate the possibility of

interference with the air filter element.

5. Install sensor retaining clip, meanwhile supporting sensor at B around the outside rim to prevent damage to the temperature sensing spring. See Figure 67-5.

6. Reinstall vacuum hoses.

## DIVISION IV TROUBLE DIAGNOSIS

### 67-4 TESTING THERMO AIR CLEANER OPERATION

Since failure of the thermo air cleaner will generally result in the snorkel cold air door staying open, failure will probably go unnoticed in warm or hot weather. In cold weather, however, owners will complain of leanness, hesitation, sag, surge or stalling. When any type of lean operation complaint is received, always test the thermo air cleaner for proper functioning before doing any work on the carburetor.

**NOTE:** Always perform checks in the same order as listed below.

#### a. General Check of System

1. Check all hoses for proper hook-up. Check for kinked, plugged or damaged hoses.
2. With engine off, make sure cold air door is wide open.

3. With engine running, check operation of vacuum motor by connecting a test hose directly from intake manifold to vacuum motor. Cold air door should close. If door fails to close, determine if motor linkage is properly connected to door or if a bind is present; if linkage is okay, then vacuum motor must be replaced.

#### b. Quick Check of System

1. Start test with engine cold, air

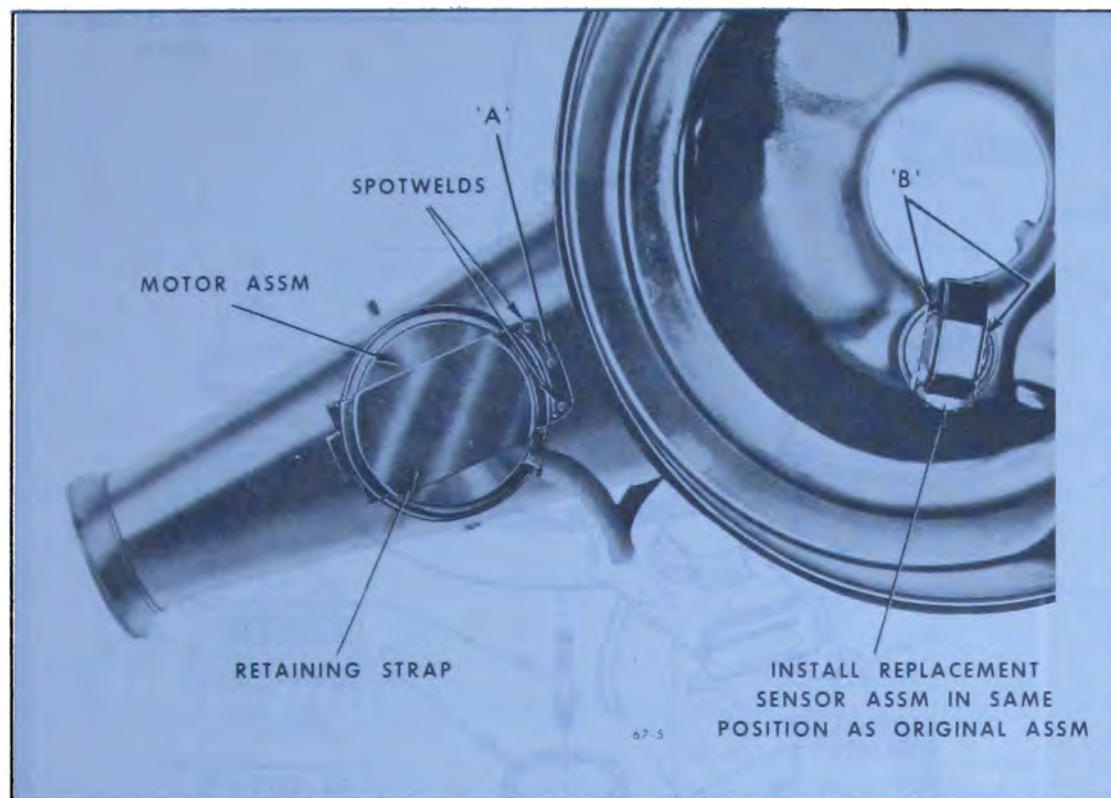


Figure 67-5—Replacing Vacuum Motor Assembly

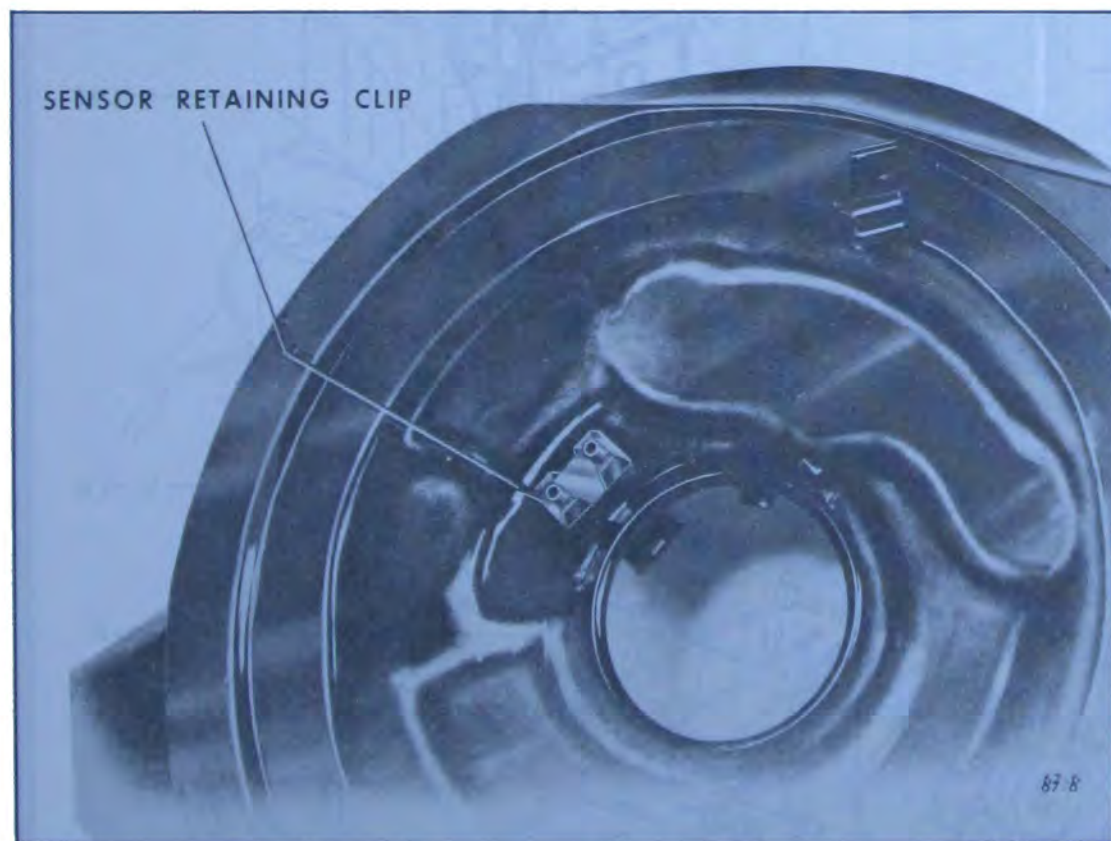


Figure 67-6—Replacing Sensor Assembly

cleaner at a temperature below 85°. If the engine has been in recent use, allow it to cool.

2. Observe the cold air door before starting the engine; it should be wide open.

3. Start the engine and allow it to idle. Immediately after starting the engine, the cold air door should close.

4. As the engine warms up, the cold air door should start to open and the air cleaner should become warm to the hand.

5. The system is operating normally as described above. If the air cleaner fails to operate as above or if correct operation of the air cleaner is still in doubt, proceed to the thermometer check.

#### c. Thermometer Check of System

1. Start test with air cleaner temperature below 85°. If engine has been run recently, allow it to cool down. While engine is cooling, remove air cleaner cover and install a temperature gage such as J-22973 next to sensor. Reinstall air cleaner cover. Do not install wing nut. Let car stand idle for 1/2 hour or more before proceeding to step 2.

2. Start engine. Cold air door should close immediately if engine is cool enough. When cold air door starts to open (in a few minutes), remove air cleaner cover and read temperature gage. It must read  $115^{\circ} \pm 20^{\circ}$ . (L-6 engine --  $105^{\circ} \pm 20^{\circ}$ .)

3. If cold air door does not start to open at temperature indicated, temperature sensor is defective and must be replaced.


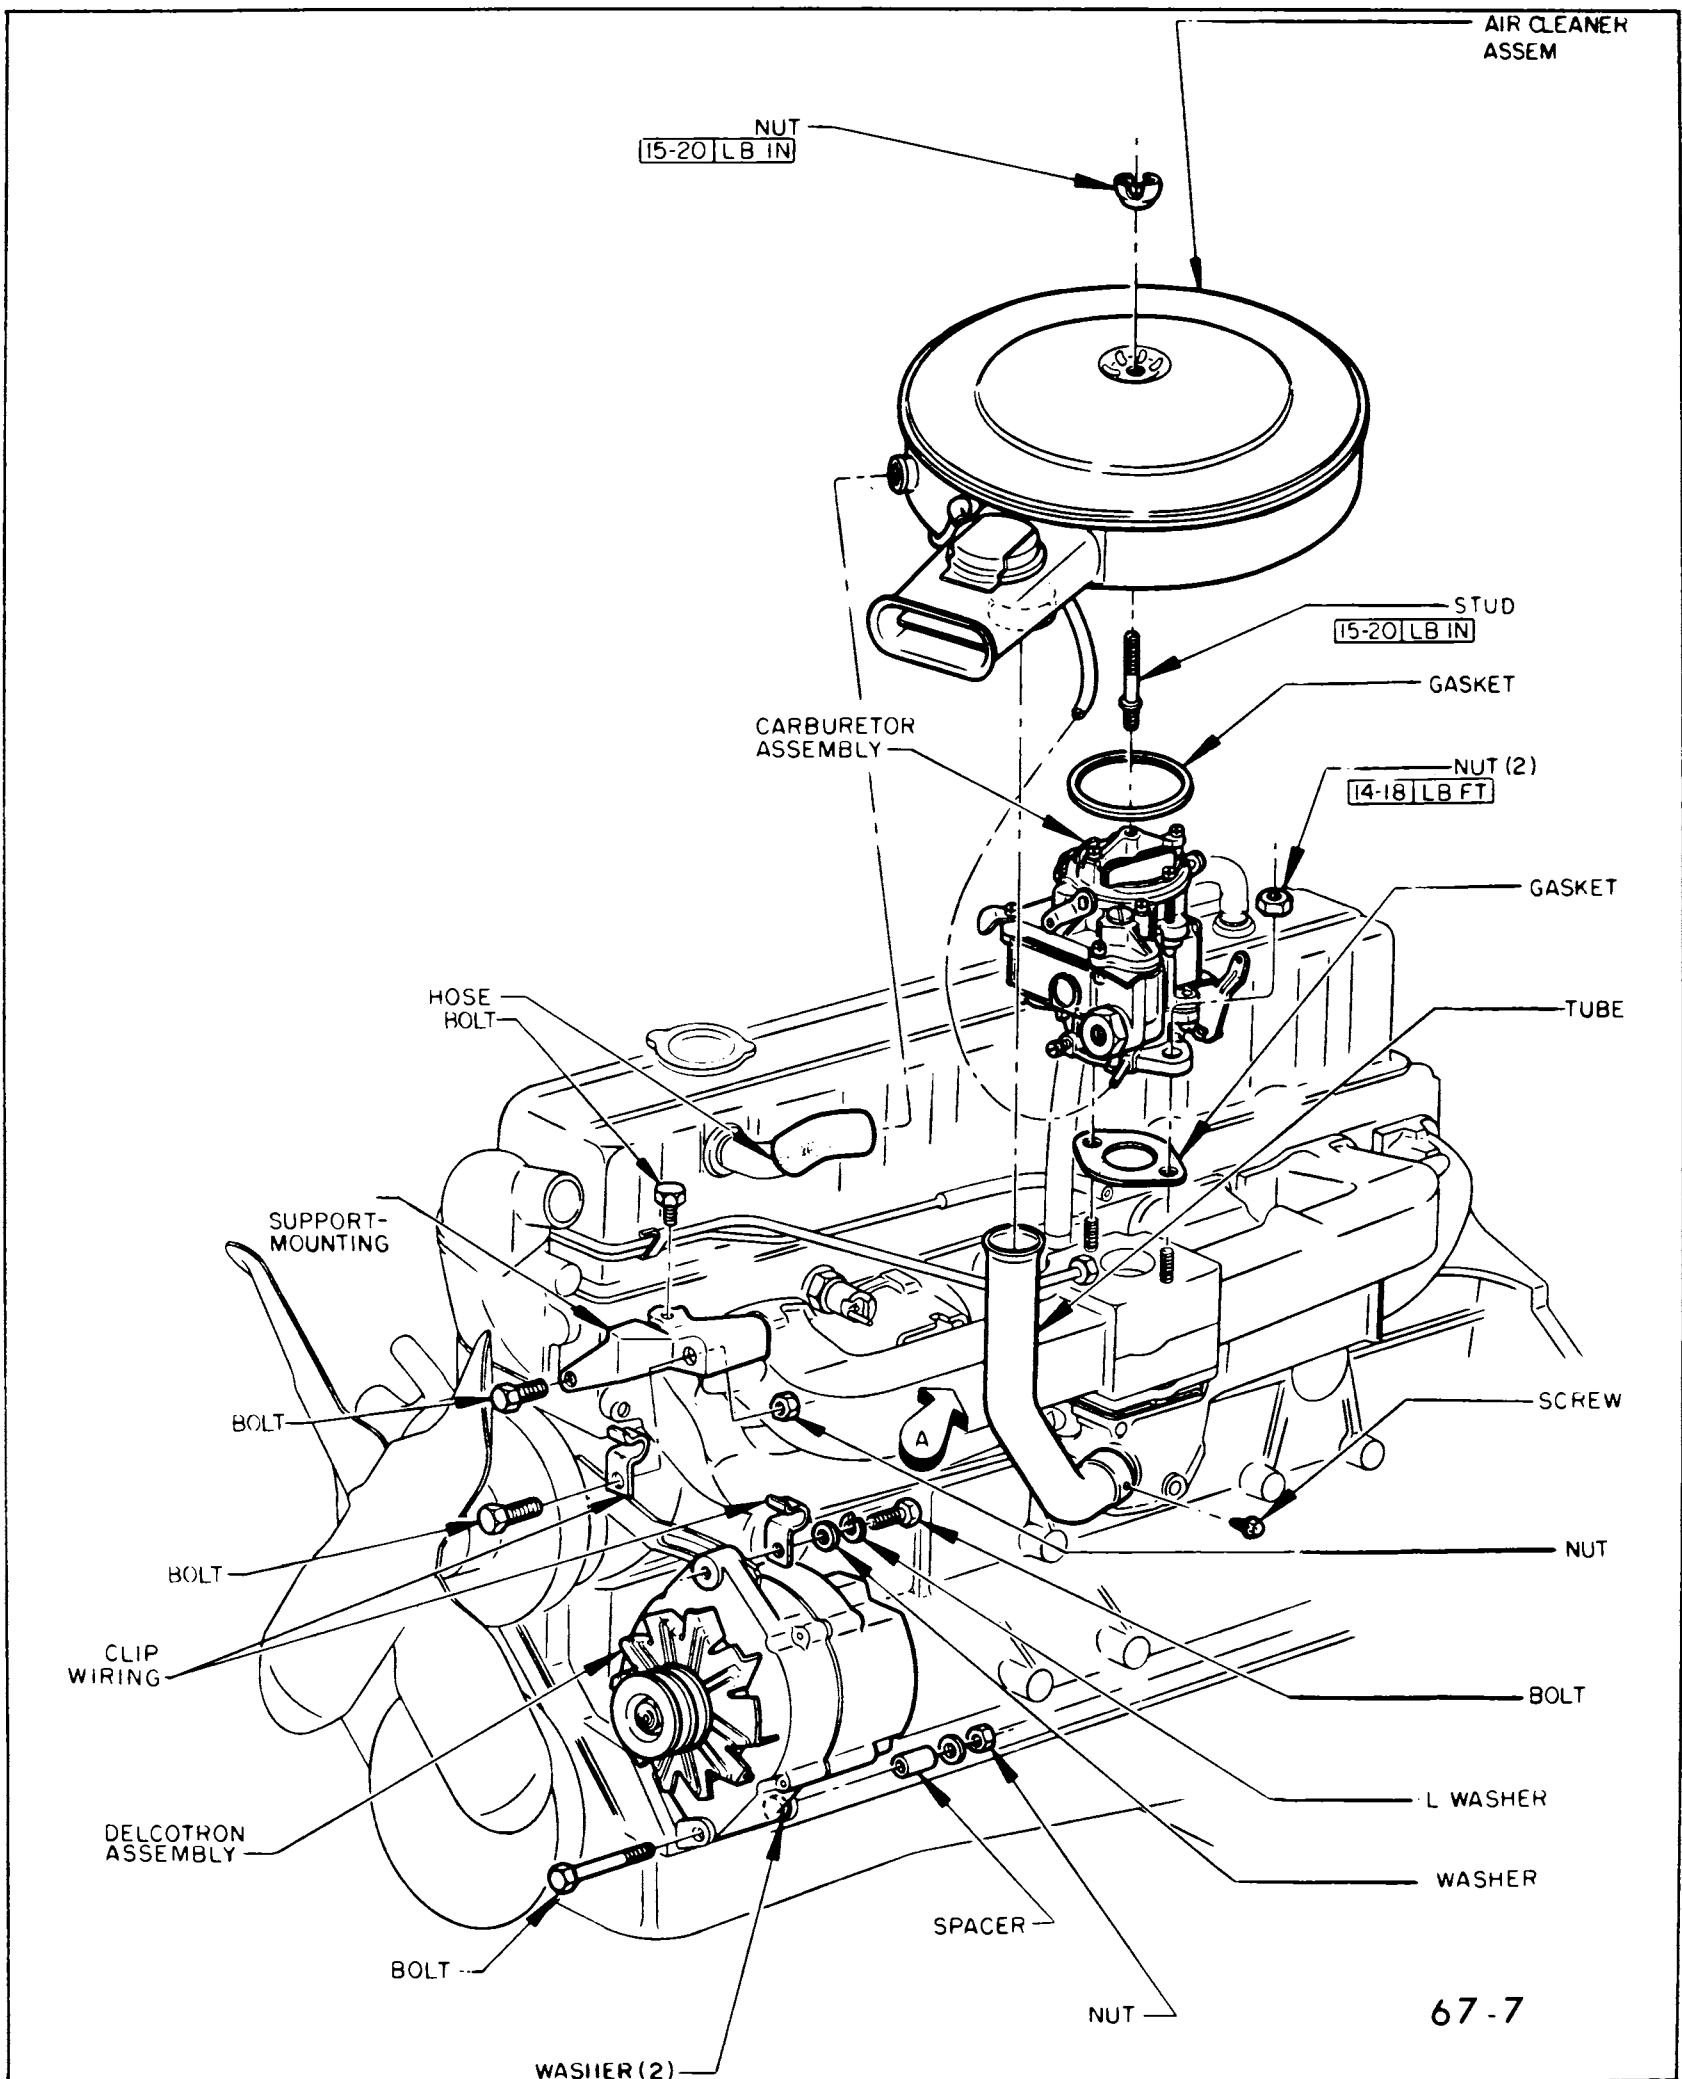


Figure 67-7—Heated Air System - 250 Engine (L-6)

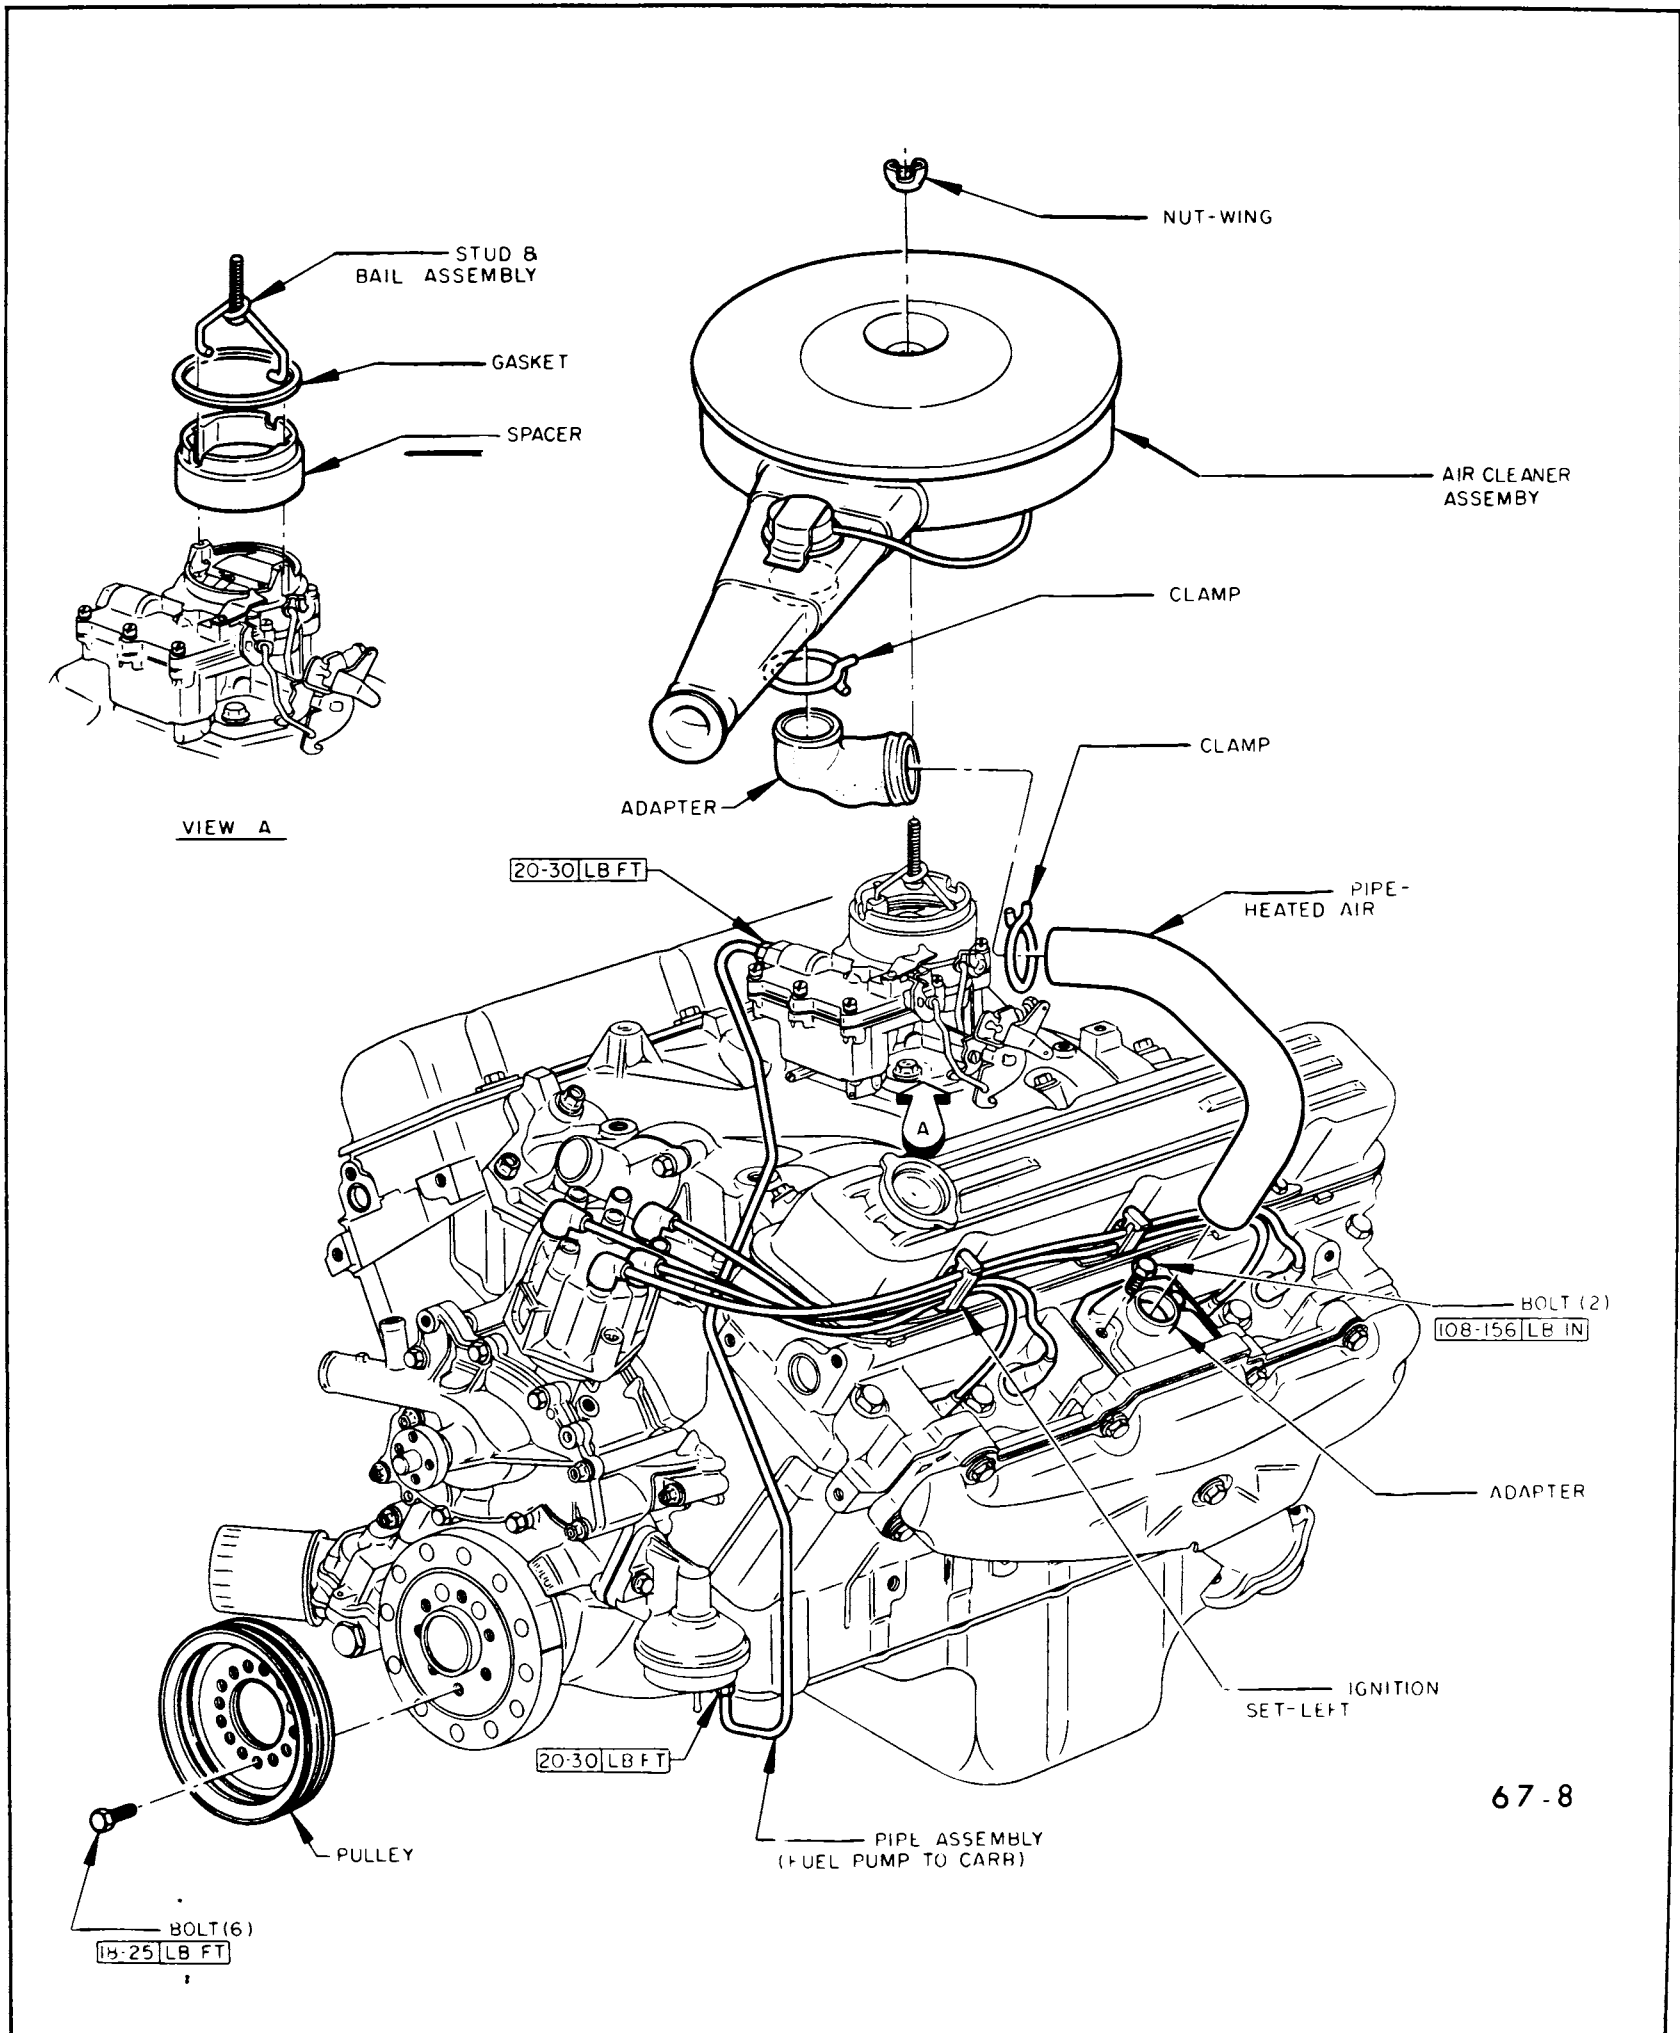

67-8

Figure 67-8—Heated Air System - 350 2-Barrel Engine

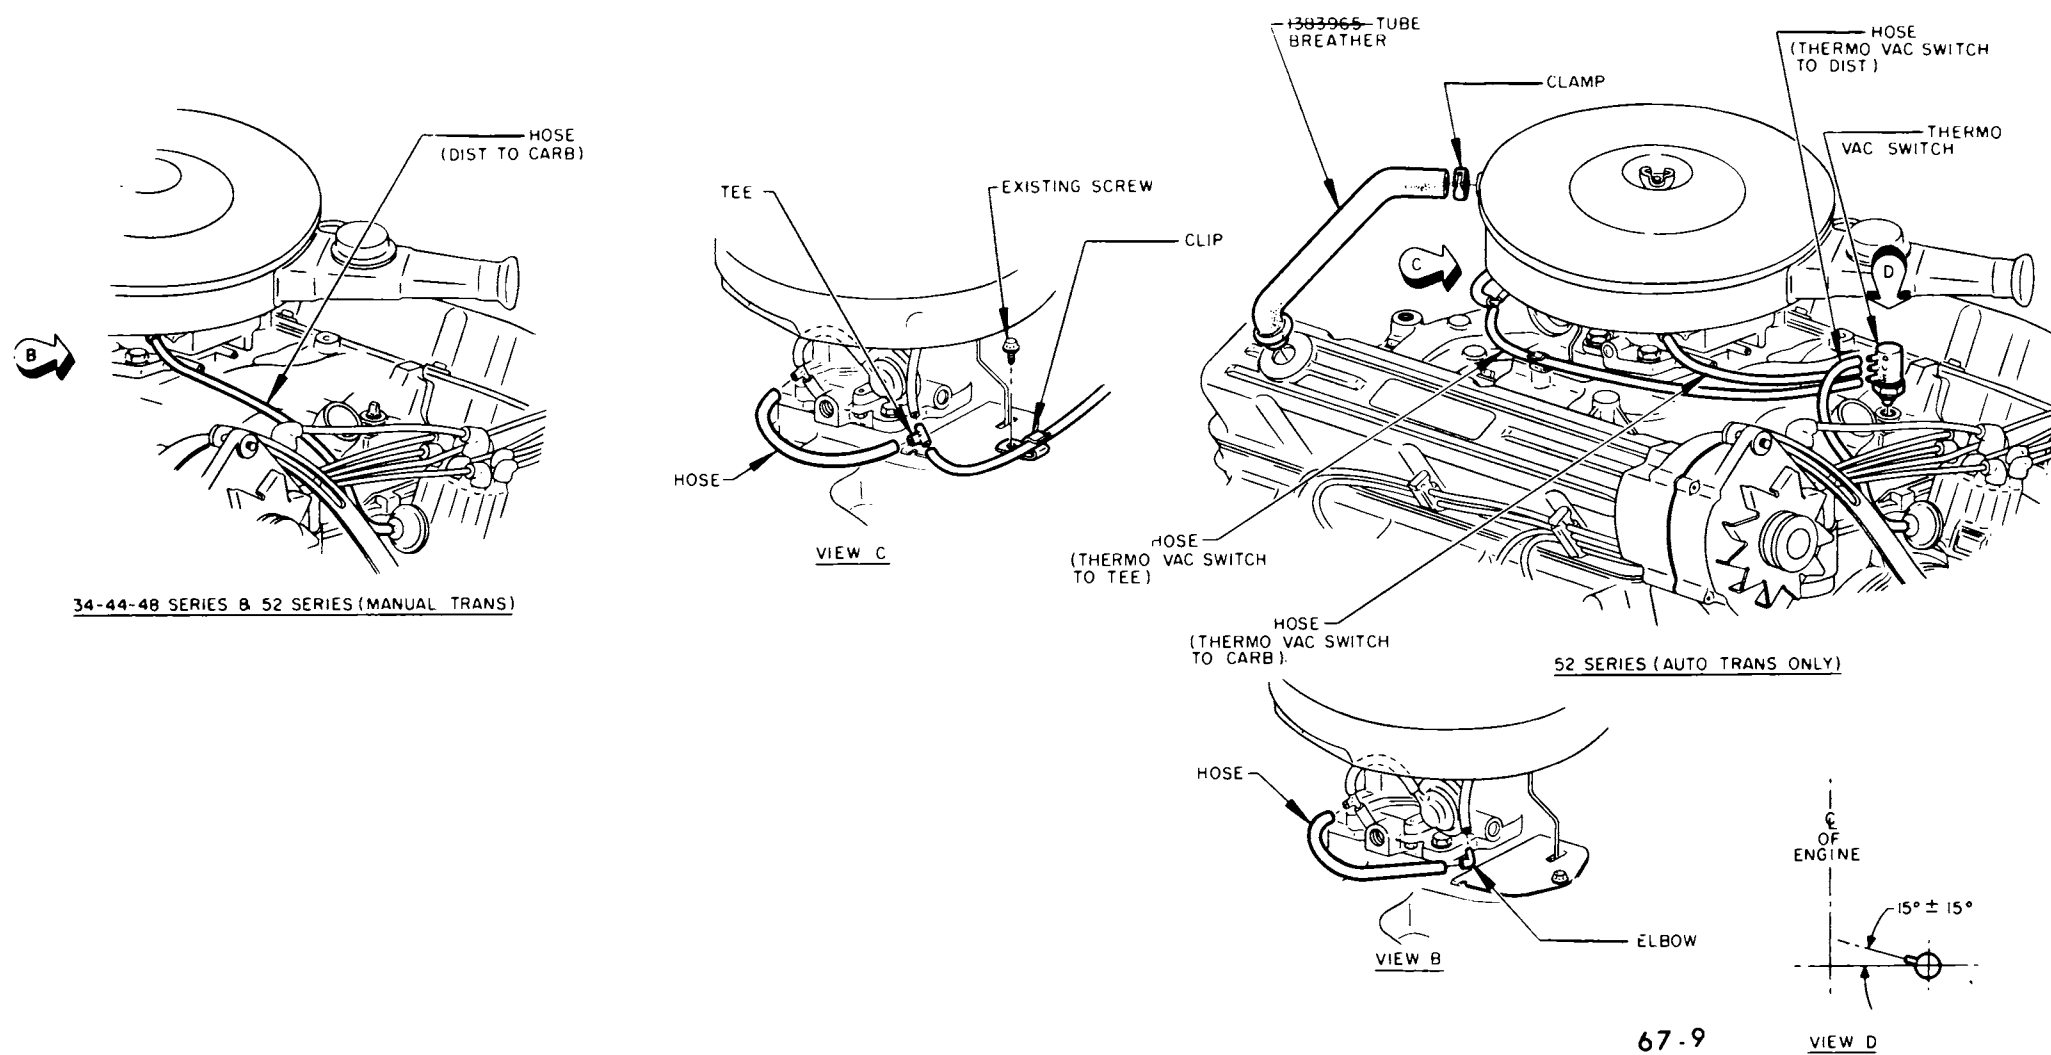


Figure 67-9—Thermo Vacuum Switch Hose Installation - 350 2-Barrel Engine

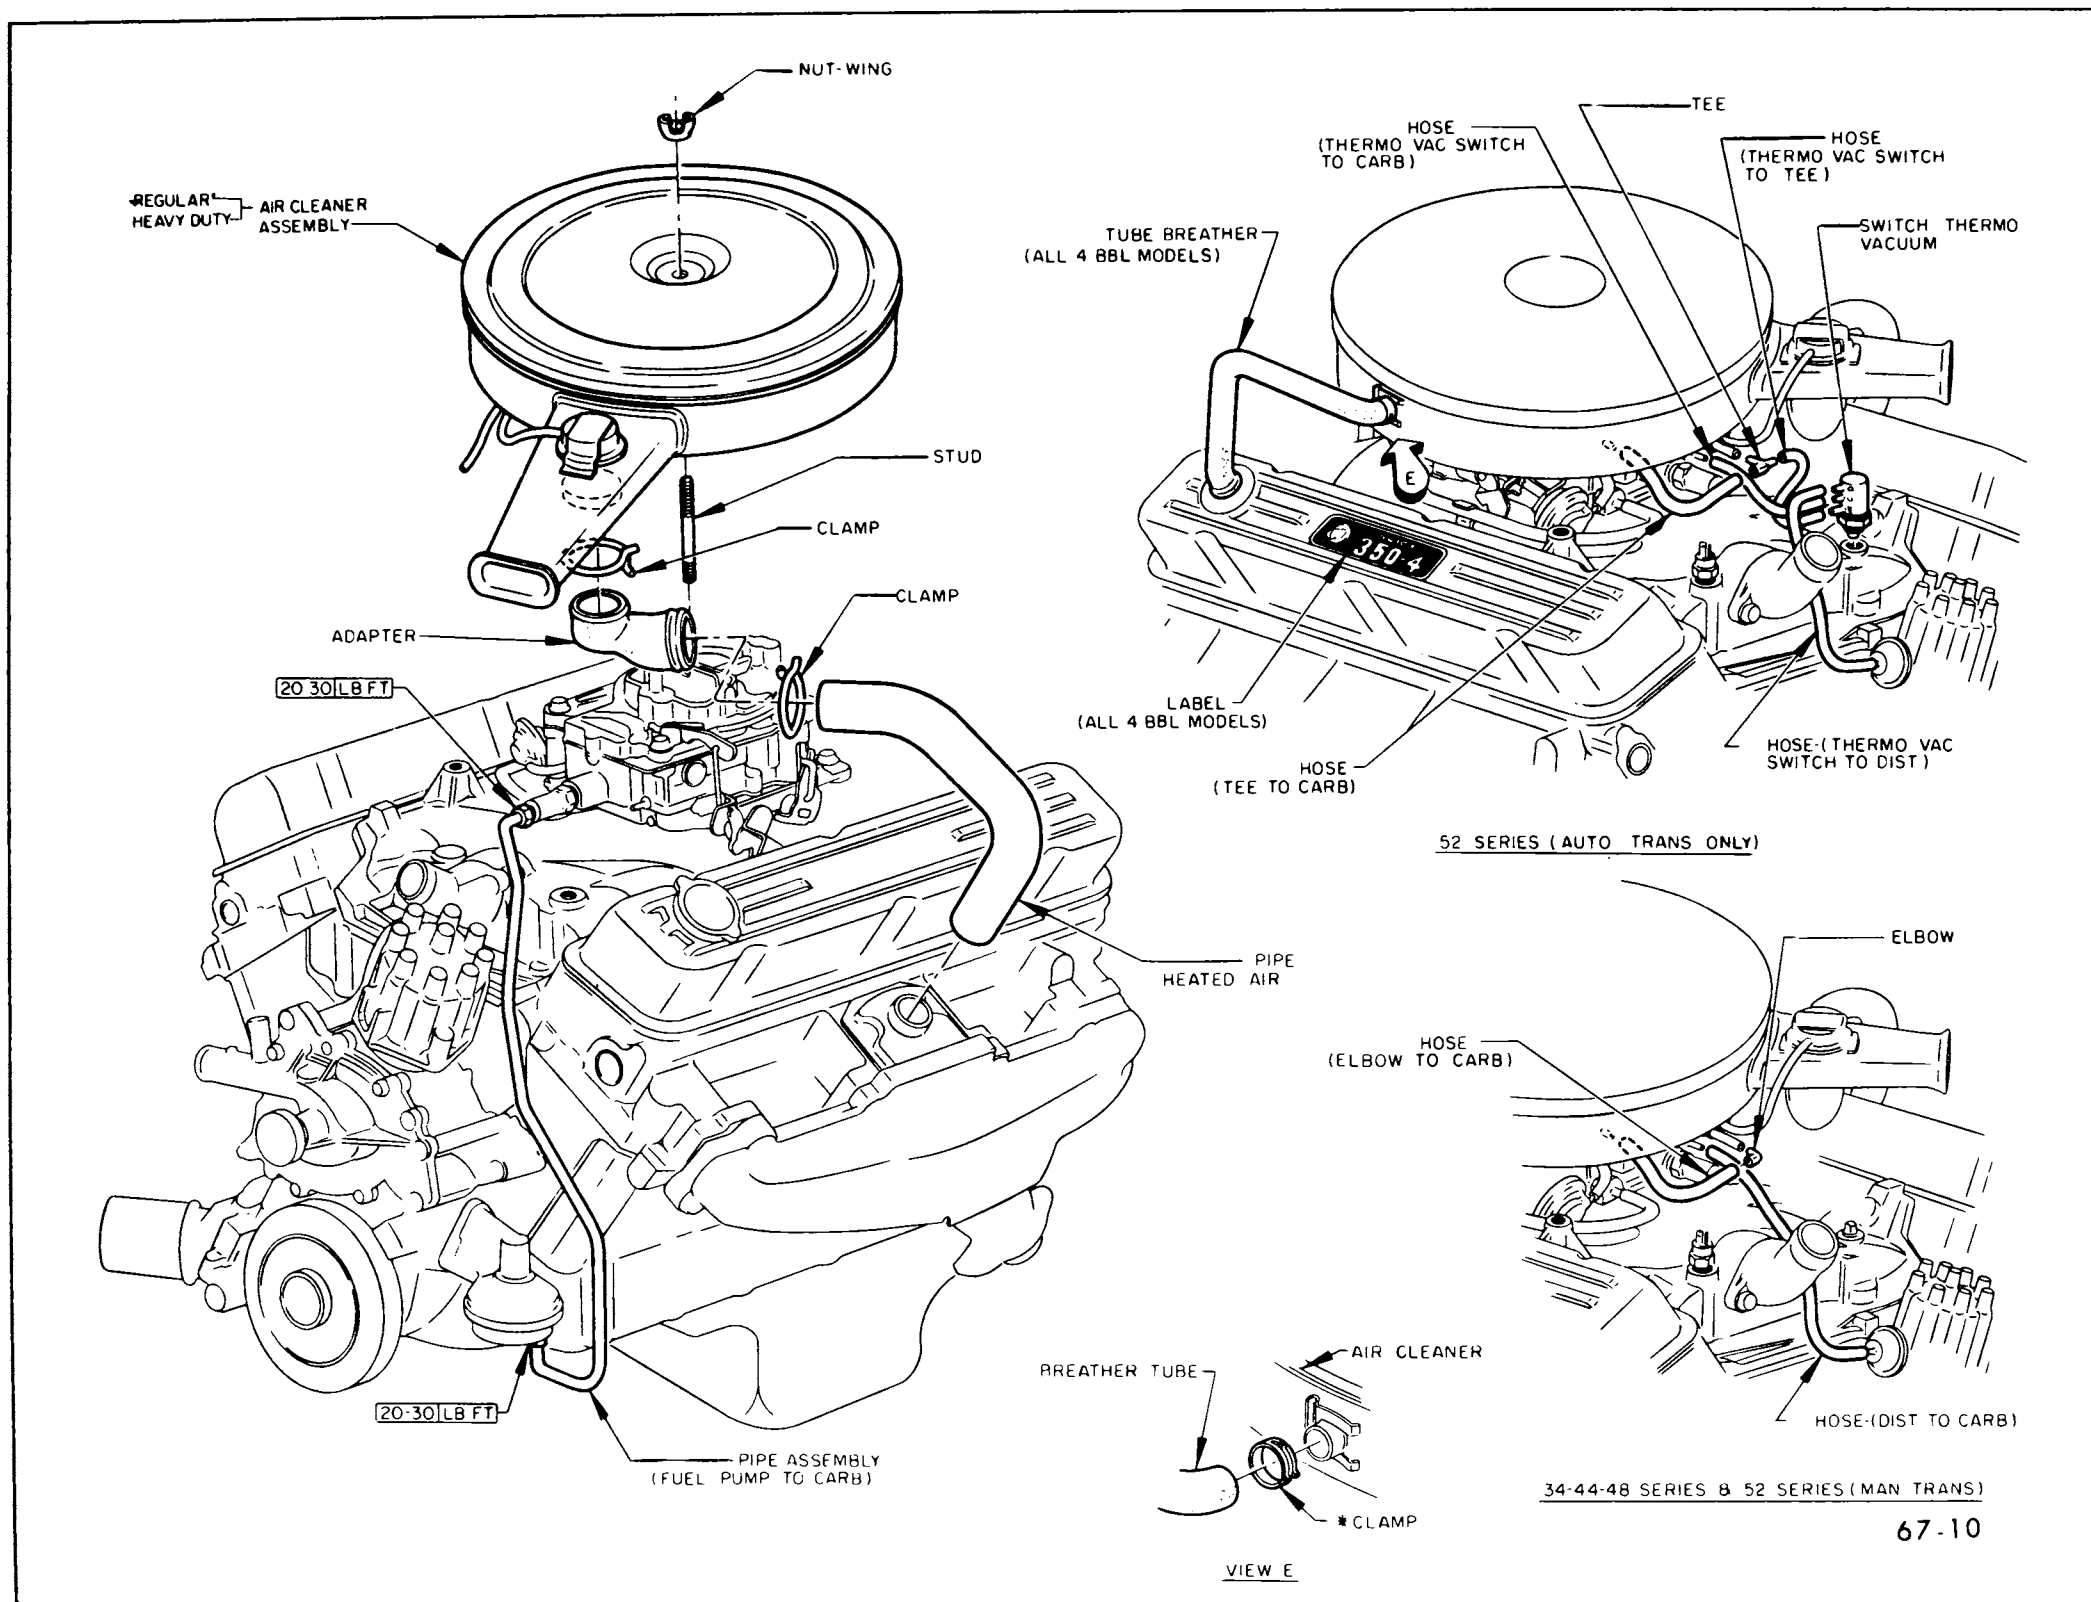


Figure 67-10—Heated Air System - 350 4-Barrel Engine

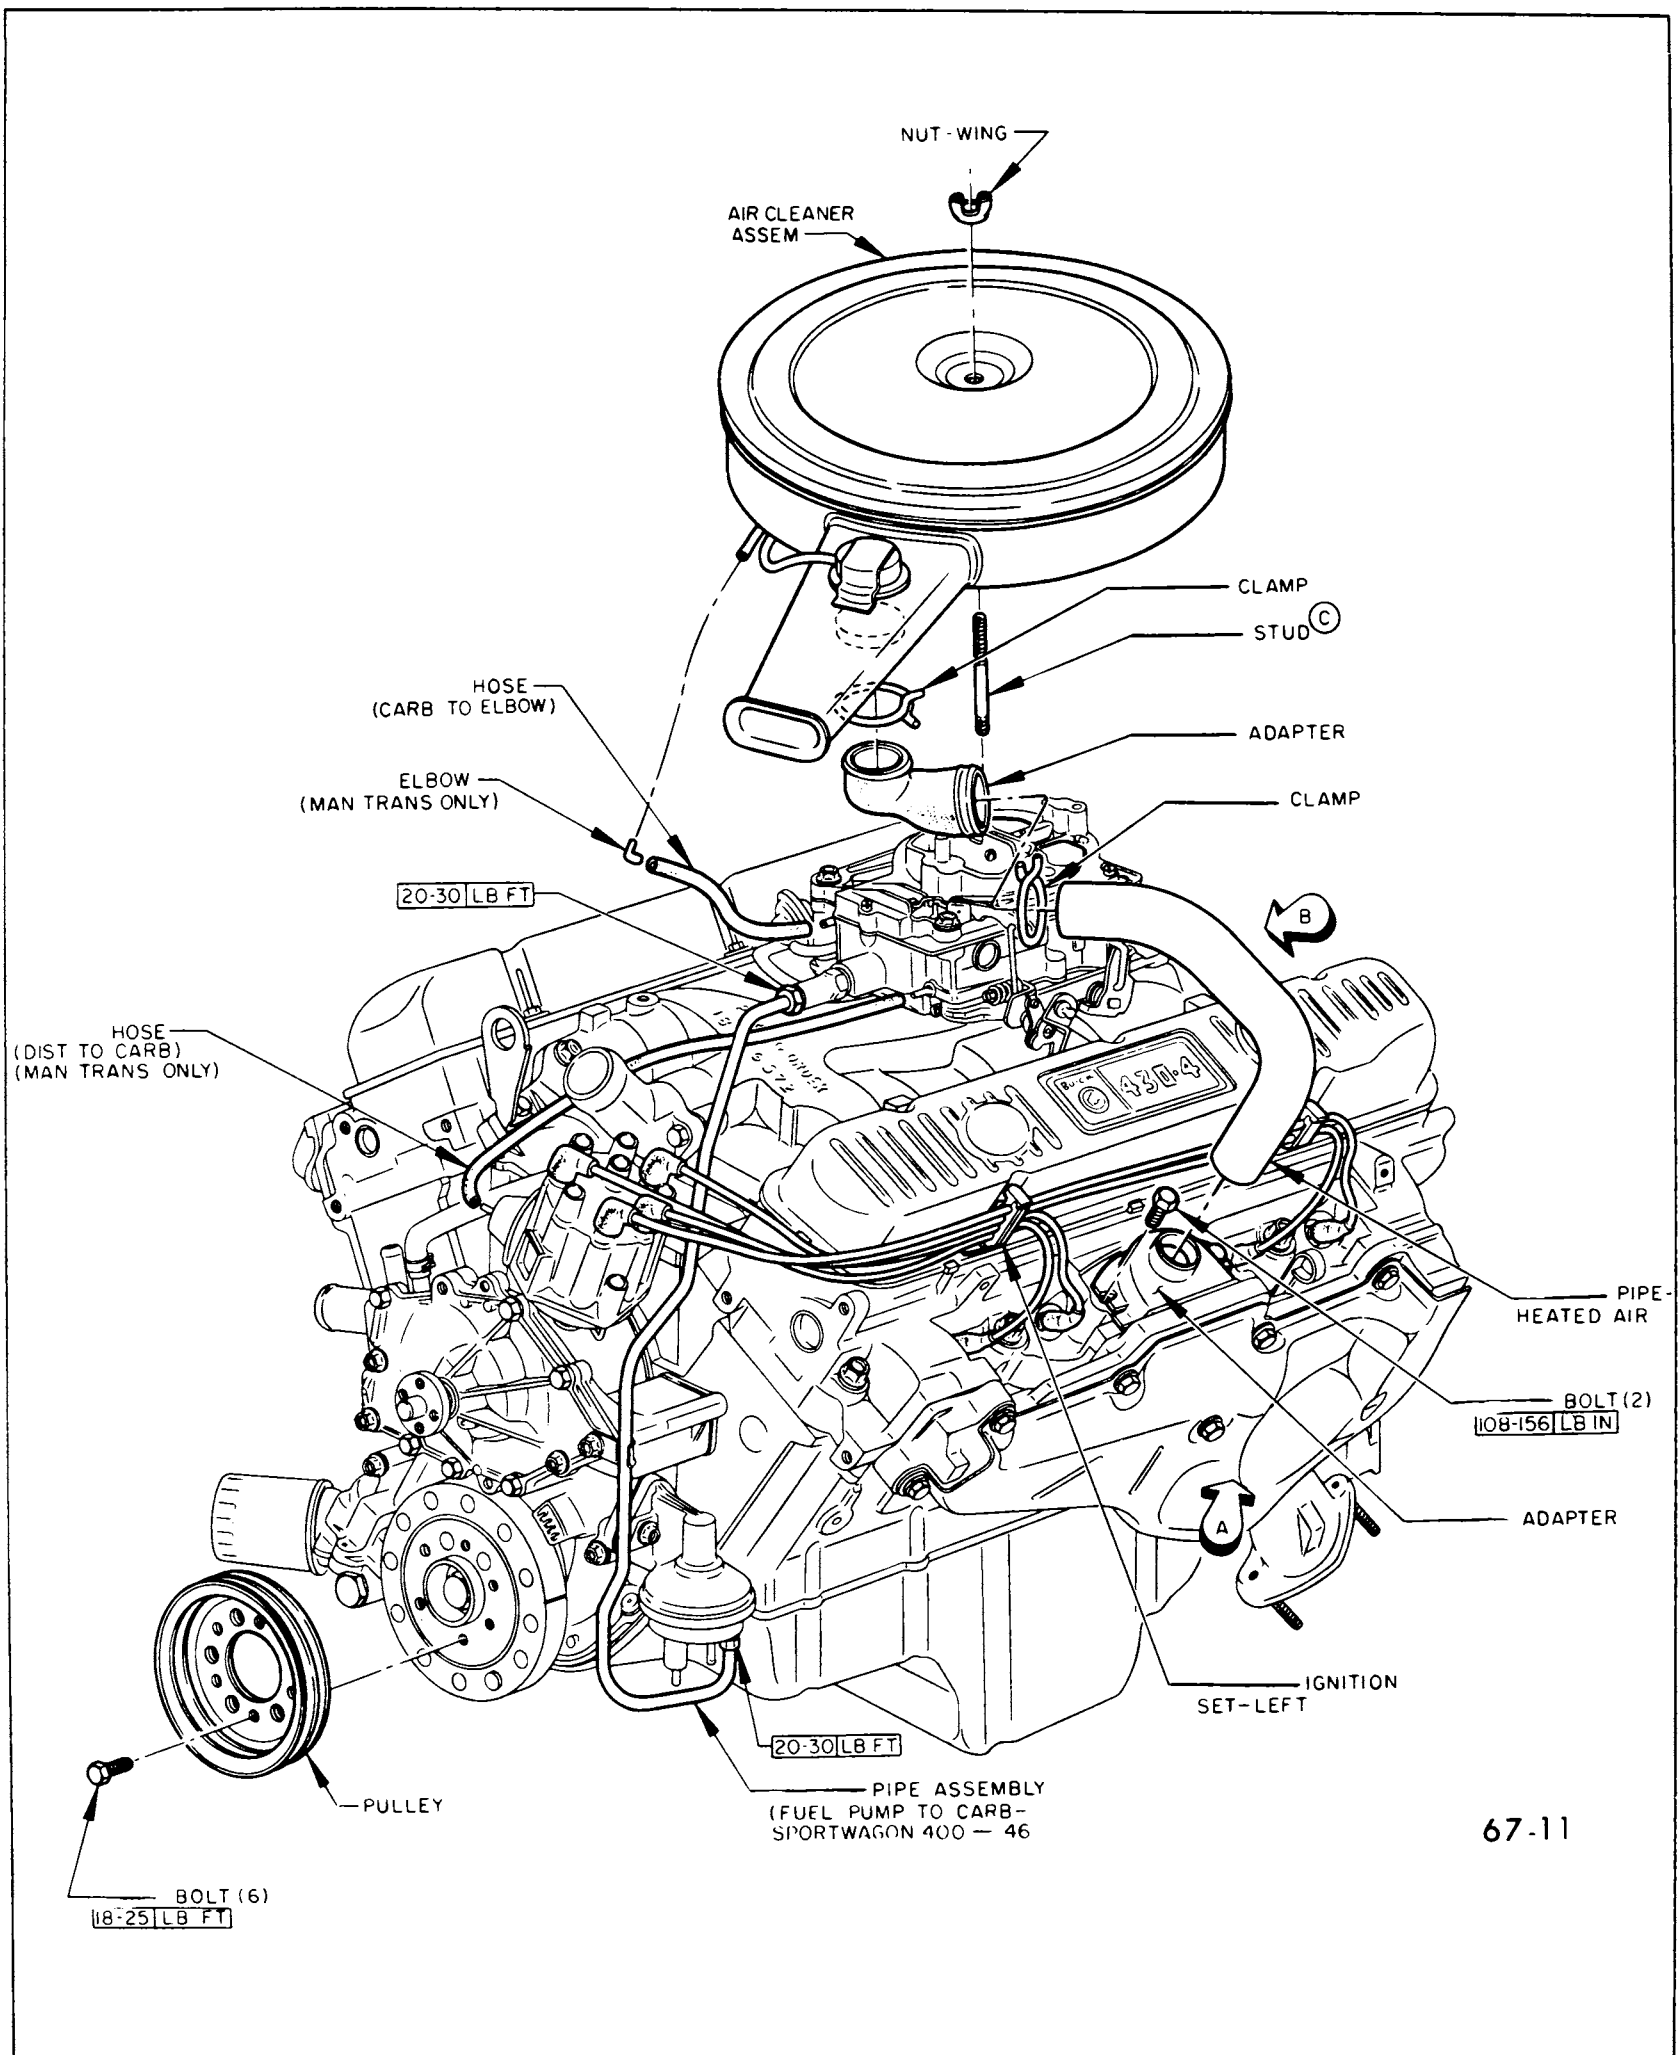


Figure 67-11—Heated Air System - 400-430 Engine

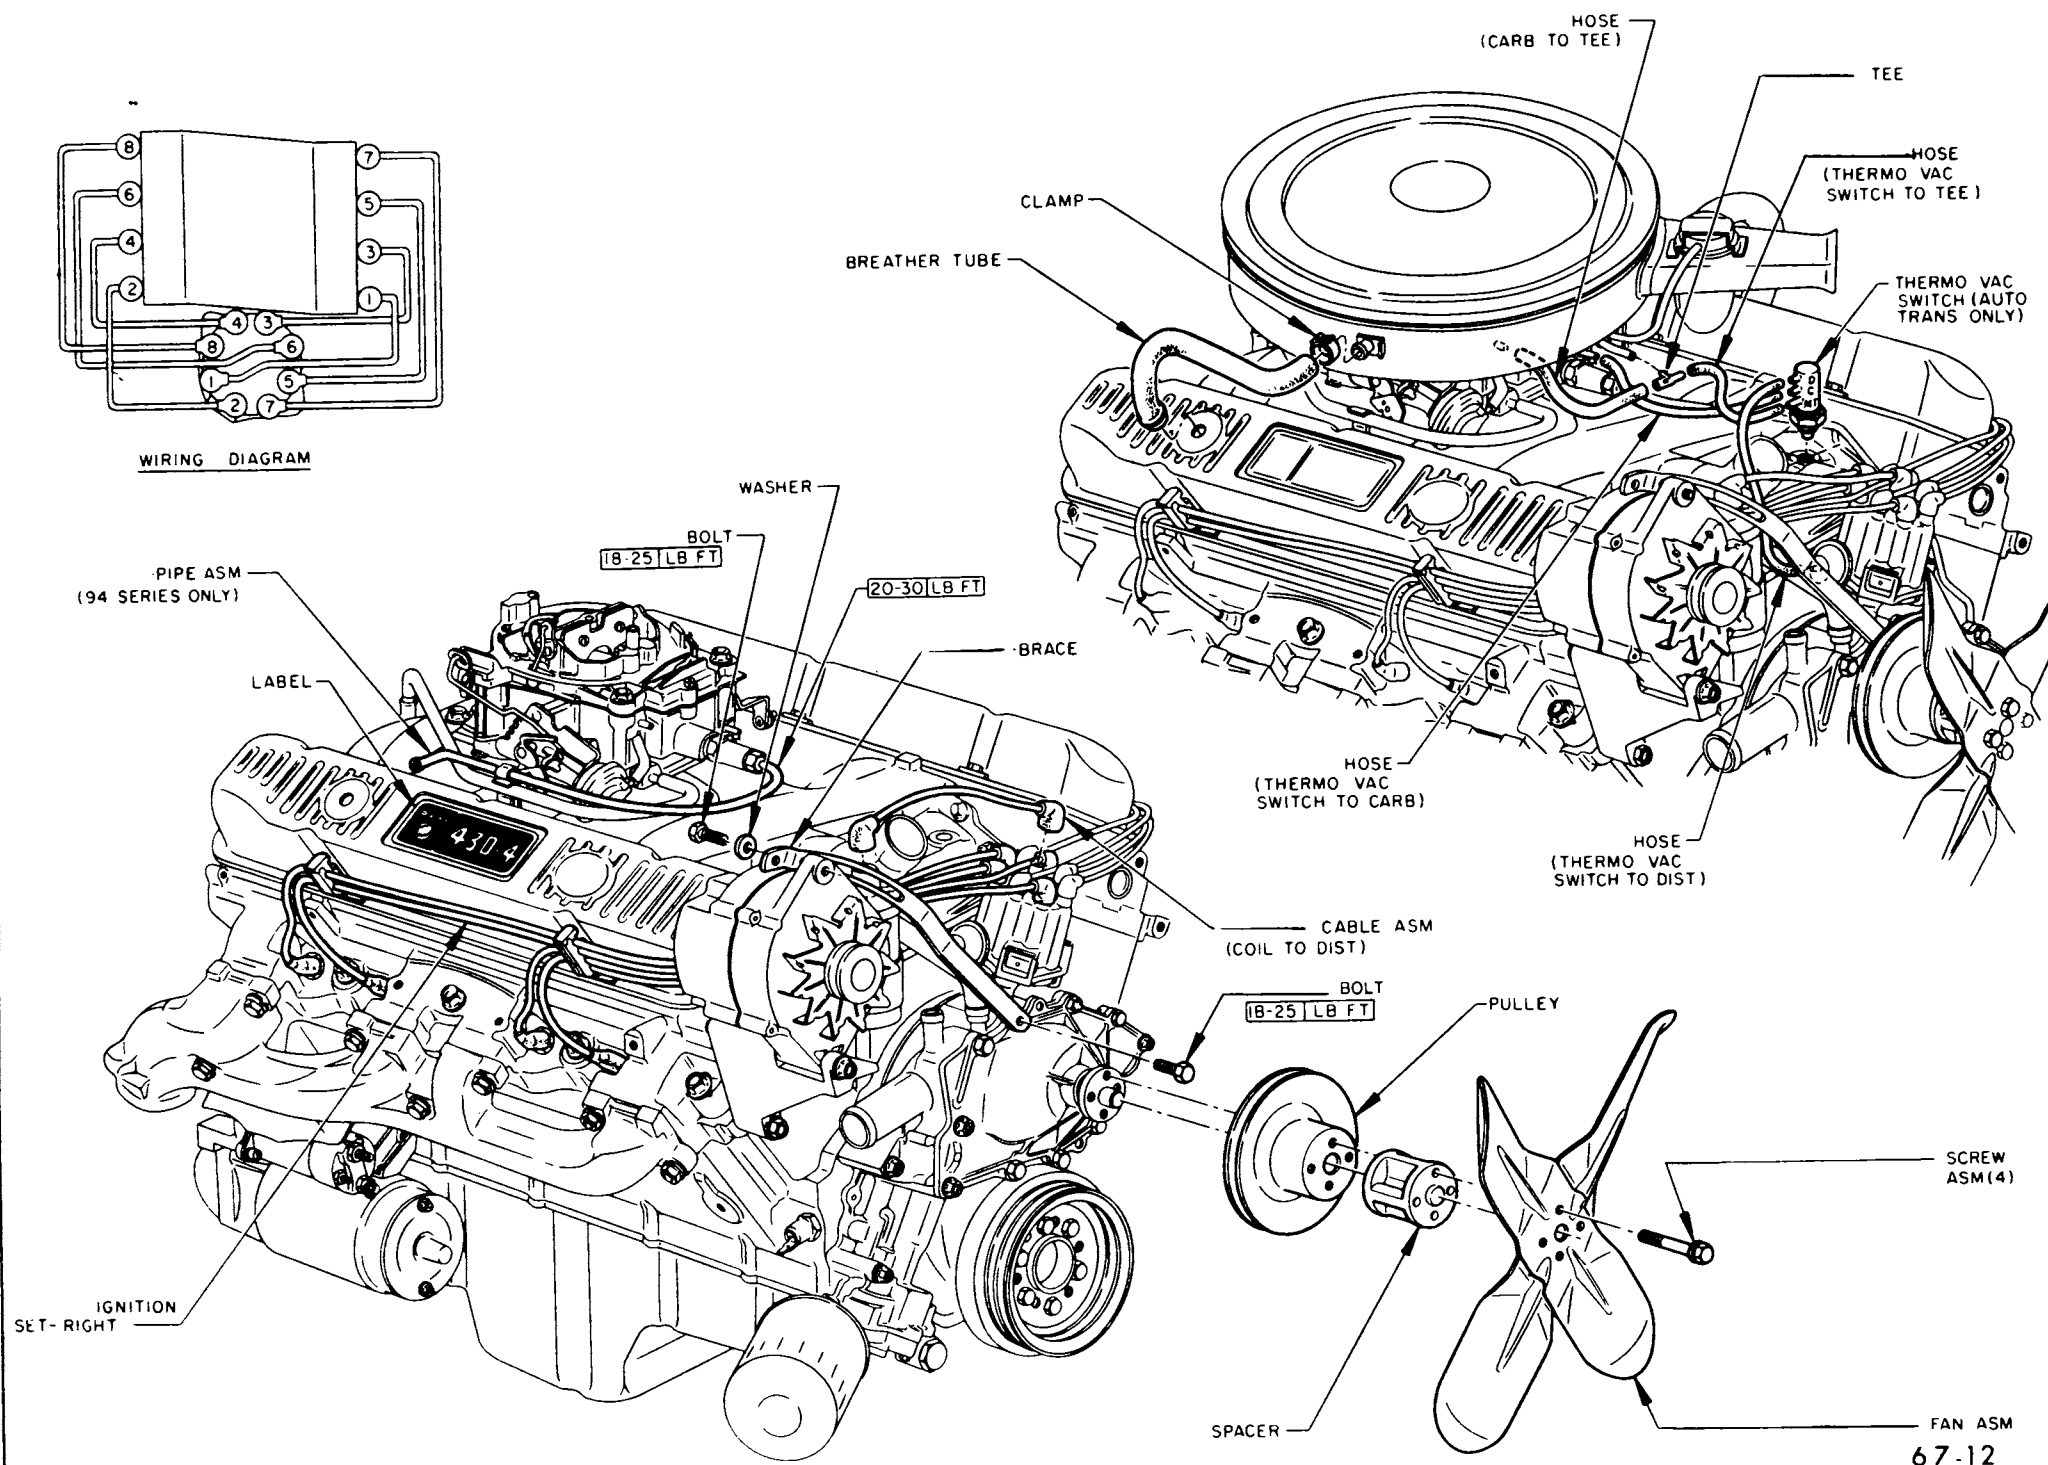


Figure 67-12—Thermo Vacuum Switch Hose Installation - 400-430 Engine